

OCULARC 3.0 DIM-TO-WARM

0 -35° Adjustable - R3BRA, R3BSA

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

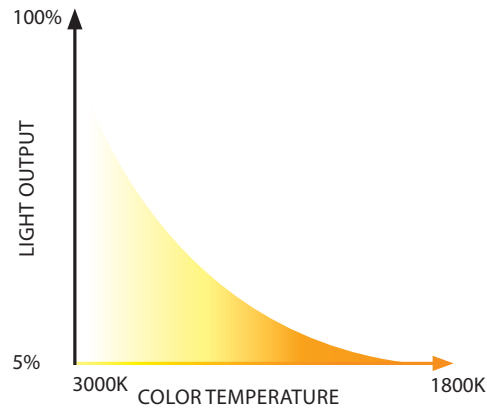
The brilliant LED recessed downlight that gradually changes to a warmer color temperature as you dim. Great for new construction projects or remodels.

FEATURES

- Dim-to-Warm color temperature range: 3000K - 1800K
- Energy Star® Rated
- Title 24 Compliant
- IC-rated Remodel and New Construction
- Airtight in New Construction and remodel
- Shallow housing under 4" depth
- Cutout 4¼"

SPECIFICATIONS

- Construction:** Die-cast aluminum trim and heat sink
- Dimming:** ELV or TRIAC or 0-10V dimming compatible
- Input:** 120V for R3BNICA-10, R3BBRT-10; 120-277V for R3BNICA-10U
- Light Source:** 11W 95 CRI Single LED Module. Rated Life: 50,000 hours
- Mounting:** Retention clips firmly hold trim to housing.
- Finish:** Powder coated
- Ceiling thickness:** ½" - 1"
- Standards:** ETL&cETL listed, Damp location listed
- Operating Temperature:** -4°F to 104°F (20°C to 40°C)



Trims (Order Housing Separately)	Model	Beam	Max Lumens	Max CBCP	Color Temp	Finish
	R3BRA Round 0 - 35° Adjustable	S 19° N 27° F 50°	985	4712	WD 3000K - 1800K	HZWT Haze/White BN Brushed Nickel WT White BK Black
	R3BSA Square 0 - 35° Adjustable	S 19° N 27° F 50°	985	4712	WD 3000K - 1800K	HZWT Haze/White BN Brushed Nickel WT White BK Black

R3BRA-__WD-WT

Example: R3BRA-SWD-WT

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

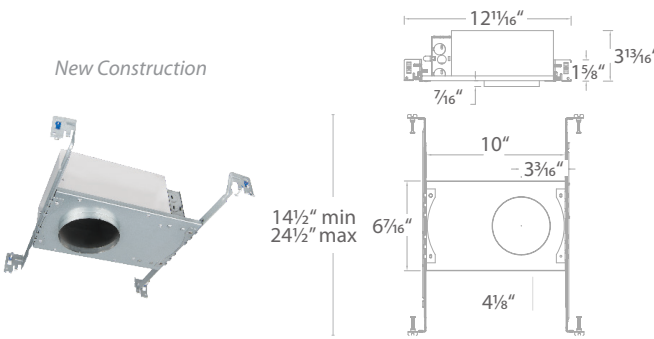
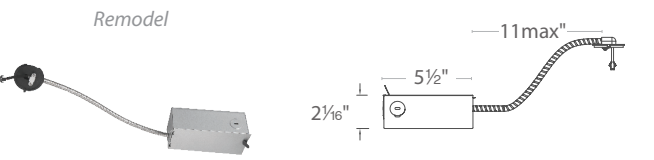
OCULARC 3.0 DIM-TO-WARM

0 -35° Adjustable - R3BRA, R3BSA

WAC LIGHTING

Responsible Lighting®

Housings (Required) - Order separately from trims

	Model	Input	Dimming	Notes
<p><i>New Construction</i></p>  <p>12¹/₁₆"</p> <p>3¹³/₁₆"</p> <p>7¹/₁₆"</p> <p>1¹/₈"</p> <p>10"</p> <p>3³/₁₆"</p> <p>6⁷/₁₆"</p> <p>4¹/₈"</p> <p>14¹/₂" min 24¹/₂" max</p>	R3BNICA-10 IC-Rated, Airtight	120V	100% - 5% TRIAC, ELV, 0-10V	Less than 4" plenum depth Allows adjustment in any direction when used with adjustable trims
	R3BNICA-10U IC-Rated, Airtight	120V - 277V	120V 100% - 5% TRIAC, ELV, 0-10V	277V 100% - 1% 0-10V
<p><i>Remodel</i></p>  <p>11max"</p> <p>5¹/₂"</p> <p>2¹/₁₆"</p>	R3BBRT-10 IC Rated	120V	100% - 5% TRIAC, ELV, 0-10V	Allows adjustment in any direction when used with adjustable trims Ceiling thickness: 1/2" - 1"

Example: **R3BNICA-10**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760