


OCULARC 3.5

Adjustable Downlight - R3CSDT, R3CSDL

WAC LIGHTING

Responsible Lighting®

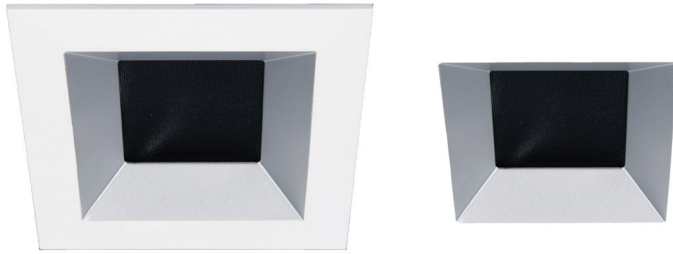

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Ocularc 3.5 offers performance features in a simple but versatile package for residential and commercial applications alike. One housing can be used for downlight, adjustable, pinhole, wall wash trims.

FEATURES

- 3 beam angle options included:
Narrow flood beam film pre-installed, interchangeable flood beam film supplied, remove film for spot beam.
- IC-Rated, Airtight, New Construction
- Adjustable LED light engine included with housing:
Vertical Adjustment 0-30°, Horizontal Adjustment 365°
- Shallow housing under 4" depth
- 5 year warranty

SPECIFICATIONS

- Construction:** Die-cast aluminum trim and heat sink
- Dimming:** 100% - 1% TRIAC, ELV
100% - 5%, 0-10V
- Input Power:** 13.5W, 120V-277V 50/60Hz
- Light Source:** High output COB LED rated life of 50,000 hours.
- Mounting:** Retention clips firmly hold trim to housing. Cutout 4¼" x 4¼"
- Finish:** Powder coated white, enamel-coated haze.
- Ceiling thickness:** ½" - 1"
- Standards:** UL & cUL, Wet location listed. Energy Star® 2.0
Title 24 JA8-2016 Compliant
- Operating Temperature:** -4°F to 104°F (-20°C to 40°C)

Trims (Order Housing Separately)

Trims (Order Housing Separately)	Model	Beam	Color Temp	Lumens	CBCP	Finish
	R3CSDT Square Trim Downlight & Adjustable	Spot 16°	927 2700K	865	5030	HZWT Haze/White WT White BK Black
			930 3000K	930	5408	
			935 3500K	950	5517	
			940 4000K	1000	5799	
		Narrow Flood 36°	927 2700K	860	1452	
			930 3000K	925	1561	
			935 3500K	940	1592	
		Flood 51°	940 4000K	990	1671	
			927 2700K	795	829	
930 3000K	855		891			
	R3CSDL Square Trimless Downlight & Adjustable	Spot 16°	935 3500K	875	909	HZ Haze WT White BK Black
			940 4000K	1000	5799	
			927 2700K	860	1452	
			930 3000K	925	1561	
		Narrow Flood 36°	935 3500K	940	1592	
			940 4000K	990	1671	
			927 2700K	795	829	
		Flood 51°	930 3000K	855	891	
			935 3500K	875	909	
940 4000K	915		953			

R3CSD ____ - ____

Example: R3CSDT-HZWT

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760

OCULARC 3.5

Adjustable Downlight - R3CSDT, R3CSDL

WAC LIGHTING

Responsible Lighting®

Housing (Required) - Order separately from trims	Model	Power	Color Temp
	R3CSN-11 IC-Rated Airtight	13.5W	927 2700K 930 3000K 935 3500K 940 4000K
<p>Remodel Trim</p>	R3CSR-11 Non IC Airtight	13.5W	927 2700K 930 3000K
<p>Remodel Trimless</p>	R3CSRL-11 Non IC Airtight	13.5W	935 3500K 940 4000K

R3CS_-11-

Example: **R3CSN-11-927**

FEATURES

- Adjustable LED light engine included with housing:
Vertical Adjustment 0-30°, Horizontal Adjustment 365°
- Trim or trimless with die-cast spackle frame included.
- Accepts one optional honeycomb louver or optical lens.

GLARE CONTROL ACCESSORIES sold separately

LENS-16	HCL	Honeycomb Louver
----------------	------------	------------------

LENS ACCESSORIES sold separately

LENS-16	AMB	Amber
	RED	Red
	FR	Frosted
	SPR	Spread
	BEL	Beam Elongating

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760