

APERTO Outdoor
3-723-15

oxygen

FIXTURE TYPE _____

LOCATION _____



PROJECT _____

DATE _____



-15 Black

- LIGHT SOURCE** 1 x 12W LED with Driver on board, 3000K, CRI 90
- LUMINAIRE POWER** 12.5W at 120V
- RATED LIFE** 50000 hr RL
- OPTIONAL COLOR TEMPERATURES** 3000K Only
- LUMEN OUTPUT** Delivered: 546 lm (LM-79)
- INPUT VOLTAGE** 120V AC, 50/60Hz
- DRIVER OUTPUT** N/A
- DIMMING** TRIAC Dimming
- CONSTRUCTION** Cast Aluminum Housing
- DIFFUSER** - Etched White Glass
- FINISHES** Black (-15)
- MOUNTING** 4" Octagonal J-Box
(Installer must provide a bead of caulk between fixture housing and mounting surface)
- STANDARDS** ETL Wet listed, Conforms to UL STD 1598,
Certified CAN/CSA STD C22.2 No 250.0.

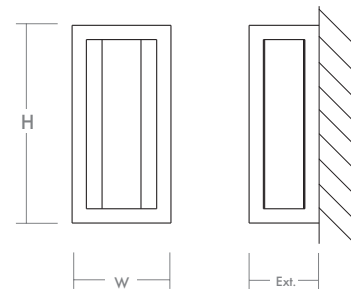

DIMENSIONS

- W:** 6.50"
- H:** 16.00"
- Ext:** 4.25"
- M.C:** 6.25" From top of fixture

Order example for standard fixture:
3-723-15 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V Only

