

CIRCULO Pendant
3-65-xx

oxygen

FIXTURE TYPE _____

LOCATION _____


PROJECT _____

DATE _____



-24 Satin Nickel

LIGHT SOURCE	LED Array, 3000K, CRI 90
LUMINAIRE POWER	72.6W at 120V
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 4408 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	1800mA, 66.3W
DIMMING	TRIAC Dimming
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- Matte White Acrylic
FINISHES	White (-6), Black (-15), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

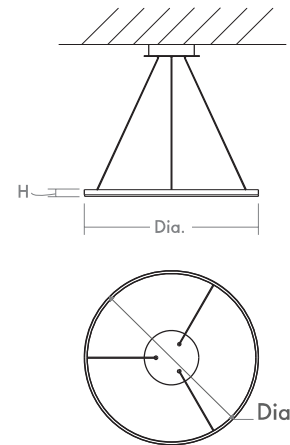

DIMENSIONS

Dia. Fixture: 31.50"

H. Fixture: 1.25"

***Hanging height adjustable
with 8ft. cables**

Order example for standard fixture:
3-65-15 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V Only

