

**DIETER Pendant**  
**3-22-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_


PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-15 Black (Lit)

<b>LIGHT SOURCE</b>	(6x) 8.5W LED Arrays, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	48.0W Input Power
<b>RATED LIFE</b>	30000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	3000K Only
<b>LUMEN OUTPUT</b>	Delivered: 2826 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	1200mA, 43.2W max power
<b>DIMMING</b>	TRIAC Dimming
<b>CONSTRUCTION</b>	Cold Rolled Steel Housing and Canopy
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	White (-6), Black (-15)
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

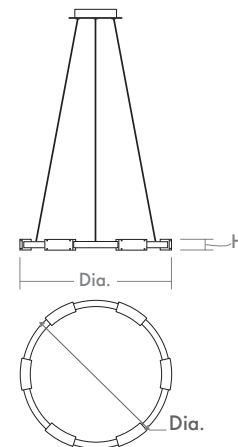

**DIMENSIONS**

**Dia. Fixture: 24.25"**  
**H. Fixture: 1.75"**  
**Supplied with 10' adjustable cable to customize hanging height**

Order example for standard fixture:  
**3-22-6** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120V Only

