

ELIF Outdoor
3-736-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-16 Gray



-22 Oiled Bronze

LIGHT SOURCE 1 x 12.1W LED, 3000K, CRI 90

LUMINAIRE POWER 14.4W at 120V

RATED LIFE 60000 hr RL

OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K

LUMEN OUTPUT Delivered: 426 lm (LM-79)

INPUT VOLTAGE 120V to 277V AC, 50/60Hz

DRIVER OUTPUT 350mA, 14.7W max power

DIMMING TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output


CONSTRUCTION Cast Aluminum and Polycarbonate

DIFFUSER - White Polycarbonate

FINISHES Gray (-16), Oiled Bronze (-22)

MOUNTING 4" Octagonal J-Box*,
4" Square J-Box* with a single device mud ring**
* Deep J-Box (Required to house driver)
** Mud ring must be mounted horizontally
(Installer must provide a bead of caulk between fixture housing and mounting surface)

STANDARDS UL Wet listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

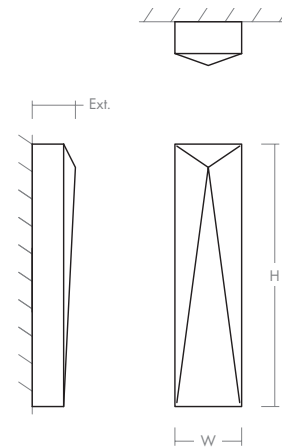

DIMENSIONS
W: 4.25"
H: 16.50"
Ext: 2.75"
M.C: 8.55" From top of fixture

Order example for standard fixture:
3-736-22 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V to 277V
 Order example for optional color temperatures: **3-736-2722**
27: 2700K, **35:** 3500K, **40:** 4000K

