

HALO Wall Sconce

3-515-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-25 Satin Copper



-14 Polished Chrome




-24 Satin Nickel



-40 Aged Brass

LIGHT SOURCE	1 x 12.1W LED, 3000K, CRI 90
LUMINAIRE POWER	14.4W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 642 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Chrome (-14), Satin Nickel (-24), Satin Copper (-25), Aged Brass (-40)
MOUNTING	2" x 3" J-Box*, 4" Octagonal J-Box, 4" Square J-Box with a single device mud ring* * Must be mounted horizontally
STANDARDS	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.
NOTE	Backplate is required

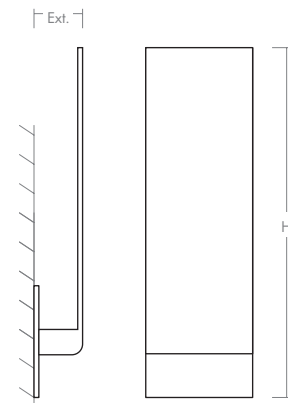

DIMENSIONS

W:	5.50"
H:	18.00"
Ext:	3.25"
M.C:	15.19" From top of fixture

Order example for standard fixture:

3-515-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-515-2724**

27: 2700K, 35: 3500K, 40: 4000K

