

LUPE Pendant
3-25-15

oxygen

FIXTURE TYPE _____

LOCATION _____


PROJECT _____

DATE _____



-15 Black (Lit)

LIGHT SOURCE	(6x) 13W LED Arrays, 3000K, CRI 90
LUMINAIRE POWER	72.6W Input Power
RATED LIFE	30000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 2829 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	2200mA, 83.6W max power
DIMMING	TRIAC Dimming
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- Matte White Acrylic
FINISHES	Black (-15)
MOUNTING	4" Octagonal J-Box
STANDARDS	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

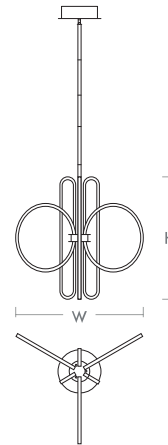

DIMENSIONS

W. Fixture: 26.325"

L. Fixture: 22.25"

H. Fixture: 23.00"

Supplied with 2-8", 2-12", and 3-16" stems to customize hanging height

Note: Canopy swivel allows up to a 45° slope

Order example for standard fixture:
3-25-15 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V Only

