

**MAIA Outdoor**  
**3-742-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-16 Gray




-22 Oiled Bronze



Top View

- LIGHT SOURCE** 2 x 12.1W LED, 3000K, CRI 90
- LUMINAIRE POWER** 28.7W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 963 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 700mA, 29.4W max power
- DIMMING** TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Cast Aluminum and Polycarbonate
- DIFFUSER** - White Polycarbonate
- FINISHES** Gray (-16), Oiled Bronze (-22)
- MOUNTING** 4" Octagonal J-Box\*\*,  
4" Square J-Box\* with a single device mud ring  
\*Deep J-Box (Required to house driver)  
\*\* Deep J-Box and Backplate required to cover J-Box  
(Installer must provide a bead of caulk between fixture housing and mounting surface)
- STANDARDS** UL Wet listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

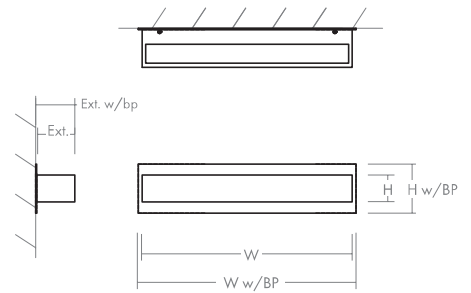

**DIMENSIONS**

- W:** 23.25"
- H:** 2.75"
- Ext:** 3.88"
- M.C:** 1.38" From top of fixture

**With optional backplate**

- W:** 24.00"
- H:** 5.00"
- Ext:** 4.00"
- M.C:** 2.50" From top of fixture

Order example for standard fixture:

**3-742-22** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120V to 277V

Order example for optional color temperatures: **3-742-2722**

**27:** 2700K, **35:** 3500K, **40:** 4000K

