

# MARIA Pendant

3-663-xxxx

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-1540 Dark Gray/Aged Brass Lit



-1624 Gray/Satin Nickel

<b>LIGHT SOURCE</b> (Not Included)	Medium Base Socket 1x 24W max PAR20/30/38, A19, A21 <b>Lamp Not Included</b>
<b>LUMINAIRE POWER</b>	Fixture certified for use with 24W medium base LED lamp
<b>INPUT VOLTAGE</b>	120V AC, 50/60Hz
<b>CONSTRUCTION</b>	Concrete and Steel
<b>DIFFUSER</b>	- Concrete
<b>FINISHES</b>	Dark Gray/Aged Brass (-1540), Gray/Satin Nickel (-1624)
<b>MOUNTING</b>	4" Octagonal J-Box *Junction box must be securely mounted to building structure and capable of supporting at least 50 pounds.
<b>STANDARDS</b>	cUL Damp Listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

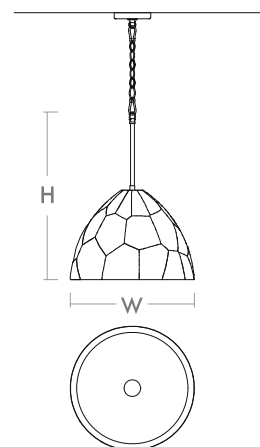

## DIMENSIONS

Dia. Fixture: 16.00"

H. Fixture: 21.875"

\* Measured using 1-8" stem for  
minimum hanging height

Weight: 31.5 lbs.

Supplied with 2-8", 2-12", and 2-16"  
stems plus 1' of chain

Order example for standard fixture:

**3-663-1540** (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V Only

