

METRIX Vanity
3-542-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
PROJECT _____ DATE _____




-24 Satin Nickel



-20 Polished Nickel

LIGHT SOURCE	1 x 11.7W LED, 3000K, CRI 90
LUMINAIRE POWER	14.2W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 1083 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Nickel (-20), Satin Nickel (-24)
MOUNTING	2" x 3" J-Box, 4" Octagonal J-Box, 4" Square J-Box with a single device mud ring
STANDARDS	UL Dry/Damp listed, ADA Compliant, CEC Title 24 Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

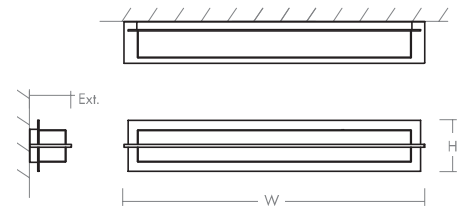

DIMENSIONS

W:	28.00"
H:	4.75"
Ext:	3.88"
M.C:	2.38" From top of fixture

Order example for standard fixture:

3-542-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-542-2724**

27: 2700K, 35: 3500K, 40: 4000K

