

MONDO Pendant
3-6900-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
PROJECT _____ DATE _____



-40 Aged Brass




-15 Black



-24 Satin Nickel

LIGHT SOURCE	1 x 6.1W LED, 3000K, CRI 90
LUMINAIRE POWER	6.95W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 394 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	180mA, 7.6W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- Matte White Glass
FINISHES	Black (-15), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box*, 4" Square J-Box* with a single device mud ring *Deep J-Box (Required to house driver)
STANDARDS	UL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

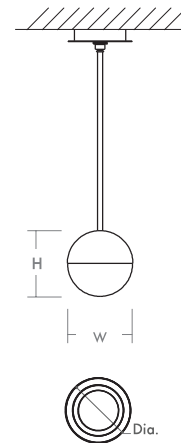

DIMENSIONS

W. Fixture: 6.00"
H. Fixture: 6.00"
Supplied with 2-8", 2-12", and 3-16"
stems to customize hanging height

Note: Canopy swivel allows up to a 22° slope

Order example for standard fixture:

3-6900-15 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-6900-2715**

27: 2700K, **35:** 3500K, **40:** 4000K

