

**MONDO Pendant**  
**3-6903-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-40 Aged Brass




-15 Black



-24 Satin Nickel

|                                    |  |
|------------------------------------|--|
| <b>LIGHT SOURCE</b>                | 1 x 10.1W LED, 3000K, CRI 90   |
| <b>LUMINAIRE POWER</b>             | 11.73W at 120V   |
| <b>RATED LIFE</b>                  | 60000 hr RL  |
| <b>OPTIONAL COLOR TEMPERATURES</b> | 2700K, 3500K, 4000K  |
| <b>LUMEN OUTPUT</b>                | Delivered: 564 lm (LM-79)  |
| <b>INPUT VOLTAGE</b>               | 120V to 277V AC, 50/60Hz   |
| <b>DRIVER OUTPUT</b>               | 350mA, 14.7W max power   |
| <b>DIMMING</b>                     | TRIAC and ELV dimming at 120V AC;<br>0-10V dimming, 100% to 1% current output                                    |
| <b>CONSTRUCTION</b>                | Cold Rolled Steel Housing and Canopy   |
| <b>DIFFUSER</b>                    | - Matte White Glass  |
| <b>FINISHES</b>                    | Black (-15), Satin Nickel (-24),<br>Aged Brass (-40)   |
| <b>MOUNTING</b>                    | 4" Octagonal J-Box*,<br>4" Square J-Box* with a single device mud ring<br>*Deep J-Box (Required to house driver) |
| <b>STANDARDS</b>                   | UL Damp listed, Conforms to UL STD 1598,<br>Certified CAN/CSA STD C22.2 No 250.0.                                |

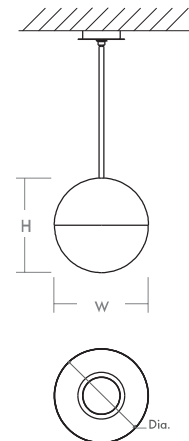

**DIMENSIONS**

**W. Fixture: 12.00"**  
**H. Fixture: 12.00"**  
**Supplied with 2-8", 2-12", and 3-16"**  
**stems to customize hanging height.**

Note: Canopy swivel allows up to a 22° slope

Order example for standard fixture:

**3-6903-40** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120V to 277V

Order example for optional color temperatures: **3-6903-2740**

**27:** 2700K, **35:** 3500K, **40:** 4000K

