

OPUS Pendant

3-654-xxx

oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-14 Polished Chrome



-24 Satin Nickel



-25 Satin Copper



-40 Aged Brass

Diffusers:




-1 White Opal Glass



- Matte White Acrylic

LIGHT SOURCE	1 x 6.1W LED, 3000K, CRI 90
LUMINAIRE POWER	7.2W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: (-1) Glass: 412 lm (LM-79) Acrylic: 399 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	180mA, 7.6W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic or Glass
DIFFUSER/ METAL FINISHES	(-114) White Opal Glass/Polished Chrome (-124) White Opal Glass/Satin Nickel (-125) White Opal Glass/Satin Copper (-140) White Opal Glass/Aged Brass (-14) Matte White Acrylic/Polished Chrome (-24) Matte White Acrylic/Satin Nickel (-25) Matte White Acrylic/Satin Copper (-40) Matte White Acrylic/Aged Brass
MOUNTING	4" Octagonal J-Box *, 4" Square J-Box * with a single device mud ring * Deep J-Box (Required to house driver)
STANDARDS	UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

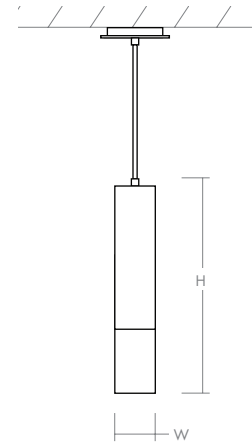

DIMENSIONS

Dia. Canopy: 5.88"

Dia. Fixture: 3.50"

H. Fixture: 18.00"

Supplied with 10 ft braided cord

Order example for standard fixture:

3-654-124 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-654-27124**

27: 2700K, **35:** 3500K, **40:** 4000K

