

ORION Wall Sconce
3-540-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____


DATE _____



-24 Satin Nickel




-14 Polished Chrome

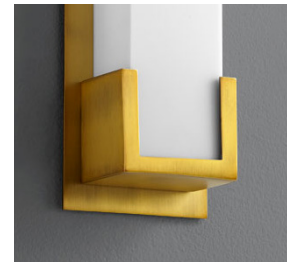

-40 Aged Brass

LIGHT SOURCE	1 x 12.1W LED, 3000K, CRI 90
LUMINAIRE POWER	14.7W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 926 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Chrome (-14), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Square J-Box*, 4" Square J-Box* with a single device mud ring** *Deep J-Box (Required to house driver) **Mud ring must be mounted horizontally
STANDARDS	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

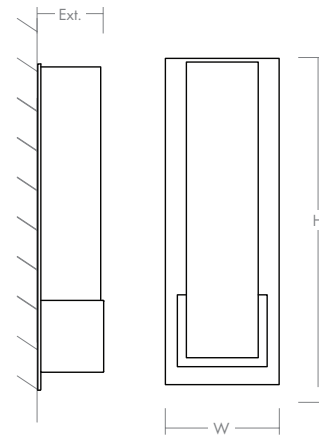

DIMENSIONS

W:	4.75"
H:	13.50"
Ext:	2.75"
M.C:	10.78" From top of fixture

Order example for standard fixture:

3-540-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-540-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

