


**PRESTO! Chandelier**  
**3-657-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
 PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-15 Black

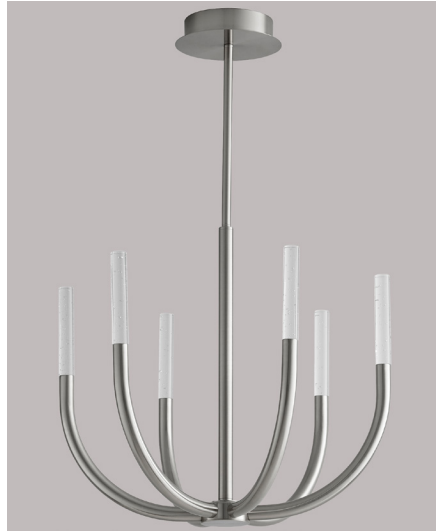


-24 Satin Nickel



-40 Aged Brass

- LIGHT SOURCE** (6x) 4.8W LED Arrays, 3000K, CRI 90
- LUMINAIRE POWER** 32W at 120V
- RATED LIFE** 26000 hr RL
- OPTIONAL COLOR TEMPERATURES** 3000K Only
- LUMEN OUTPUT** Delivered: 623.5 lm (LM-79)
- INPUT VOLTAGE** 120V AC, 50/60Hz
- DRIVER OUTPUT** 900mA, 32.4W max power
- DIMMING** TRIAC and ELV Dimming
- CONSTRUCTION** Cold Rolled Steel Housing and Canopy
- DIFFUSER** - Clear Bubble Glass
- FINISHES** Black (-15), Satin Nickel (-24), Aged Brass (-40)
- MOUNTING** 4" Octagonal J-Box
- STANDARDS** cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

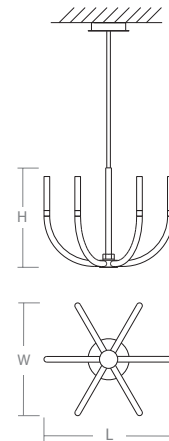

**DIMENSIONS**

- Dia. Canopy:** 5.875" / 7.1" Disk
- W. Fixture:** 22.25"
- L. Fixture:** 22.25"
- H. Fixture:** 19.5"
- Supplied with 2-8", 2-12", and 3-16" stems to customize hanging height

Order example for standard fixture:  
**3-657-15** (x- Voltage - xxx-Sequence # - xx-Finish)  
 3: 120V Only

