

Pyxis Wall Sconce / Ceiling Mount

3-610-xx


oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____

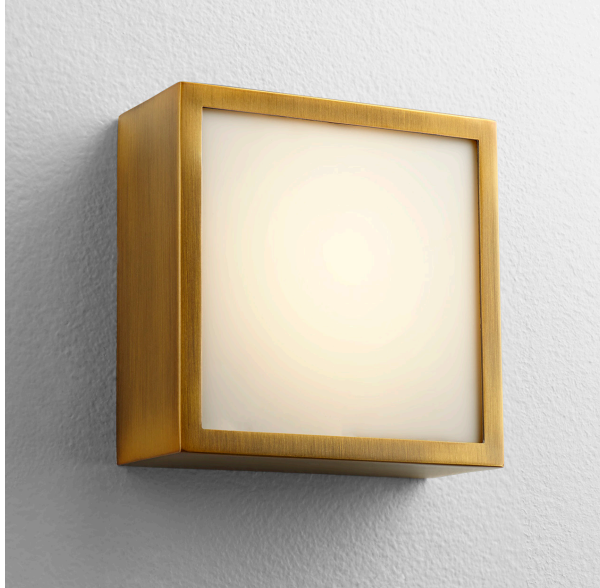

-40 Aged Brass




-22 Oiled Bronze



-24 Satin Nickel

LIGHT SOURCE	1 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	12.4W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 518 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box*, 4" Square J-Box* with a single device mud ring *Deep J-Box (Required to house driver)
STANDARDS	UL Dry/Damp listed, ADA Compliant, CEC Title 24 Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.



DIMENSIONS

- W:** 4.75"
- L:** 4.75"
- H:** 2.00"
- M.C:** 2.38" From top of fixture

Order example for standard fixture:
3-610-22 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V to 277V

Order example for optional color temperatures: **3-610-2722**
27: 2700K, **35:** 3500K, **40:** 4000K

