

# Pyxis Wall Sconce / Ceiling Mount

## 32-612-xx

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-40 Aged Brass




-20 Polished Nickel



-24 Satin Nickel

<b>LIGHT SOURCE</b>	1 x 22.2W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	26.1W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 1329 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V & 277V AC, 50/60Hz
<b>DRIVER OUTPUT*</b>	25.2W max power @600mA
<b>DIMMING</b>	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
<b>CONSTRUCTION</b>	Plated Steel and Acrylic
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	Polished Nickel (-20), Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	4" Octagonal J-Box, 2" x 3" J-box
<b>STANDARDS</b>	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

\*600-1200mA programmable driver, 50.4W max power @1200mA

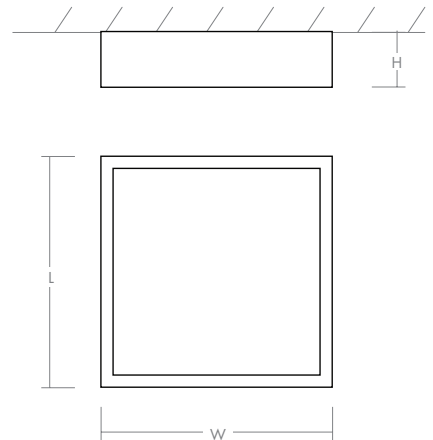

**DIMENSIONS**

<b>W:</b>	<b>10.25"</b>
<b>L:</b>	<b>10.25"</b>
<b>H:</b>	<b>3.25"</b>
<b>M.C:</b>	<b>5.13" From top of fixture</b>

Order example for standard fixture:

**32-612-24** (x- Voltage - xxx-Sequence # - xx-Finish)

**32:** 120V & 277V

Order example for optional color temperatures: **32-612-2724**

**27:** 2700K, **35:** 3500K, **40:** 4000K

