

TALI Chandelier

3-603-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____




-24 Satin Nickel



-40 Aged Brass

LIGHT SOURCE	LED Arrays, 3000K, CRI 90
LUMINAIRE POWER	29.5W at 120V
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 834 lm (LM-79)
INPUT VOLTAGE	120V AC, 60Hz
DRIVER OUTPUT	720mA, 26W max power
DIMMING	TRIAC Dimming
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- Clear Bubble Acrylic
FINISHES	Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

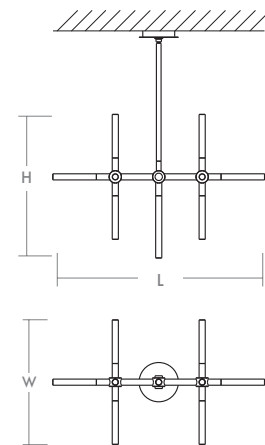

DIMENSIONS

- Dia. Canopy:** 6.69"
 - W. Fixture:** 20.00"
 - L. Fixture:** 34.00"
 - H. Fixture:** 23.125"
- Supplied with 2-8", 2-12", and 3-16" stems to customize hanging height

Note: Canopy swivel allows up to a 22° slope

Order example for standard fixture:
3-603-24 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V Only

