

**UNO Outdoor**  
**3-700-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_





-16 Gray



-22 Oiled Bronze

- LIGHT SOURCE** 1 x 10.1W LED, 3000K, CRI 90
- LUMINAIRE POWER** 12.4W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 308 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 350mA, 14.7W max power
- DIMMING** TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Cast Aluminum and Glass
- DIFFUSER** - Frosted Glass
- FINISHES** Gray (-16), Oiled Bronze (-22)
- MOUNTING** 4" Octagonal J-Box  
(Installer must provide a bead of caulk between fixture housing and mounting surface)
- STANDARDS** UL Wet listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

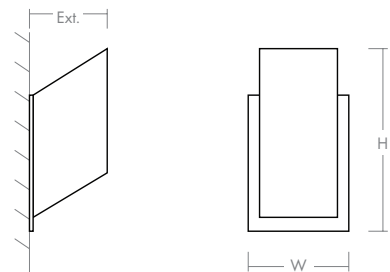

**DIMENSIONS**

- W:** 5.25"
- H:** 9.25"
- Ext:** 4.00"
- M.C:** 6.10" From top of fixture

Order example for standard fixture:  
**3-700-22** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120V to 277V

Order example for optional color temperatures: **3-700-2722**  
27: 2700K, 35: 3500K, 40: 4000K

