


ZORA Wall Sconce

3-52-xxxx


oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____

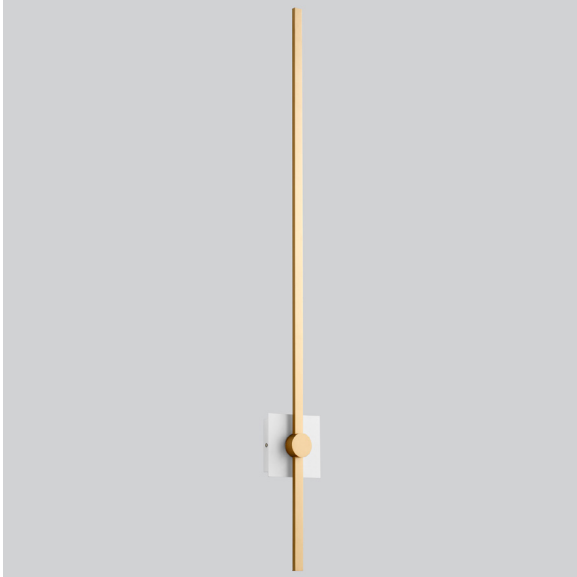

-650 White/Industrial Brass

LIGHT SOURCE	(1x) 24.8W LED Array, 3000K, CRI 90
LUMINAIRE POWER	24.5W Input Power
RATED LIFE	30000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 1216 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	580mA, 23.2W max power
DIMMING	TRIAC Dimming
CONSTRUCTION	Cold Rolled Steel Housing and Aluminum
DIFFUSER	- Matte White Acrylic
FINISHES	White/Industrial Brass (-650), Black/Industrial Brass (-1550)
MOUNTING	4" Octagonal J-Box
STANDARDS	cETL Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

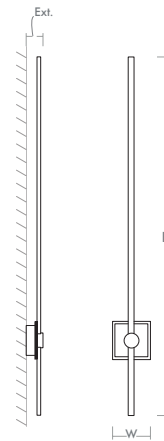

DIMENSIONS

W:	5.13"
H:	47.50"
Ext:	2.19"
M.C:	37.50" From top of fixture

Fixture can swivel/rotate 45 degrees

Order example for standard fixture:
3-52-650 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V Only

