

# Prop Light Suspended

BERTJAN POT



"We have round lights, we have straight lights. We have them with lights on one side, we have them with lights on two sides. You can hang them high, low, horizontally, vertically or even hang them in an angle. Put them on the floor, hang them on your wall or down from the ceiling. We find it very hard to imagine an interior where this prop is not in place" - Bertjan Pot

---

## *Detailing*



A theatrical, extravagant look that is suitable for spaces with both low and high ceilings.

---

## *Colours*

2000K

Warm White

2700K

Soft White


# Prop Light Suspended / Double

## Dimensions

98cm | 38.6"



18cm | 7.1"



17cm | 6.7"

## Product

**WIDTH** 98cm | 38.6"

**HEIGHT** 18cm | 7.1"

**DEPTH** 18cm | 7.1"

**WEIGHT NETTO** 6kg | 13.23lbs

## Packaging

**WIDTH** 30cm | 11.8"

**HEIGHT** 30cm | 11.8"

**CUBAGE** 0.12m<sup>3</sup> | 4.23ft<sup>3</sup>

**LENGTH** 133cm | 52.4"

**WEIGHT** 10kg | 22.05lbs

## Technical CE

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

### LIGHTSOURCE TYPE

LED

### NUMBER OF LIGHTSOURCES

36

### INPUT VOLTAGE

110-240

### MAX POWER CONSUMPTION

21W

### LAMPHOLDER

LED (Solid state)

### CABLE COLOUR

Transparent with tinned cores

### CANOPY

Pebble II White, ABS

### LIGHT DIRECTION

All directions

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE INCLUDED

Yes

### SHAPE

Linear

### FREQUENCY

50/60

### DIMMABLE

Yes

### LIFETIME

50000 hours

### CABLE LENGTH

400cm | 157.5"

### CRI

80

### LIGHT OUTPUT

1600 lm

## Technical cULus

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

### LIGHTSOURCE TYPE

LED

### NUMBER OF LIGHTSOURCES

36

### INPUT VOLTAGE

110-240

### MAX POWER CONSUMPTION

21W

### LAMPHOLDER

LED (Solid state)

### CABLE COLOUR

Transparent with tinned cores

### CANOPY

Pebble II White, ABS

### LIGHT DIRECTION

All directions

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE INCLUDED

Yes

### SHAPE

Linear

### FREQUENCY

50/60

### DIMMABLE

Yes

### LIFETIME

50000 hours

### CABLE LENGTH

400cm | 157.5"

### CRI

80


### LIGHT OUTPUT

1600 lm


## Prop Light Suspended / Double Horizontal

### Dimensions

98cm | 38.6"



17cm | 6.7"



18cm | 7.1"

### Product

**WIDTH** 98cm | 38.6"

**HEIGHT** 18cm | 7.1"

**DEPTH** 17cm | 6.7"

**WEIGHT NETTO** 6kg | 13.23lbs

### Packaging

**WIDTH** 30cm | 11.8"

**HEIGHT** 30cm | 11.8"

**CUBAGE** 0.12m<sup>3</sup> | 4.23ft<sup>3</sup>

**LENGTH** 133cm | 52.4"

**WEIGHT** 10kg | 22.05lbs

## Technical CE

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

36

### SHAPE

Linear

### INPUT VOLTAGE

110-240

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

21W

### DIMMABLE

Yes

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Transparent with tinned cores

### CABLE LENGTH

400cm | 157.5"

### CANOPY

Pebble II White, ABS

### CRI

80

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

1600 lm

---

## Technical cULus

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

36

### SHAPE

Linear

### INPUT VOLTAGE

110-240

### FREQUENCY

50/60

**MAX POWER CONSUMPTION**

21W

**LAMPHOLDER**

LED (Solid state)

**CABLE COLOUR**

Transparent with tinned cores

**CANOPY**

Pebble II White, ABS

**LIGHT DIRECTION**

All directions

**DIMMABLE**

Yes

**LIFETIME**

50000 hours

**CABLE LENGTH**

400cm | 157.5"

**CRI**


80

**LIGHT OUTPUT**

1600 lm

## Prop Light Suspended / Double Vertical

### Dimensions

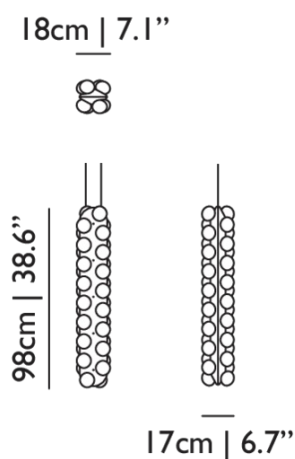

### Product

**WIDTH** 17cm | 6.7"**HEIGHT** 98cm | 38.6"**DEPTH** 18cm | 7.1"**WEIGHT NETTO** 6kg | 13.23lbs

### Packaging

**WIDTH** 30cm | 11.8"**HEIGHT** 30cm | 11.8"**CUBAGE** 0.12m<sup>3</sup> | 4.23ft<sup>3</sup>**LENGTH** 133cm | 52.4"**WEIGHT** 10kg | 22.05lbs

### Technical CE

**ADDITIONAL**

The Proplight is available in two colour temperatures: 2000K or 2700K.

**MATERIAL**

HIPS housing, PMMA light guide, glass bulbs.

**ENERGY LABEL****INSTALLATION REQUIRED**

Yes

**LIGHTSOURCE TYPE**

LED

**LIGHTSOURCE INCLUDED**

Yes

**NUMBER OF LIGHTSOURCES**

36

**SHAPE**

Linear

**INPUT VOLTAGE**

110-240

**FREQUENCY**

50/60

**MAX POWER CONSUMPTION**

21W

**LAMPHOLDER**

LED (Solid state)

**CABLE COLOUR**

Transparent with tinned cores

**CANOPY**

Pebble II White, ABS

**LIGHT DIRECTION**

All directions

**DIMMABLE**

Yes

**LIFETIME**

50000 hours

**CABLE LENGTH**

400cm | 157.5"; 1000cm | 393.7"

**CRI**

80

**LIGHT OUTPUT**

1600 lm

*Technical cULus***ADDITIONAL**

The Proplight is available in two colour temperatures: 2000K or 2700K.

**MATERIAL**

HIPS housing, PMMA light guide, glass bulbs.

**ENERGY LABEL****INSTALLATION REQUIRED**

Yes

**LIGHTSOURCE TYPE**

LED

**LIGHTSOURCE INCLUDED**

Yes

**NUMBER OF LIGHTSOURCES**

36

**SHAPE**

Linear

**INPUT VOLTAGE**

110-240

**FREQUENCY**

50/60

**MAX POWER CONSUMPTION**

21W

**DIMMABLE**

Yes

**LAMPHOLDER**

LED (Solid state)

**LIFETIME**

50000 hours

**CABLE COLOUR**

Transparent with tinned cores

**CABLE LENGTH**

400cm | 157.5"

**CANOPY**

Pebble II White, ABS

**CRI**

80

**LIGHT DIRECTION**

All directions



**LIGHT OUTPUT**

1600 lm

# Prop Light Suspended / Round Double

## Dimensions

73cm | 28.7"



## Product

**WIDTH** 73cm | 28.7"

**HEIGHT** 25cm | 9.8"

**DEPTH** 73cm | 28.7"

**DIAMETER** 73cm | 28.7"

**WEIGHT NETTO** 9kg | 19.84lbs

## Packaging

**WIDTH** 88cm | 34.6"

**HEIGHT** 34cm | 13.4"

**CUBAGE** 0.27m<sup>3</sup> | 9.4ft<sup>3</sup>

**LENGTH** 89cm | 35"

**WEIGHT** 15kg | 33.07lbs

## Technical CE

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

Energy Label B

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

96

### SHAPE

Disc

### INPUT VOLTAGE

110-240

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

41W

### DIMMABLE

Yes

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Transparent with tinned cores

### CABLE LENGTH

400cm | 157.5"

### CANOPY

Pebble II White, ABS

### CRI

80

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

1936 lm

## Technical cULus

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

Energy Label B

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

96

### SHAPE

Disc

### INPUT VOLTAGE

110-240

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

41W

### DIMMABLE

Yes

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Transparent with tinned cores

### CABLE LENGTH

400cm | 157.5"

### CANOPY

Pebble II White, ABS

### CRI

80

### LIGHT DIRECTION

All directions


### LIGHT OUTPUT

1936 lm


## Prop Light Suspended / Round Double Vertical

### Dimensions

73cm | 28.7"



25cm | 9.8"



### Product

**WIDTH** 0cm | 0"

**HEIGHT** 0cm | 0"

**DEPTH** 25cm | 9.8"

**DIAMETER** 0cm | 0"

**WEIGHT NETTO** 15kg | 33.07lbs

### Packaging

**WIDTH** 88cm | 34.6"

**HEIGHT** 34cm | 13.4"

**CUBAGE** 0.27m<sup>3</sup> | 9.4ft<sup>3</sup>

**LENGTH** 89cm | 35"

**WEIGHT** 15kg | 33.07lbs



## Technical CE

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

Energy Label B

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

96

### SHAPE

Disc

### INPUT VOLTAGE

110-240

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

21W

### DIMMABLE

Yes

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Transparent with tinned cores

### CABLE LENGTH

400cm | 157.5"

### CANOPY

Pebble II White, ABS

### CRI

80

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

1936 lm

---

## Technical cULus

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

Energy Label B

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

96

### SHAPE

Disc

### INPUT VOLTAGE

110-240

### FREQUENCY

50/60

**MAX POWER CONSUMPTION**

21W

**LAMPHOLDER**

LED (Solid state)

**CABLE COLOUR**

Transparent with tinned cores

**CANOPY**

Pebble II White, ABS

**LIGHT DIRECTION**

All directions

**DIMMABLE**

Yes

**LIFETIME**

50000 hours

**CABLE LENGTH**

400cm | 157.5"

**CRI**

80



**LIGHT OUTPUT**

1936 lm

## Prop Light Suspended / Round Single

### Dimensions

73cm | 28.7"



19cm | 7.5"

### Product

**WIDTH** 73cm | 28.7"**HEIGHT** 19cm | 7.5"**DEPTH** 73cm | 28.7"**DIAMETER** 73cm | 28.7"**WEIGHT NETTO** 7kg | 15.43lbs

### Packaging

**WIDTH** 88cm | 34.6"**HEIGHT** 34cm | 13.4"**CUBAGE** 0.27m<sup>3</sup> | 9.4ft<sup>3</sup>**LENGTH** 89cm | 35"**WEIGHT** 15kg | 33.07lbs

### Technical CE

**ADDITIONAL**

The Proplight is available in two colour temperatures: 2000K or 2700K.

**MATERIAL**

HIPS housing, PMMA light guide, glass bulbs.

**ENERGY LABEL**

Energy Label B

**LIGHTSOURCE TYPE**

LED

**NUMBER OF LIGHTSOURCES**

48

**INPUT VOLTAGE**

110-240

**INSTALLATION REQUIRED**

Yes

**LIGHTSOURCE INCLUDED**

Yes

**SHAPE**

Disc

**FREQUENCY**

50/60

**MAX POWER CONSUMPTION**

21W

**DIMMABLE**

Yes

**LAMPHOLDER**

LED (Solid state)

**LIFETIME**

50000 hours

**CABLE COLOUR**

Transparent with tinned cores

**CABLE LENGTH**

400cm | 157.5"

**CANOPY**

Pebble II White, ABS

**CRI**

80

**LIGHT DIRECTION**

All directions

**LIGHT OUTPUT**

1078 lm

*Technical cULus***ADDITIONAL**

The Proplight is available in two colour temperatures: 2000K or 2700K.

**MATERIAL**

HIPS housing, PMMA light guide, glass bulbs.

**ENERGY LABEL**

Energy Label B

**INSTALLATION REQUIRED**

Yes

**LIGHTSOURCE TYPE**

LED

**LIGHTSOURCE INCLUDED**

Yes

**NUMBER OF LIGHTSOURCES**

48

**SHAPE**

Disc

**INPUT VOLTAGE**

110-240

**FREQUENCY**

50/60

**MAX POWER CONSUMPTION**

21W

**DIMMABLE**

Yes

**LAMPHOLDER**

LED (Solid state)

**LIFETIME**

50000 hours

**CABLE COLOUR**

Transparent with tinned cores

**CABLE LENGTH**

400cm | 157.5"

**CANOPY**

Pebble II White, ABS

**CRI**

80

**LIGHT DIRECTION**

All directions

**LIGHT OUTPUT**

1085 lm


# Prop Light Suspended / Single

## Dimensions

98cm | 38.6"



18cm | 7.1"



13cm | 5.1"

## Product

**WIDTH** 98cm | 38.6"

**HEIGHT** 13cm | 5.1"

**DEPTH** 18cm | 7.1"

**WEIGHT NETTO** 5kg | 11.02lbs

## Packaging

**WIDTH** 30cm | 11.8"

**HEIGHT** 30cm | 11.8"

**CUBAGE** 0.12m<sup>3</sup> | 4.23ft<sup>3</sup>

**LENGTH** 133cm | 52.4"

**WEIGHT** 10kg | 22.05lbs

## Technical CE

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

### LIGHTSOURCE TYPE

LED

### NUMBER OF LIGHTSOURCES

18

### INPUT VOLTAGE

110-240

### MAX POWER CONSUMPTION

21W

### LAMPHOLDER

LED (Solid state)

### CABLE COLOUR

Transparent with tinned cores

### CANOPY

Pebble II White, ABS

### LIGHT DIRECTION

All directions

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE INCLUDED

Yes

### SHAPE

Linear

### FREQUENCY

50/60

### DIMMABLE

Yes

### LIFETIME

50000 hours

### CABLE LENGTH

400cm | 157.5"

### CRI

80

### LIGHT OUTPUT

499 lm

## Technical cULus

### ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

### MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

### ENERGY LABEL

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

18

### SHAPE

Linear

### INPUT VOLTAGE

110-240

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

21W

### DIMMABLE

Yes

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Transparent with tinned cores

### CABLE LENGTH

400cm | 157.5"

### CANOPY

Pebble II White, ABS

### CRI

80

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

499 lm

---

## Dimmer

For fluent dimming behaviour we advise a dimmer that is compatible with the following specs.

Please note the functioning of the dimmer and the power supply combination can never be predicted, it always needs to be tested in practice.

### DIMMER TYPE

Mains dimmable (trailing edge / reverse phase)

### LOAD TYPE

Capacitive load (C-Type)

---