
ITEM NO: 1-1832-5-322 1-1832-5-89



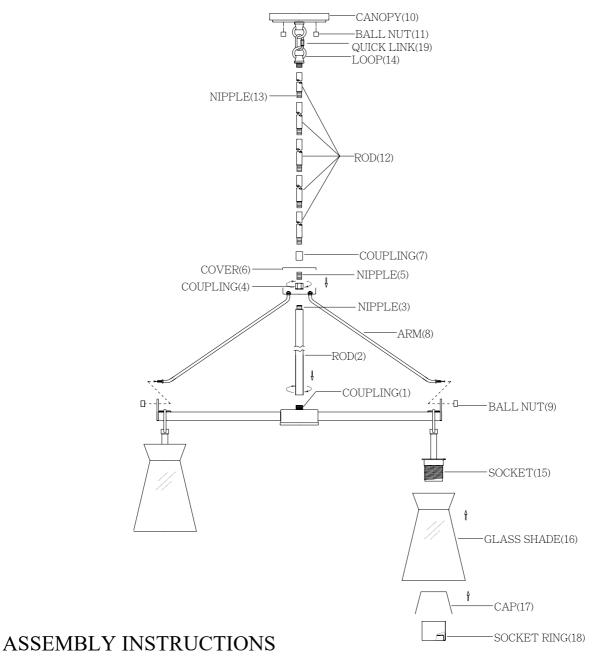

- 1. Carefully unpack and identify all parts referring to illustration for parts identification.
- 2. Turn the power to the installation point OFF.
- 3. Install the rod (2) onto the coupling (1).
- 4. Install the nipple (3) into the coupling (4), nipple (5), cover (6), and secure them with coupling (7).
- 5. Install the arms (8), then secure them with ball nuts (9).
- 6. Passing wires through the center holes as you go, assemble the rods (12) together using the nipples (13). Attach the bottom end of rod (12) into the coupling (7) tightly, then secure the loop (14) onto the tube (12).
- 7. Use quick link (19) to connect the loop (14) to the loop on the canopy (10) and twist the locking mechanism to secure.
- 8. Install the glass shade (16) onto the socket (15). Insert the cap (17), then secure them with socket ring (18).
- 9. Refer to the additional installation instructions included with the product for wiring and installation.
- 10. Install proper bulbs (not included) into each socket referring to the markings and/or labels on the fixture for maximum wattage.
- 11. Restore power to the installation point and retain this sheet for future reference.