

SOLITUDE PENDANT

PRODUCT FEATURES

- Features clean sleek lines with its classic geometric rectangular design
- Made of pressed glass making a simple, yet modern statement
- Ideal for kitchen island task lighting, bedroom lighting and commercial lighting applications
- Available lamping options include energy efficient LED and halogen
- Fully dimmable halogen or LED lamping options create the desired ambiance
- Protected by a 1-year warranty



Frost



Frost

LAMPING

Includes low-voltage, 35 watt halogen bi-pin lamp or 6 watt, 300 delivered lumen, 3000K, replaceable Tech Lighting LED module and six feet of field-cutable suspension cable. Dimmable with low-voltage electronic or magnetic dimmer (based on transformer).

ORDERING INFORMATION

| 700 | SYSTEM | SLD | COLOR | FINISH | LAMP |
|-----|--------------|-----|---------|----------------|---|
| | FJ FREEJACK | | F FROST | R AGED BRASS | 12 VOLT HALOGEN (T20) |
| | MP MONOPOINT | | | S SATIN NICKEL | -24 24 VOLT HALOGEN |
| | MO MONORAIL | | | | -LEDS930 12 VOLT LED 90 CRI 3000K (T20/T24) |
| | | | | | -24 24 VOLT HALOGEN |

Note: MP includes 4" Round Flush Canopy. Note: MP includes 4 Round Flush Canopy. When installing LED option on MO2 only magnetic transformers may be used. Chrome not offered on Monorail & Two-Circuit Monorail.

700 _____ SLD _____

JOB NAME _____


NOTES _____



SOLITUDE PENDANT

SPECIFICATIONS

| | |
|-------------------------------|-------------|
| HARDWARE MATERIAL | Metal |
| SHADE MATERIAL | Glass |
| NET WEIGHT | 2.6 lbs |
| HEIGHT | 6in |
| WIDTH | 2.6in |
| LENGTH | 2.6in |
| UP LIGHT / DOWN LIGHT / BOTH? | |
| WET LISTED | |
| DAMP LISTED | |
| DRY LISTED | |
| MIN. HANGING HEIGHT | 6in |
| MAX HANGING HEIGHT | 78.5in |
| SLOPED CEILING ADAPTABLE? | Yes 45° Max |
| GENERAL LISTING | ETL Listed |
| INCLUDES | |

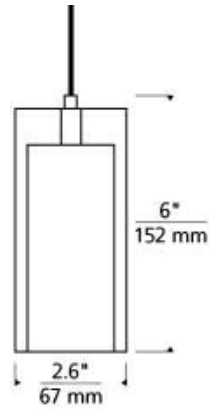

LAMPING SPECIFICATIONS

| | LED LAMP | INTEGRATED LED | NON LED | NO LAMP |
|-----------------------|-------------|----------------|-------------|---------|
| DELIVERED LUMENS | 330 | | 360 | |
| WATTS | 6 | | 35 | |
| MAX WATTAGE PER BULB | 35W | | 35W | |
| INPUT VOLTAGE | 12V 120V | | 12V 120V | |
| DIMMING TYPE* | ELV, MLV | | ELV, MLV | |
| CCT | 3000K | | 3000K | |
| CRI | 90 CRI | | 100 CRI | |
| LED LIFETIME | | | | |
| L70 | >30000 | | | |
| AVERAGE BULB HOURS | | | 2000 | |
| FIELD SERVICEABLE LED | | | | |
| LAMP BASE | GY 6.35 | | GY 6.35 | |
| LAMP SHAPE | T4 | | T4 | |
| LAMP INCLUDED? | Y | | Y | |
| WARRANTY** | 5 Years | | 1 Year | |

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

| | Integrated LED | Replacement LED Lamp | No Lamp * |
|--|----------------|----------------------|-----------|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6. | | Yes | |
| This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California. | | Yes | |

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

