

# Southhold Lantern

CC1003, CC1014, CC1024, CC1044 | 1.0

GENERATION LIGHTING

## Pendant


### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

**CAUTION - RISK OF FIRE**  
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
**Use minimum 90°C supply conductors.**

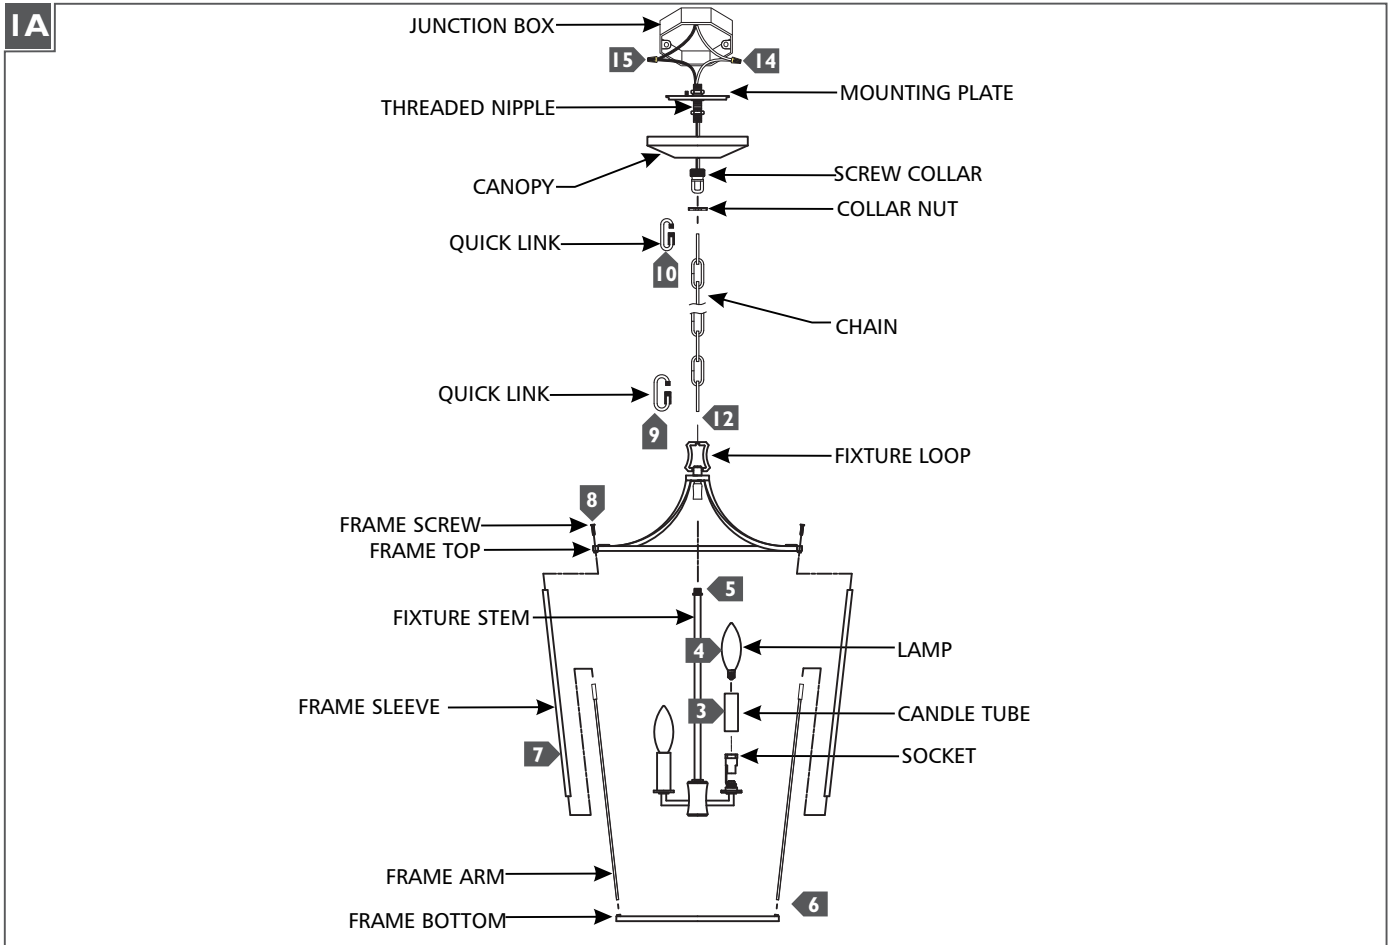

- 1** If necessary, screw the short end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
- 2** Secure the mounting plate to the junction box.
- 3** Install the candle tube by sliding it over the socket.
- 4** Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage information.
- 5** Feed the cord through the frame top and the fixture loop, then screw the fixture loop into the frame stem.
- 6** Screw the frame arms into the frame bottom, then place the sleeves over the frame arms.
- 7** Place the frame top on to the frame arms and secure in place with the frame screws.
- 8** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 9** Install a quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 10** Unscrew the collar nut from the screw collar, then install the collar nut, and the canopy onto the chain (in that order).
- 11** Install the other quick link onto the remaining end of the chain, then secure the quick link onto the screw collar.
- 12** Weave the cord through the chain, collar nut, canopy, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 13** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 14** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 15** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 16** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut onto the screw collar.

**SAVE THESE INSTRUCTIONS!**

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

**[www.generationlighting.com](http://www.generationlighting.com)**

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.