

The Ikon outdoor step light features a minimized rectangular aperture that aims illumination downward to light stairs with minimal glare. Ideal for wayfinding and added safety after dark. Available in two finishes, Black and Bronze.

- **Selectable CCT (2700K/3000K)**
- **120V or 12V**
- **Outstanding protection against the elements:**
  - Wet Listed IP66 Rated
  - Stainless Steel Mounting Hardware
  - Powder Coat Finishes

## SPECIFICATIONS

DELIVERED LUMENS	202 (2700K)
WATTS	12.2
VOLTAGE	12V (Transformer sold separately) or 120V
DIMMING	12V ELV, MLV and Triac. 120V not dimmable
LIGHT DISTRIBUTION	Symmetric
OPTICS	Not applicable
MOUNTING OPTIONS	Step: 2x4 junction box
CCT	2700K/3000K Selectable
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G1
DARK SKY	Compliant
WET LISTED	IP66
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	1 lb.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



IKON OUTDOOR WALL/STEP LIGHT  
shown in black



IKON OUTDOOR WALL/STEP LIGHT  
shown in bronze

## 12V AC TRANSFORMERS\*

(OUTDOOR RATED, ORDERED SEPARATELY)


ITEM	DESCRIPTION	HOUSING	DIMMING
<b>700OT150T</b>	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
<b>700OT300T</b>	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC

\*WE DO NOT RECOMMEND USING GREATER THAN 70% OF THE MAXIMUM WATTAGE SPECIFIED FOR THE LOW VOLTAGE TRANSFORMER DUE TO INRUSH CURRENT REQUIREMENTS.

## ORDERING INFORMATION

PRODUCT	CRI/CCT	FINISH	VOLTAGE
<b>700OSIKN</b>	<b>92730</b> 90 CRI 2700K/3000K SELECTABLE	<b>B</b> BLACK <b>Z</b> BRONZE	<b>12</b> 12V* <b>120</b> 120V

\*REQUIRES 12V REMOTE TRANSFORMER

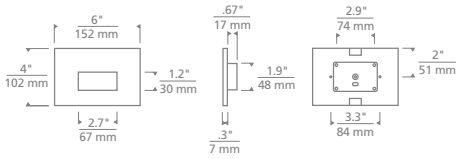

Ikon Outdoor Wall/Step Light

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES
