

PRODUCT FEATURES

- Ultra-thin, ultra-modern architectural style
- Edge-lit light guide technology
- Fully dimmable integrated LED lamp
- Available in modern finishes
- Ideal for bathroom and vanity lighting
- Protected by a 5-year warranty



LAMPING

Includes 45.2 watt, 1580.9 total delivered lumen, 3000K LED module. Dimmable with most LED compatible ELV dimmers. 277V compatible with 0-10V dimmer. Mounts horizontally or vertically.

Nightshade Black



Chrome

Nightshade Black

Plated Brass

Nightshade Black
Alt View

To view all available finish options, please visit techlighting.com

ORDERING INFORMATION

700BCSPAN SHAPE OR SIZE	LENGTH (A)	FINISH	LAMP
B DIRECT/INDIRECT	4 48"	C CHROME B NIGHTSHADE BLACK BR PLATED BRASS S SATIN NICKEL	-LED930 INTEGRATED LED 90 CRI 3000K 120V

700BCSPAN _____

JOB NAME _____


NOTES _____



SPAN 48 BATH

SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	Acrylic
NET WEIGHT	6 lbs
HEIGHT	5.5in
WIDTH	5.5in
LENGTH	46.8in
WET LISTED	
DAMP LISTED	
DRY LISTED	
GENERAL LISTING	ETL Listed
INCLUDES	

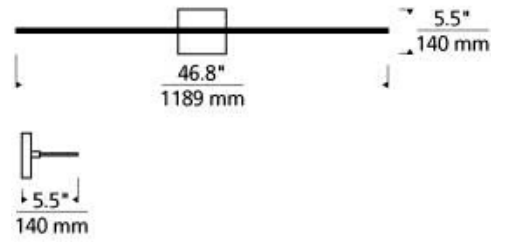

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		1581.0		
WATTS		45.2		
MAX WATTAGE PER BULB		45.2W		
INPUT VOLTAGE		120V		
DIMMING TYPE*		ELV, TRIAC		
CCT		3000K		
CRI		90 CRI		
LED LIFETIME				
L70		>50000		
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		Integrated LED		
LAMP INCLUDED?		True		
WARRANTY**		5 Years		

* Dimming information available at www.techlighting.com/Downloads#dimming
 ** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8 .	No		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.	N/A		

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

