

The modern, nearly flush Wend outdoor wall and step light features an attractive exposed acrylic diffuser. Light is aimed downward to light stairs or graze walls with minimal glare. Ideal for wayfinding and added safety after dark.

- **Selectable CCT (2700K/3000K)**
- **120V or 12V**
- **Outstanding protection against the elements:**
 - Wet Listed IP66 Rated
 - Stainless Steel Mounting Hardware
 - Powder Coat Finishes

SPECIFICATIONS

DELIVERED LUMENS	344 (2700K)
WATTS	12.1
VOLTAGE	12V (Transformer sold separately) or 120V
DIMMING	12V MLV. 120V not dimmable
LIGHT DISTRIBUTION	Symmetric
OPTICS	Not applicable
MOUNTING OPTIONS	Wall: 4" junction box with plaster plate Step: 2x4 junction box
CCT	2700K/3000K Selectable
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G1
DARK SKY	Compliant
WET LISTED	IP66
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	1 lb.

* Visit techlighting.com for specific warranty limitations and details.



WEND OUTDOOR WALL/STEP LIGHT
shown in black



WEND OUTDOOR WALL/STEP LIGHT
shown in bronze

12V AC TRANSFORMERS*

(OUTDOOR RATED, ORDERED SEPARATELY)


ITEM	DESCRIPTION	HOUSING	DIMMING
700OT150T	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
700OT300T	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC

*WE DO NOT RECOMMEND USING GREATER THAN 70% OF THE MAXIMUM WATTAGE SPECIFIED FOR THE LOW VOLTAGE TRANSFORMER DUE TO INRUSH CURRENT REQUIREMENTS.

ORDERING INFORMATION

PRODUCT	CRI/CCT	FINISH	VOLTAGE
7000SWEND	92730 90 CRI 2700K/3000K SELECTABLE	B BLACK Z BRONZE	12 12V* 120 120V

*REQUIRES 12V REMOTE TRANSFORMER

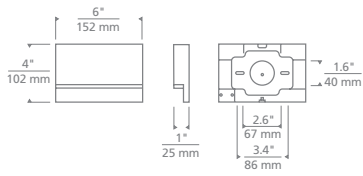

Wend Outdoor Wall/Step Light

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES
