

INSTALLATION INSTRUCTIONS

Model# 73166-66

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Prior to installation, remove the frame (G) from fixture assembly (D) by unscrewing the four ball nut screws (H), then un-screw the glass shade (F) from the socket base.

CONNECTING THE WIRES (Fig. 2)

4. Pull black, white, and ground wires out of post (A).
5. Connect electrical wires while supporting the lantern as shown in Fig. 2. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding. After wires are connected, tuck them carefully inside the post (A).

FINISHING THE INSTALLATION (Fig. 1)

6. Place fixture (D) over post (A) and secure with mounting screws (C).
7. Install (1) one medium base bulb (E) up to 60 Watts, or CFL or LED equivalent (not included), in accordance with the fixture specification. (DO NOT EXCEED THE MAXIMUM WATTAGE RATING) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)
8. Screw the glass shade (F) back onto the socket base. Lift the glass shade (F) with frame (G) over the fixture body (D) and secure with four ball nut screws (H).

Your installation is now complete. Return power to the outlet box and test the fixture.



Fig. 1


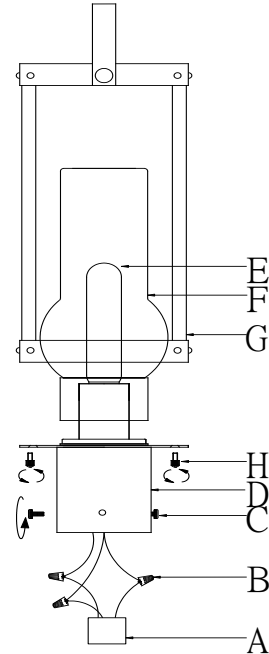


Fig.2

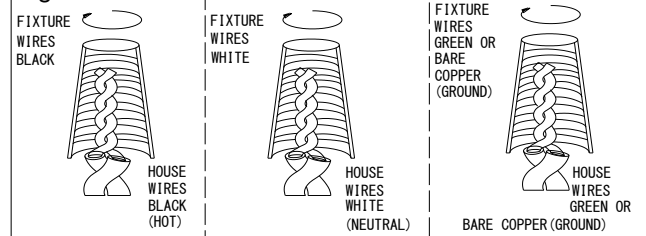

“CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”

ATTENTION - RISQUE D'INCENDIE. CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.