



## Basics 9271

project name:	
project location:	
specifier name:	
specifier location:	
quantity:	
fixture type:	


modifications:

**Base Specs**  
14"h x 7"w x 6"d

---

**Notes**  
Marine grade primer available — **±\$ Inquire.**

---

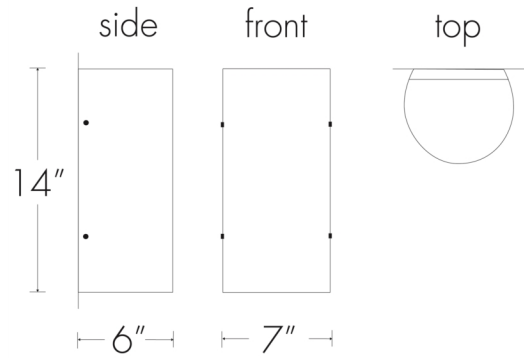



## Basics 9271

<table border="0"> <tr> <td style="background-color: #f2f2f2; padding: 5px;">standard finish:</td> <td style="background-color: #d9e1f2; width: 20px;"></td> <td style="background-color: #f2f2f2; padding: 5px;">premium finish:</td> </tr> <tr> <td>N/A</td> <td></td> <td>N/A</td> </tr> </table>	standard finish:		premium finish:	N/A		N/A	<table border="0"> <tr> <td style="background-color: #d9e1f2; padding: 5px;">lamping:</td> </tr> <tr> <td> <p><b>01:</b> Incandescent, 1 x E26 - 60W max ea, A-Type, 120V, Standard Phase Dimming, UL/cUL Wet</p> <p><b>02:</b> 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Wet</p> <p><b>03:</b> Incandescent, 1 x E26 - 60W max ea, A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> <p><b>04:</b> 14w Integrated LED, 2198 Initial Lumens, 3000K, 90 CRI, 120V-277V, 0-10V Dimming, UL/cUL Dry/Damp</p> <p><b>10:</b> Wattage Restriction Label - 1 x E26 for LED Retrofit 20W max ea - A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> <p><b>14:</b> 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> </td> </tr> </table>	lamping:	<p><b>01:</b> Incandescent, 1 x E26 - 60W max ea, A-Type, 120V, Standard Phase Dimming, UL/cUL Wet</p> <p><b>02:</b> 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Wet</p> <p><b>03:</b> Incandescent, 1 x E26 - 60W max ea, A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> <p><b>04:</b> 14w Integrated LED, 2198 Initial Lumens, 3000K, 90 CRI, 120V-277V, 0-10V Dimming, UL/cUL Dry/Damp</p> <p><b>10:</b> Wattage Restriction Label - 1 x E26 for LED Retrofit 20W max ea - A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> <p><b>14:</b> 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p>
standard finish:		premium finish:							
N/A		N/A							
lamping:									
<p><b>01:</b> Incandescent, 1 x E26 - 60W max ea, A-Type, 120V, Standard Phase Dimming, UL/cUL Wet</p> <p><b>02:</b> 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Wet</p> <p><b>03:</b> Incandescent, 1 x E26 - 60W max ea, A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> <p><b>04:</b> 14w Integrated LED, 2198 Initial Lumens, 3000K, 90 CRI, 120V-277V, 0-10V Dimming, UL/cUL Dry/Damp</p> <p><b>10:</b> Wattage Restriction Label - 1 x E26 for LED Retrofit 20W max ea - A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> <p><b>14:</b> 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p>									
<table border="0"> <tr> <td style="background-color: #f2f2f2; padding: 5px;">standard diffuser:</td> <td style="background-color: #d9e1f2; width: 20px;"></td> <td style="background-color: #f2f2f2; padding: 5px;">premium diffuser:</td> </tr> <tr> <td>OA - Opal Acrylic</td> <td></td> <td>           CO - Caramel Onyx            FA - Faux Alabaster            TS - Tea Stained            WS - White Swirl         </td> </tr> </table>	standard diffuser:		premium diffuser:	OA - Opal Acrylic		CO - Caramel Onyx FA - Faux Alabaster TS - Tea Stained WS - White Swirl			
standard diffuser:		premium diffuser:							
OA - Opal Acrylic		CO - Caramel Onyx FA - Faux Alabaster TS - Tea Stained WS - White Swirl							

