

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Vida

### Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-72718 18"	3000K 90	33.5W	2450	1755	AL Brushed Aluminum BK Black WT White

Example: **PD-72718-AL**

#### DESCRIPTION

A cleverly executed open metal shade that illuminated when suspended without revealing hidden light sources. A frosted acrylic diffuser conceals the high powered LEDs within the brushed aluminum spun metal shade, preserving an open to the ceiling mystique. Vida is suspended on three thin low profile cables without the need for an additional power cord, lending to a simple and minimalistic design. Adjustable to lengths of 134" through a push-pin locking mechanism at the canopy.

#### FEATURES


- Frosted polycarbonate diffuser conceals LEDs within the shade, preserving an open to the ceiling mystique
- Cable suspension carrying low voltage may be field shortened
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy
- 5 year warranty

#### SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%
Rated Life:	82000 Hours
Standards:	ETL, cETL, Title 24: Damp Location Listed
Construction:	Aluminum with acrylic diffuser



#### FINISHES

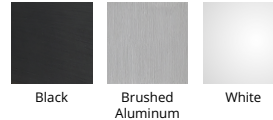

#### LINE DRAWING

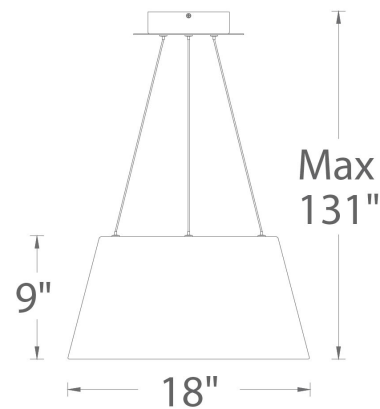

PD-72718

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Vida

### Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-72724 24"	3000K 90	43W	3235	2385	AL Brushed Aluminum BK Black WT White

Example: **PD-72724-AL**

#### DESCRIPTION

A cleverly executed open metal shade that illuminated when suspended without revealing hidden light sources. A frosted acrylic diffuser conceals the high powered LEDs within the brushed aluminum spun metal shade, preserving an open to the ceiling mystique. Vida is suspended on three thin low profile cables without the need for an additional power cord, lending to a simple and minimalistic design. Adjustable to lengths of 134" through a push-pin locking mechanism at the canopy.

#### FEATURES


- Frosted polycarbonate diffuser conceals LEDs within the shade, preserving an open to the ceiling mystique
- Cable suspension carrying low voltage may be field shortened
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy
- 5 year warranty

#### SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%
Rated Life:	82000 Hours
Standards:	ETL, cETL, Title 24: Damp Location Listed
Construction:	Aluminum with acrylic diffuser



#### FINISHES

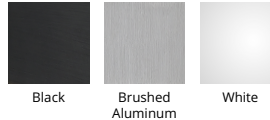

#### LINE DRAWING

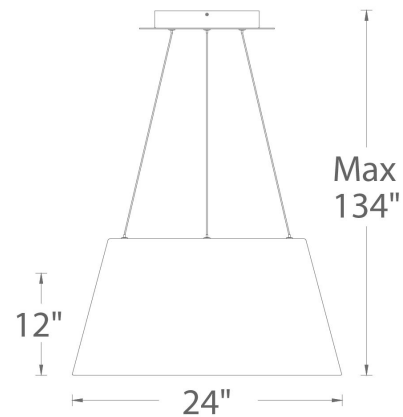

PD-72724