

ESFERA X-LARGE SCONCE

VISUAL COMFORT & CO.

PRODUCT FEATURES



LAMPING

Includes 24.3 watt, 672 delivered lumens, 2700K LED module.
Dimmable with most LED compatible ELV, TRIAC and 0-10V dimmers.
Mounts vertically or horizontally. 120V-277V.

Crystal/Nightshade Black



Crystal/Nightshade Black Crystal/Nightshade Black Alt View Crystal/Polished Nickel Crystal/Polished Nickel Alt View

To view all available finish options, please visit techlighting.com

ORDERING INFORMATION

KWWS102	COLOR TEMP	COLOR	FINISH
	27 2700K	C CRYSTAL	NB NATURAL BRASS B NIGHTSHADE BLACK N POLISHED NICKEL

KWWS102 _____

JOB NAME _____

NOTES _____




ESFERA X-LARGE SCONCE

VISUAL COMFORT & Co.

SPECIFICATIONS

PRIMARY MATERIAL	Aluminum or Brass
SHADE MATERIAL	Crystal
NET WEIGHT	14.5 lbs
HEIGHT	29.5in
WIDTH	3.2in
LENGTH	4.5in
MIN. EXTENSION FROM WALL	3.2in
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	
DRY LISTED	
UP / DOWN	
HORIZONTAL / VERTICAL	
WALL / CEILING MOUNT	
GENERAL LISTING	ETL Listed
ADA COMPLIANT	
INCLUDES	

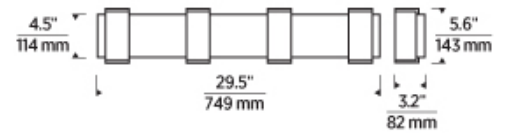

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		672		
WATTS		24.3		
MAX WATTAGE PER BULB		24.3W		
		Universal 120V-277V 0-10, ELV, TRIAC		
CCT		2700K		
CRI		90 CRI		
LED LIFETIME		>50000		
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		Integrated LED		
LAMP INCLUDED?		True		
WARRANTY**		5 Years		

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8.	No		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

