

Hilo 16 Flush Mount

700FMHLO16_ 1.0

VISUAL COMFORT & CO.

MODERN COLLECTION

GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.

This product can be dimmed with most ELV, TRIAC, or 0-10V dimmers.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

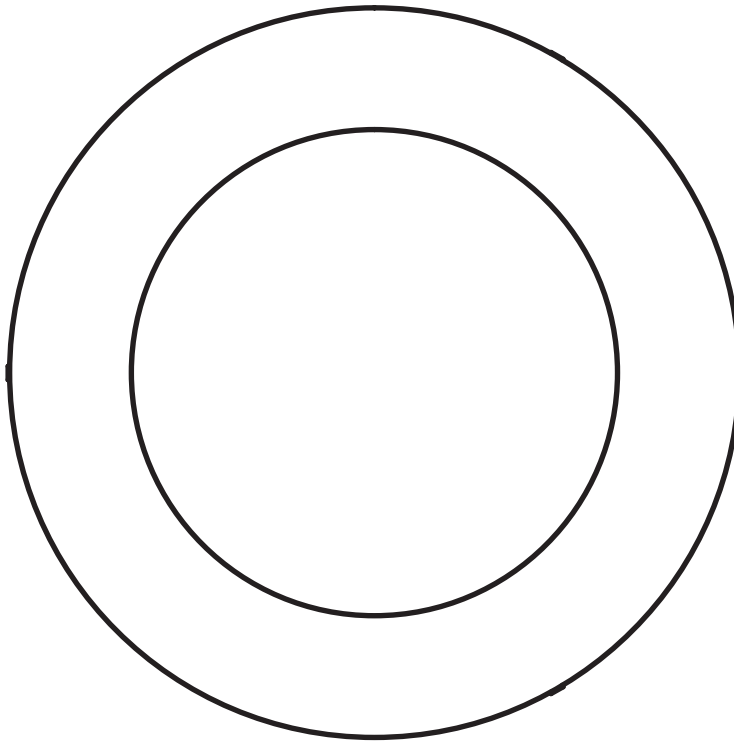

VISUAL COMFORT & CO.


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

www.visualcomfort.com

Install the Fixture

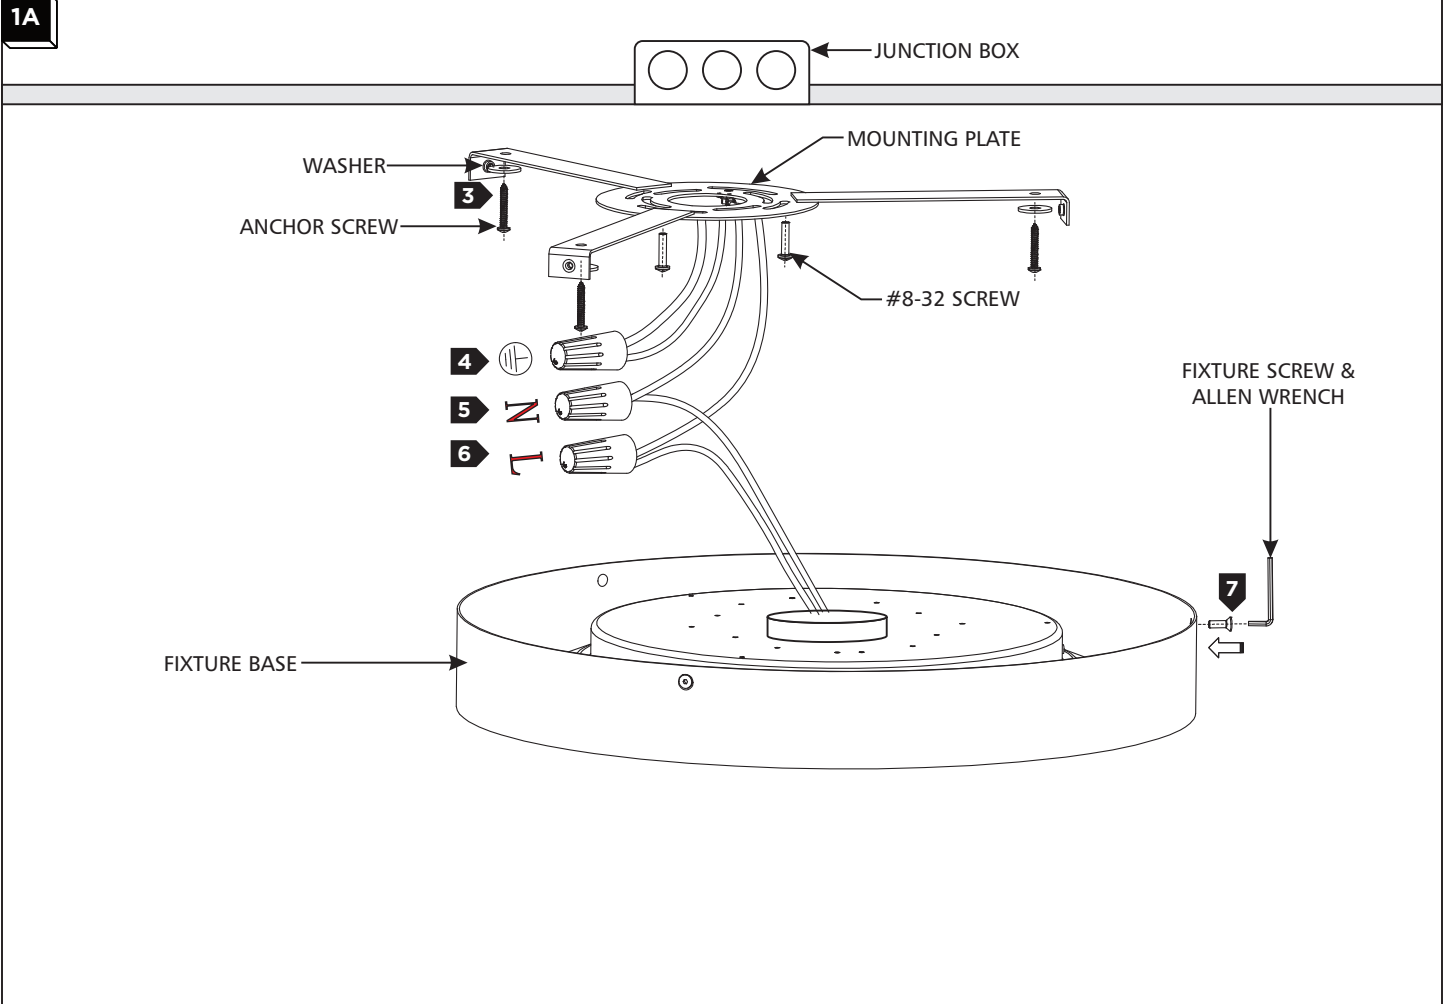

- 1 Separate the mounting plate from the fixture by removing the fixture screws with the provided Allen wrench.
- 2 Secure the mounting plate to the junction box with #8-32 screws.
- 3 Drill appropriate sized holes through the holes on the mounting plate. Screw the anchor screws with washers into the holes to fully secure the mounting plate.
- 4 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5 Connect the white fixture wire to the neutral power line with a wire nut.
- 6 Connect the black fixture wire to the hot power line with a wire nut.
- 7 Properly place the wires and wire nut connections into the junction box, then install the fixture assembly onto the mounting plate with the fixture screws using the provided Allen wrench.

 **TECH LIGHTING**

7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.techlighting.com