

PERLE 36 PENDANT

VISUAL COMFORT & CO.

PRODUCT FEATURES

- Hand-blown glass manufactured in Italy
- This item is made of natural brass. It is a living finish that will patina and warm with age which adds richness. If it gets an uneven patina or spots, a brass cleaner can restore the finish
- Remote and surface mount driver options available. An optional mud-in canopy kit can be ordered separately in conjunction with the 'Remote' driver option for the most minimal ceiling appearance
- Contact factory for custom configurations
- For minimal ceiling appearance, order the optional mud-in canopy kit in conjunction with the 'Remote' driver. It can be viewed here. techlighting.com/Products/Fixtures/Accessories/Collier-Mud-in-Plate
- The LED Driver is housed within the junction box. (L. 2.68" | W. 1.57" | H. 0.87")



Natural Brass

LAMPING

Includes 16.8 watt, 606 total delivered lumens, 90 CRI 2700K or 3000K LED modules. Remote dimmable with most LED compatible ELV and TRIAC dimmers. 277V dimmable with 0-10V dimmers. Surface dimmable with ELV, TRIAC and 0-10V dimmers. Remote 120V or 277V. Surface 120V-277V. Can be installed on a sloped ceiling up to 45°.



Natural Brass



Polished Nickel



Dark Bronze

ORDERING INFORMATION

SLPD229	COLOR TEMP	FINISH	LAMP
	27 2700K	BZ DARK BRONZE	R REMOTE
	30 3000K	NB NATURAL BRASS	R-277 REMOTE 277V
		N POLISHED NICKEL	S SURFACE

SLPD229 _____

JOB NAME _____

NOTES _____




PERLE 36 PENDANT

VISUAL COMFORT & CO.

SPECIFICATIONS

PRIMARY MATERIAL	Glass
SHADE MATERIAL	Glass
NET WEIGHT	10 lbs
HEIGHT	38.9in
WIDTH	2.8in
LENGTH	2.8in
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	
DRY LISTED	
MIN. HANGING HEIGHT	38.9in
MAX HANGING HEIGHT	41.9in
TOTAL CORD LENGTH	
TOTAL STEM LENGTH	
STEM QTY	
SLOPED CEILING ADAPTABLE?	Yes 45° Max
GENERAL LISTING	ETL Listed
INCLUDES	

REMOTE CANOPY/SURFACE CANOPY/MUD PLATE

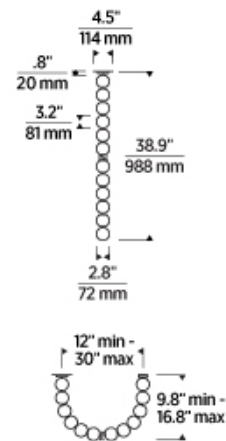

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		606		
WATTS		16.8		
MAX WATTAGE PER BULB		16.8W		
		120V ELV, TRIAC 277V 0-10V Universal 120V-277V 0-10, ELV, TRIAC		
CCT		2700K 3000K		
CRI		90 CRI		
LED LIFETIME				
L70		>50000		
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		Integrated LED		
LAMP INCLUDED?		True		
WARRANTY**		5 Years		

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8.	Yes		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

