

## PRODUCT FEATURES

### LAMPING

Includes 48.5 watt, 1364 delivered lumens, 2700K LED module.  
Dimmable with most LED compatible ELV, TRIAC dimmers. Mounts horizontally or vertically. 120V.



White Linen/Nightshade Black



White Linen/Nightshade Black



White Linen/Natural Brass



White Linen/Nightshade Black Alt View



White Linen/Natural Brass Alt View

## ORDERING INFORMATION

CDWS113	COLOR TEMP	COLOR	FINISH
	27 2700K	W WHITE LINEN	NB NATURAL BRASS B NIGHTSHADE BLACK

CDWS113 \_\_\_\_\_

JOB NAME \_\_\_\_\_

NOTES \_\_\_\_\_




# ZIG ZAG GRANDE SCONCE

VISUAL COMFORT & Co.

## SPECIFICATIONS

PRIMARY MATERIAL	Steel Or Brass
SHADE MATERIAL	White Linen
NET WEIGHT	11 lbs
HEIGHT	48.2in
WIDTH	4.2in
LENGTH	4.1in
MIN. EXTENSION FROM WALL	4.2in
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	
DRY LISTED	
UP / DOWN	
HORIZONTAL / VERTICAL	
WALL / CEILING MOUNT	
GENERAL LISTING	ETL Listed
ADA COMPLIANT	
INCLUDES	

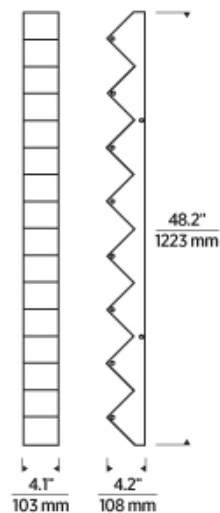

## LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		1364		
WATTS		48.5		
MAX WATTAGE PER BULB		48.5W		
		120V ELV, TRIAC		
CCT		2700K		
CRI		90 CRI		
LED LIFETIME				
L70		>50000		
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		Integrated LED		
LAMP INCLUDED?		True		
WARRANTY**		5 Years		

\* Dimming information available at [www.techlighting.com/Downloads#dimming](http://www.techlighting.com/Downloads#dimming)

\*\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

## T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8.	Yes		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

\* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

