


ASSEMBLY INSTRUCTIONS

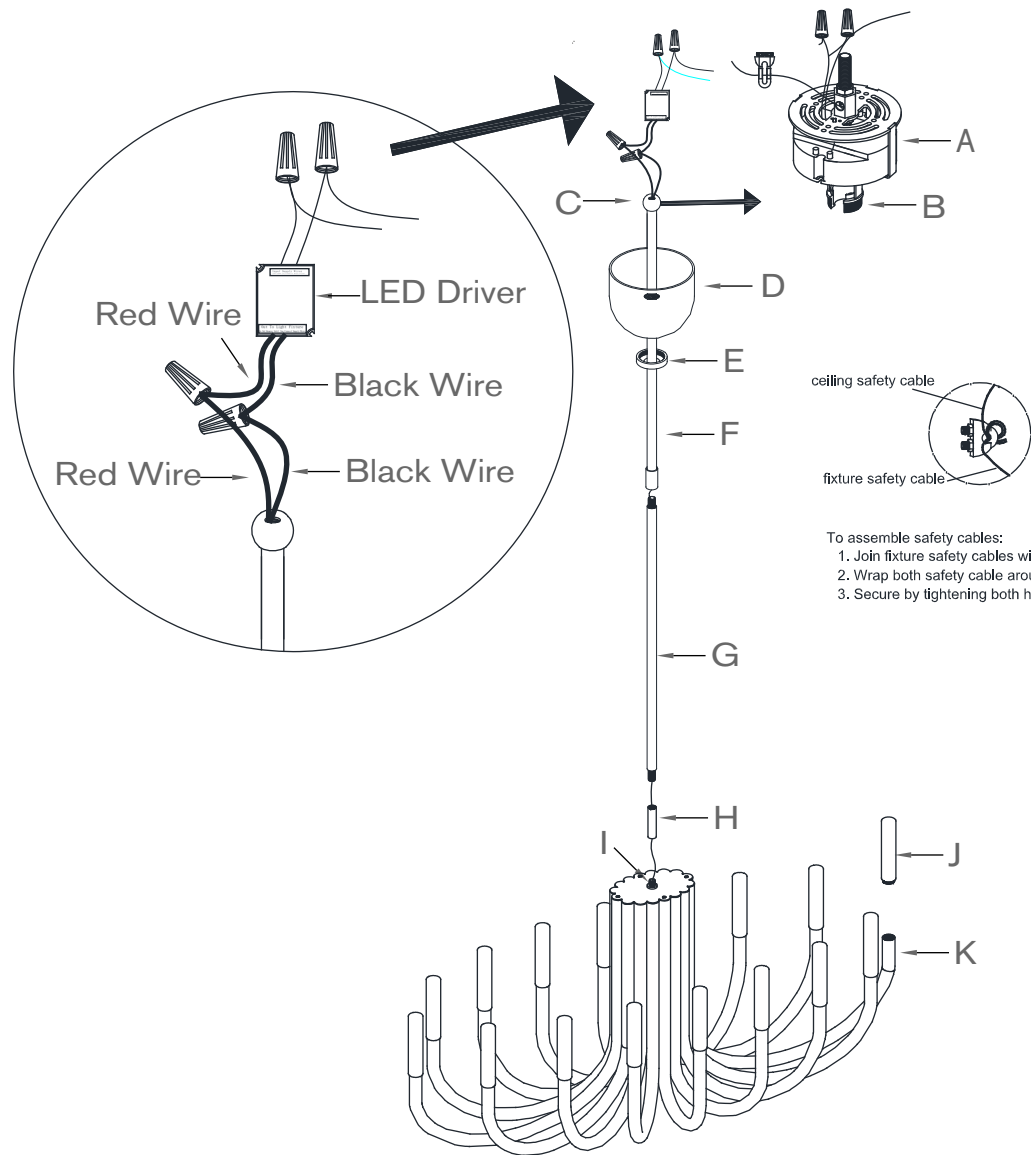

Rousseau Large Oval Chandelier Item # KW 5585

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

- Carefully remove all parts from the carton.
- Provide a 1/4" IPS pipe with one end securely mounted to beam or a structural. The other end should protrude through the enter of the outlet box.
- Insert top threaded nipple on mounting plate (A) in mounting 1/4 IPS pipe.
- Feed wire through the rod (H), (G), (F), ring (E), canopy (D) and swivel ball (C).
- Thread connection rod (H) onto the joint (I).
- Thread the bottom nipple of rod (G) into the rod (H).
- Thread the top nipple of rod (G) into the bottom opening of rod (F).
- Slide canopy ring (E) and canopy (D) on rod (F).
- Measure the wires and cut it to desired length. Be certain to enough for connecting to LED driver input supply wire.
- Hook the swivel ball (C) to mounting loop (B) for hanging the light fixture.
- Attach fixture steel safety cable to structural member in the ceiling. (Refer to the illustration)
- Pull the ground wire from ceiling outlet through the center hole of mounting plate (A), wrap the ground wire onto the green ground screw on mounting plate (A) and secure tight. **IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.**
- Connect the **LED driver** input supply wire Neutral wire (white) with the neutral wire from the outlet box using a wire nut. Connect the Hot (black) wire with the hot wire from the outlet box using a wire nut.
- Connect the **LED driver** output supply wire to the wires from the fixture body using a wire nut, please note red wire (+) to red wire, and black wire (-) to black wire. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
- Tuck the wire connections neatly into the ceiling outlet box.
- Slip canopy (D) to mounting plate (A) and secure with canopy ring (E).
- Thread glass rod (J) into top of lamp body (K) by turning in a clockwise direction until tight. **DO NOT OVERTIGHT, OTHERWISE THE GLASS ROD WILL BREAK.**
- Restore power and test fixture. Installation is complete.

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.