

Dresden 4-Light Medium and Large Lantern

TFC1004, TFC1014 | 1.0

GENERATION LIGHTING
PENDANT

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.


SAVE THESE INSTRUCTIONS!

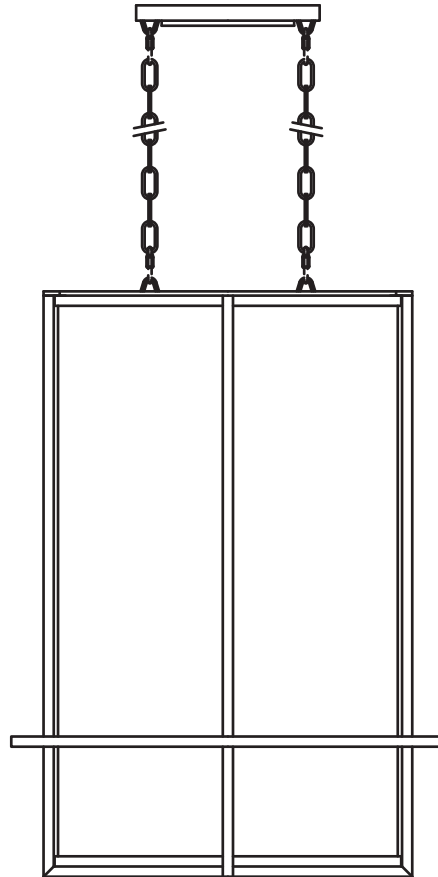

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

1A

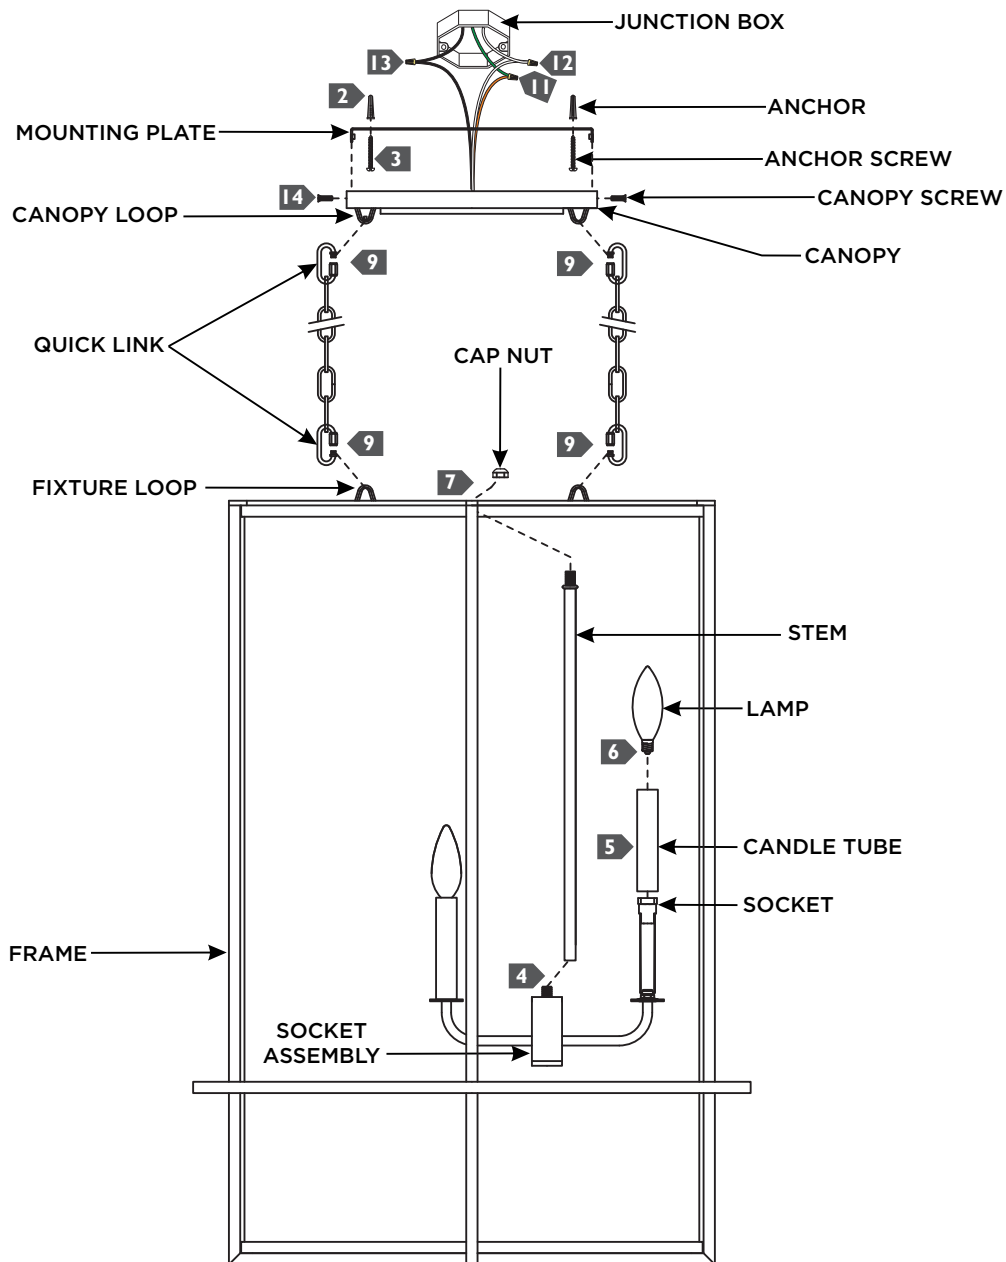

- 1** Place the mounting plate against the ceiling mounting location and mark the anchor locations through the holes on the mounting plate. Remove the mounting plate from the ceiling.
- 2** Drill appropriate sized holes at the marked locations and install the anchors.
- 3** Secure the mounting plate to the ceiling by screwing the anchor screws through the anchors.
- 4** Feed the fixture wires through stem then screw it onto the socket assembly.
- 5** Install the candle tubes by sliding one over each socket.
- 6** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.
- 7** Feed the fixture wires through top hole on the frame, place the stem through the frame hole, and secure the assembly in place with the cap nut.
- 8** Determine the wanted height of the fixture and remove a portion of each chain from the bottom by opening a link with pliers.
- 9** Install a quick link to each end of a chain, then secure each end onto the fixture and canopy loop. Repeat for other side.
- 10** Weave the cord through the chain, canopy loop, and canopy. Trim the cord leaving enough to make electrical connections. Assistance may be needed for the following steps.
- 11** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 12** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 13** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 14** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place with the provided canopy screws.