

R2RPT, R2SPT

2" Volta - Pinhole Trim

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Volta LED downlight series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications.

FEATURES

- Center beam alignment retained throughout adjustment range
- 0-30° vertical and 365° horizontal lockable hot aiming
- Indexed vertical scaling for precise and accurate alignment
- Integral patterned tempered trim lens included standard
- Compatible with a wide range of accessories
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast self-flanged aluminum construction

Input: Universal 120 - 277V AC 50/60 Hz

Dimming: Electronic Low Voltage (ELV): 100%-5%
0-10V: 100-0%
Lutron Hi-Lume 1% Ecosystem Fade-to-Black option

Light Source: High output 3-step Mac Adam Ellipse COB
Rated life of 50,000 hours at L70

Mounting: Heavy gauge retention clips support trim firmly. Safety cabling standard.
Ceiling cut out Round Trimmed: Ø 3 3/16" Invisible Trim: Ø 4 1/4"
Ceiling cut out Square Trimmed: 3 3/16" x 3 3/16" Invisible Trim: 4 1/4" x 4 1/4"
Accommodates 1/2" - 1 1/2" ceiling thickness

Finish: Electrostatically powder coated White, Black. Enamel coated Haze. Plated and brushed Copper Bronze.

Standards: ETL & cETL Wet location Listed

Model	Beam	Lumens		Color Temp	CRI	Finishes	Reflector/Trim
		Reference	Output*				
<p>R2RPT Round Trim R2SPT Square Trim</p>	S 12°	Round	235	3380	827 2700K 85	BK Black/Black CB Black/Copper Bronze HZ Black/Haze WT Black/White	
		Square	285	4780	830 3000K 85 835 3500K 85 840 4000K 85		
	N 20°	Round	555	4805	927 2700K 90		
		Square	720	5340	930 3000K 90		

R2_PT-_____ - _____

Example: **R2RPT-N930-WT**

*Reference output shows **830**(85CRI 3000K) trim with **22** housing. Use multiplier table below to determine the output for other combinations.

Multiplier	TRIM					
	827	927	830	930	835	840
HOUSING 22	0.95	0.81	1.00	0.86	1.05	1.07
HOUSING 15	0.66	0.56	0.69	0.59	0.72	0.74

Example: **R2SPT-N840-WT** with **15** housing: 720 lm (Reference Output) x 0.74 (Multiplier) = 533 lm

5340 CBCP (Reference Output) x 0.74 (Multiplier) = 3952 CBCP

Please see next page for housing units(required)

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

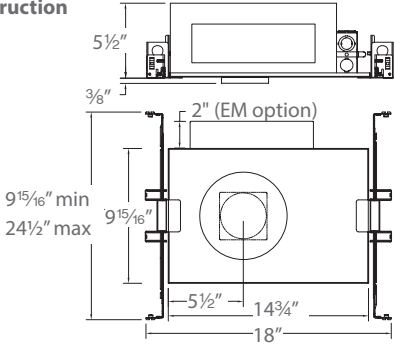

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

R2RPT, R2SPT

2" Volta - Pinhole Trim

WAC LIGHTING

Responsible Lighting®

HOUSING (Required)	Model	Trim	Power	Driver	Emergency Backup
New Construction Airtight IC 	R2RN <i>Round</i> R2RC <i>Round Chicago Plenum</i> R2SN <i>Square</i> R2SC <i>Square Chicago Plenum</i>	T Trim L Invisible Trim	15 15W IC 22 22W IC	DEFAULT L1 ELV, 0-10V Lutron Hi-Lume 1%	EM Optional
Remodel Non-IC 	R2BR	T Trim	15 15W Non-IC 22 22W Non-IC	DEFAULT ELV, 0-10V	N/A

R2 _____ - _____

Example: **R2RNT-15** or **R2RNT-15EM** (with Emergency backup battery)

WOOD AND METAL CEILING ADAPTERS

Round

R2R-ADP1 1/2" to 1" ceiling thickness

R2R-ADP2 1" to 1 1/2" ceiling thickness

Square

R2S-ADP1 1/2" to 1" ceiling thickness

R2S-ADP2 1" to 1 1/2" ceiling thickness

FIELD CHANGEABLE GLARE CONTROL AND OPTIC SYSTEM

Accessory holder
 Holds up to two lenses or one lens and one glare control

Optical cartridge
 Allows tool-less exchange of reflectors



Trim

Honeycomb Louver

Color Lens

Reflector

For narrow flood, flood, and wide flood (Spot distribution features dedicated module)

Light engine

ACCESSORY HOLDER sold separately

LENS-16-HLD Required for use with any lens or accessory

GLARE CONTROL ACCESSORIES

LENS-16 **HCM** Honeycomb Louver
CRL Cross Louver

INTERCHANGEABLE REFLECTORS

REF-R2-N Narrow Flood beam
REF-R2-F Flood beam
REF-R2-W Wide beam

LENS ACCESSORIES

LENS-16 **AMB** Amber
RED Red
FR Frosted
SPR Spread
BEL Beam Elongating

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760