

R2FRA1L-WD

FQ 2" Shallow - Round Adjustable Trimless (Dim-To-Warm)

WAC



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

The FQ Recessed series offers a complete line of high performance LED luminaires that provide outstanding functionality and quality. The series features superlative glare control with 30° shielding, 35° vertical tilting and 360° horizontal rotation, and uniform floor-to-ceiling wall washing. Multiple power level options and a full line of round and square, trimmed and trimless luminaires offer versatile solutions for various lighting applications. Easy to order, install, and service.

FEATURES

- Two-piece die-cast construction, compact size suitable for shallow ceiling plenum
- Light engine mounted on trim with springs for easy replacement
- 0-35° vertical tilting and 365° horizontal rotation
- Center beam alignment retained throughout adjustment range
- Field changeable beam angle with reflectors provided
- Accepts one Lens or glare control accessory
- 5 year WAC Lighting product warranty

SPECIFICATIONS

- Construction:** Durable die-cast aluminum construction
- Input:** Universal 120-277V AC 50/60 Hz
- Dimming:** Electronic Low Voltage (ELV): 100%-1%
TRIAC: 100%-1%
0-10V: 100-1%
- Light Source:** High output 3-step Mac Adam Ellipse COB
Rated life of 50,000 hours at L70
- Mounting:** Heavy gauge retention clips support trim firmly.
Safety cabling standard. Ceiling cutout: Ø 3 1/2"
Accommodates 1/2" - 1" ceiling thickness
- Finish:** Electrostatically powder coated White, Black, Dark Bronze. Enamel coated Haze.
- Standards:** ETL & cETL Damp Location Listed,
Title 24 JA8-2019 Compliant.

	Model	Beam	Lumens	CBCP	Color Temp	CRI	Finishes	Reflector/Trim
	R2FRA1L Round Trimless	F 40°	855	1560	WD 3000K-1800K	90	BK DB HZ WT	Black
		W 55°	845	1155				Dark Bronze
								Haze
								White

R2FRA1L-WD-__



Example: **R2FRA1L-WD-BK** (Beam F-40° reflector is pre-installed. Beam W-55° reflector is included.)

Please see next page for housing units (required)

R2FRA1L-WD

FQ 2" Shallow - Round Adjustable Trimless (Dim-To-Warm)

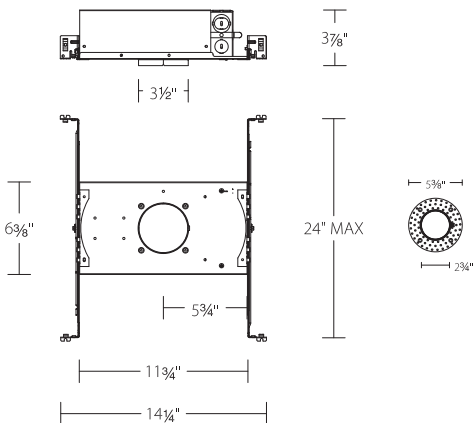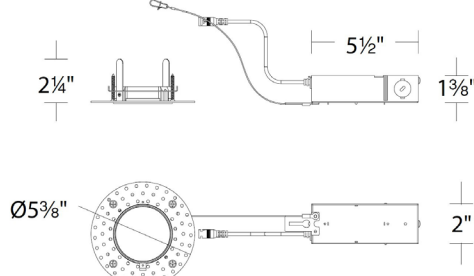

<i>HOUSING (Required)</i>		<i>Model</i>	<i>Power</i>
New Construction IC Airtight		R2FRN1L	1 <i>15W IC</i>
Remodel Non-IC		R2FRRL	1 <i>15W Non-IC</i>

R2FR__ - __

Example: **R2FRN1L-1**

GLARE CONTROL ACCESSORIES

LENS-11-HCM LENS-11P-CRL-BK	<i>Honeycomb Louver</i> <i>Cross Louver</i>
--	--

LENS ACCESSORIES

LENS-11	AMB RED BLU GRN SPR BEL	<i>Amber</i> <i>Red</i> <i>Blue</i> <i>Green</i> <i>Spread</i> <i>Beam Elongating</i>
----------------	--	--