

# 120/277VAC, 350MA (9-23VDC)

## Dimmable Remote Power Supply

# WAC



Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### FINISHES



Black

Model & Product

L x W x H

**PS-0350A-UR1**

8 7/8" X 2" X 1 1/2"


### PRODUCT DESCRIPTION

This class 2, UL & cUL listed enclosed electronic power supply is the perfect solution for wiring low voltage fixtures. Class 2 power supply is intrinsically safer because it is considered safety from a fire initiation standpoint and provides acceptable protection from electric shock. Enclosure cover is easy to remove. Power supply has knockouts for line voltage wiring. Secondary wiring for class 2 power supply do not require conduit sheathed cable or clamp wiring techniques. May be dimmed using a Phase cut (TRIAC/ELV) or 0-10V dimmer.

### FEATURES

- Universal Input 120-277VAC
- $\geq 0.9$  pf
- Overload and short circuit protection
- TRIAC/ELV/0-10V Dimming Control
- Class 2 Output
- 5 Year warranty

### LINE DRAWING

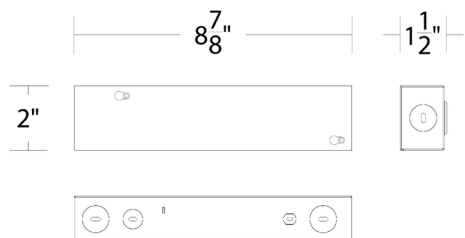

### SPECIFICATIONS

**Input:** 120-277VAC

**Output:** 350mA, 9-23VDC

**Dimming:** TRIAC/ELV/0-10V: 100-1%  
0-10V Minimum Current Source: 25uA  
0-10V Maximum Current Sink: 400uA

**Rated Life:** 50,000 hours

**Mounting:** Can be mounted on ceiling or wall in all orientations

**Operating Temp:** -4°F to 104°F (-20°C to 40°C)

**Standards:** UL & cUL listed, Damp Location listed, Title 24 Compliant

waclighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760