


# STEALTH SILO – MR-2007

## Remote Driver Monopoint Luminaire

# WAC




Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

ADJUSTABLE 15° - 50°

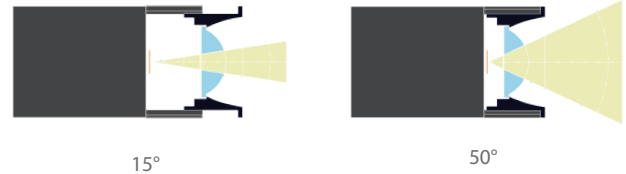

### PRODUCT DESCRIPTION

Silo offers superior light output with a wide range of dynamic beam adjustment in a small, sleek design. Engineered synthesis of driver, single point source LED, optical and thermal management in a slender die-cast housing. Ideal for residential, retail and lower mounting height commercial applications.

### FEATURES

- Construction: Die-cast aluminum with rotatable front face
- Continuously adjustable beam angle between 15° - 50°
- Stealth armature with 360° horizontal rotation and 90° vertical aiming
- Accommodates one glare control accessory
- Ceiling and wall mountable
- Remote power supply required (sold separately)
- 5 year warranty

### SPECIFICATIONS

<b>Input:</b>	350mA 18V DC
<b>Power:</b>	6.5W
<b>Light Source:</b>	High output COB LED
<b>Dimming:</b>	Reference remote power supply specifications
<b>Finish:</b>	Electrostatically Powder Coated Black, White
<b>Rated Life:</b>	50,000 hours
<b>Mounting:</b>	Ceiling thickness of 1/2" - 1 1/2", Cut out of 1 3/4"
<b>Standards:</b>	ETL & cETL Damp Location listed, Title 24 JA8 Compliant

System	Model	CRI	Color Temp	Beam	Lumens	CBCP	Finish
MR Monopoint	2007	90	927 2700K	15°	155	1850	BK Black WT White
				50°	460	855	
			930 3000K	15°	160	1945	
				50°	485	900	
			935 3500K	15°	170	2045	
				50°	510	945	
			940 4000K	15°	175	2085	
				50°	520	960	

**MR-2007-\_\_\_\_\_ - \_\_\_\_\_**  
 Example: MR-2007-930-BK

Accommodates one glare control accessory. Holder required sold separately.

### ACCESSORY HOLDER

Black	<b>LENS-S211-HLD-BK</b>
White	<b>LENS-S211-HLD-WT</b>

### GLARE CONTROL ACCESSORIES

Cross Louver	<b>LENS-11P-CRL-BK</b> <b>LENS-11P-CRL-WT</b>
Snoot	<b>LENS-11-SNOOT-BK</b> <b>LENS-11-SNOOT-WT</b>
Honeycomb	<b>LENS-11-HCM</b>

### EXTENSIONS *Custom order as a complete unit. Ceiling mount only.*

<b>X6</b> 6" <b>X12</b> 12" <b>X18</b> 18" <b>X24</b> 24" <b>X36</b> 36" <b>X48</b> 48"	<b>MR2007</b>	<b>BK</b> <b>WT</b>	
--	---------------	------------------------	--

Example: X12-MR2007930WT

wacighting.com  
 Phone (800) 526.2588  
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
 44 Harbor Park Drive  
 Port Washington, NY 11050

Central Distribution Center  
 1600 Distribution Ct  
 Lithia Springs, GA 30122



Western Distribution Center  
 1750 Archibald Avenue  
 Ontario, CA 91761

# STEALTH SILO – MR-2007

## Remote Driver Monopoint Luminaire



### REMOTE POWER SUPPLY

		Model	Input	Output	Dimmable	L	W	H
	<b>PS</b> Power Supply	<b>0350A-UR1</b>	120V-277V	1 Channel, UL Class 2	100%-1% ELV, TRIAC, 0-10V	8¾"	2"	1½"
	<b>PS</b> Power Supply	<b>0350A-UR6</b>	120V-277V	6 Channel, UL Class 2	100%-1% ELV, TRIAC, 0-10V	10¾"	3¾"	1¼"

Example: **PS-0350A-UR6**

Home-run wiring. Recommended maximum distance between power supply and compatible light fixture is shown in below table:

	18 AWG	16 AWG	14 AWG	12 AWG
Maximum distance between power supply and light fixture	100 ft	150 ft	200 ft	250 ft

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91761