



Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



## Zelda

PD-56729

**PRODUCT DESCRIPTION**

Inspired by ocean ripples, the Zelda Pendant by Modern Forms brings a fluid, yet soothing ambiance to your interior decor. Its ringed body, made of Die Cast Aluminum, is artisan-sculpted to resemble gently flowing water which appears to run around the fixture in constant motion. An Opal glass diffuser sits flush at the base of the ring, providing a soft, low-profile light courtesy of an integrated LED source.

**FEATURES**


- 277V option available for special order.
- ACLED driverless technology
- Downward illumination

**SPECIFICATIONS**

Rated Life	54000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120 VAC, 50/60Hz
Dimming	ELV
Color Temp	3000K
CRI	90
Construction	Die-cast aluminum

**REPLACEMENT PARTS**

RPL-GLA-56729-01 - Glass

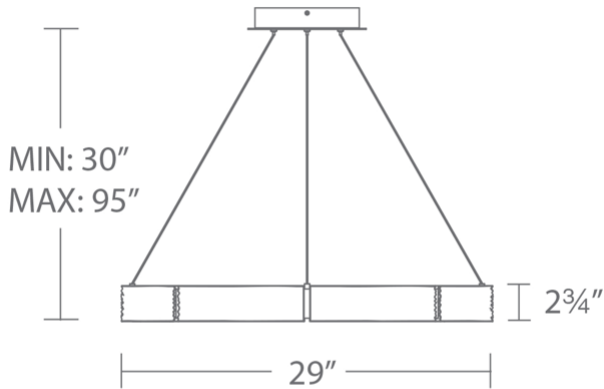

PD-56729

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-56729 29"	3000K	PN Polished Nickel	48.6W	2388	1236

Example: **PD-56729-PN**

•For 277V special order, add an "F" before the finish: PD-56729F-PN

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)



Project:

Location:

Fixture Type:

Catalog Number:

#### AVAILABLE FINISHES:



## Zelda

PD-56748

#### PRODUCT DESCRIPTION

Inspired by ocean ripples, the Zelda Pendant by Modern Forms brings a fluid, yet soothing ambiance to your interior decor. Its ringed body, made of Die Cast Aluminum, is artisan-sculpted to resemble gently flowing water which appears to run around the fixture in constant motion. An Opal glass diffuser sits flush at the base of the ring, providing a soft, low-profile light courtesy of an integrated LED source.

#### FEATURES


- 277V option available for special order.
- ACLED driverless technology
- Downward illumination
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 48" format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs. or supported independently of the outlet box

#### SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120 VAC, 50/60Hz
Dimming	ELV
Color Temp	3000K
CRI	90
Construction	Die-cast aluminum

#### REPLACEMENT PARTS

RPL-GLA-56748-01 - Glass

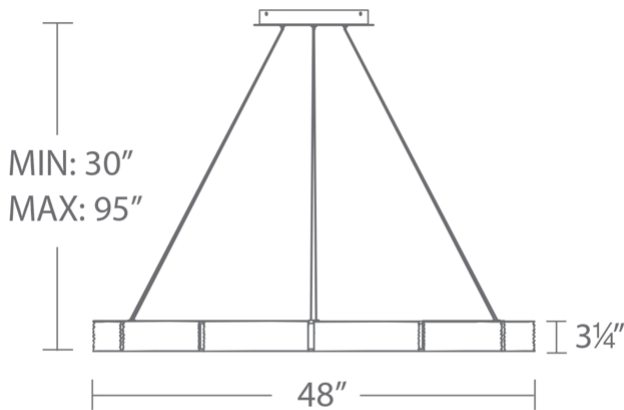

PD-56748

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-56748 48"	3000K	PN Polished Nickel	145W	3582	3060

Example: **PD-56748-PN**

•For 277V special order, add an "F" before the finish: PD-56748F-PN

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)