

Exhibiting Tech Lighting's refined and unadorned minimalist aesthetic, the Zur Collection of wall sconces feature an innovative pivot design that aims light precisely as needed for way finding, architectural accents or landscape illumination. The elegant Zur Outdoor Collection blends seamlessly and inconspicuously into contemporary architecture and landscapes while providing efficient LED illumination.

### Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- IP65 rated

### Head pivots 240° for wall grazing or directional illumination

### SPECIFICATIONS

LUMENS	45°: 1613.3, 0°: 909.6
WATTS	20.4
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Adjustable
OPTICS	40° (2)
MOUNTING OPTIONS	Wall
ADJUSTABILITY	Head pivots 240°
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse
CCT	2700K, 3000K or 4000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	45°: B0-U1-G1, 0°: B1-U0-Go
DARK SKY	Compliant (Aimed down)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70: >60,000 Hours
WARRANTY*	5 Years
WEIGHT	20 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.




ZUR 24 WALL  
shown in black



ZUR 24 WALL  
shown in bronze

### ORDERING INFORMATION

PRODUCT	CRI/CCT	LENGTH	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
7000WZUR	927 90 CRI, 2700K 930 90 CRI, 3000K 940 90 CRI, 4000K	24 24"	Z BRONZE B BLACK	UNV 120V-277V	A ADJUSTABLE	NONE PC BUTTON PHOTOCONTROL LF IN-LINE FUSE

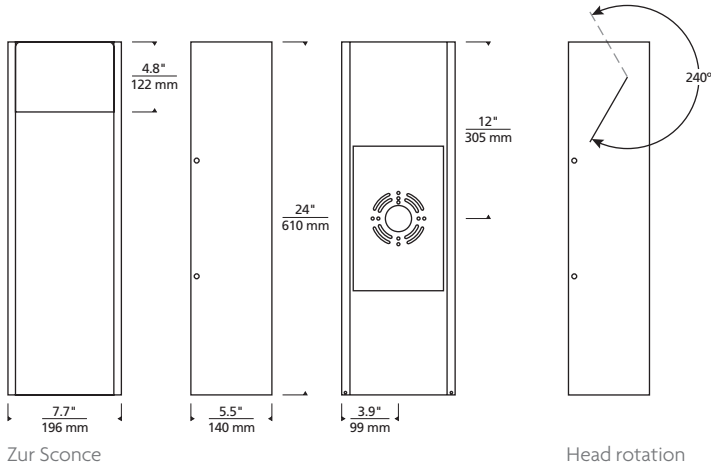

## PHOTOMETRICS\*



\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### ZUR 24 WALL - 45°

Total Lumen Output: 1613.3  
 Total Power: 20.4  
 Luminaire Efficacy: 79  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B0-U1-G1

### ZUR 24 WALL - 0°

Total Lumen Output: 909.6  
 Total Power: 20.4  
 Luminaire Efficacy: 44  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B1-U0-G0

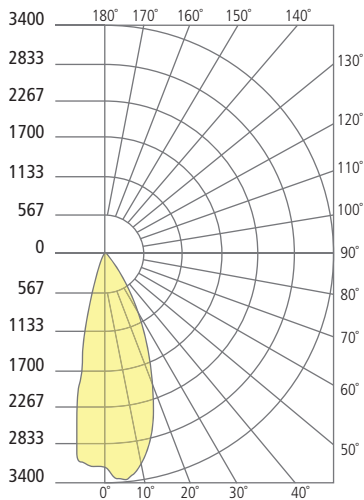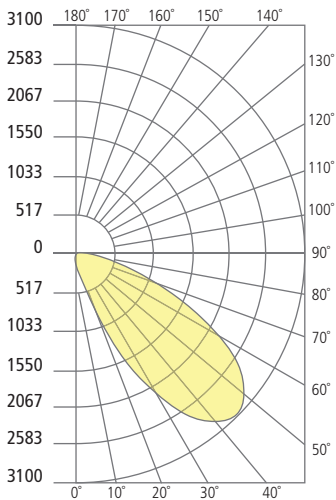

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2020 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.

TECH LIGHTING

VISUAL COMFORT & Co.

7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400