



iQ700, Induction hob, 60 cm, Black EX675LXV1E

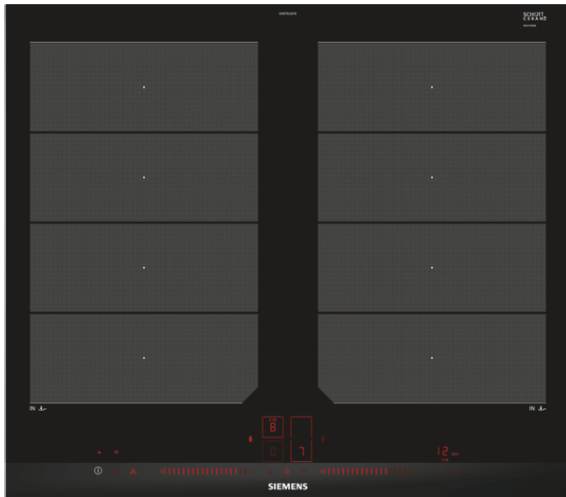

The modern induction cooktop – no more burning, thanks to fryingSensor Plus.

- ✓ Always the optimal cooking zone for your cookware - flexInduction
- ✓ Select and join the cooking zones with one neatly arranged interface – Dual light slider.
- ✓ Home Connect: Information about your cooktop, no matter where you are via smartphone or tablet.
- ✓ The fryingSensor plus controls the temperature in the pan
- ✓ powerMove Plus enables intuitive control thanks to three heating zones with different temperatures, just by moving the pan

Features

Technical Data

Product name/family : Cooking zone ceramic
 Construction type : Built-in
 Energy input : Electric
 Total number of positions that can be used at the same time : 4
 Required niche size for installation (HxWxD) : 51 x 560-560 x 490-500
 Width of the appliance : 602
 Dimensions : 51 x 602 x 520
 Dimensions of the packed product (HxWxD) (mm) : 126 x 753 x 603
 Net weight (kg) : 15.843
 Gross weight (kg) : 17.1
 Residual heat indicator : Separate
 Location of control panel : Hob front
 Basic surface material : Ceramic
 Color of surface : Black
 Approval certificates : AENOR, CE
 Length of electrical supply cord (cm) : 110
 EAN code : 4242003759011
 Electrical connection rating (W) : 7400
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50

Optional accessories

HZ9SE030 : , HZ9LP200 : , HZ9LP160 : , HZ9CF260 : , HZ394301 : ,
 HZ390522 : Griddle Plate , HZ390512 : Teppan Yaki (large) ,
 HZ390230 : , HZ390220 : , HZ390210 : , HZ390012 : , HZ390011 :



iQ700, Induction hob, 60 cm, Black EX675LXV1E

Features

Control

- Dual lightSlider
- fryingSensor plus with 5 temperature settings

Design

- 602 mm
- Stainless Steel side trim with bevelled front edge

Special features

- 2 flexInduction zones
- 4 induction cooking zones
- Home Connect - enables Remote Monitoring no matter where you are, with the easy-to-use Home Connect App
- cookConnect - hood control (with Wi-Fi enabled hood)
- powerMove plus
- quickStart function
- reStart function
- Timer for all zones
- Acoustic signal
- Count up timer
-
- Keep warm function
- 17 power levels
- Power boost setting
- panBoost
- Energy Consumption Display

Safety Features

- Automatic pan recognition
- Automatic safety switch off
- Control panel lock
- Control panel pause
-
- 2 stage residual heat indicators
- Main on/off switch

Power and size

- Cooking zones: 1 x Ø 380 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 380 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction

Technical information

- Installation measurements: 560 mmx490 mm
- Min. worktop thickness: 16 mm
- Connected load: 7.4 KW
- Connection cable 110 cm
- Cable included in packaging

iQ700, Induction hob, 60 cm, Black EX675LXV1E

Dimensioned drawings

