


Serie | 6, Induction hob with integrated ventilation system, 70 cm PVQ731F15E

B

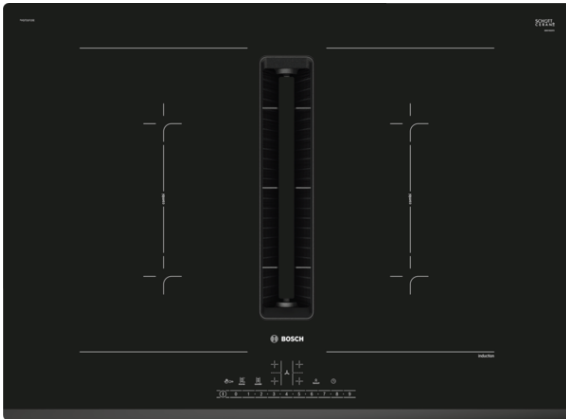

The induction hob with integrated ventilation module: combines induction with ventilation technology for perfect results.

- **DirectSelect:** Direct, simple selection of the desired cooking zone, power and additional functions.
- **CombiZone:** More flexibility by combining two cooking zones for cooking with even heat distribution for larger cookware like roasters.
- **AutoOn function:** Automatically starts the ventilation module on power level 3, when you start cooking.
- **Front-Bevel:** Elegant, appealing design with bevelled front.
- **MoveMode:** the automatic setting of cooking levels allows you to boil water on the front and simmer sauce on the rear cooking zone.

Technical Data

Product name/family :	Cooking zone ceramic
Construction type :	Built-in
Energy input :	Electric
Required niche size for installation (HxWxD) :	223 x 560-560 x 490-490
Width of the appliance :	710
Dimensions :	223 x 710 x 522
Dimensions of the packed product (HxWxD) (mm) :	430 x 940 x 660
Net weight (kg) :	24.445
Gross weight (kg) :	29.3
Residual heat indicator :	without
Location of control panel :	Hob front
Basic surface material :	Ceramic
Color of surface :	Black
Approval certificates :	CE, VDE
Length of electrical supply cord (cm) :	110
Sealed Burners :	No
heating with booster :	All
Power of 2nd heating element (kW) :	3.6
Maximum output air extraction (m ³ /h) :	500
Boost position output recirculating (m ³ /h) :	615.0
Maximum output recirculating air (m ³ /h) :	500
Boost position air extraction (m ³ /h) :	622
Noise level (dB(A) re 1 pW) :	69
Odour filter :	No
Operating Mode :	Convertible
Delay Shut off modes :	30
Electrical connection rating (W) :	7400
Voltage (V) :	220-240/380-415
Frequency (Hz) :	50-60
Main colour of product :	Black
Approval certificates :	CE, VDE
Length of electrical supply cord (cm) :	110
Required niche size for installation (HxWxD) :	223 x 560-560 x 490-490
Dimensions :	223 x 710 x 522
Dimensions of the packed product (HxWxD) (mm) :	430 x 940 x 660
Net weight (kg) :	24.445
Gross weight (kg) :	29.3



Serie | 6, Induction hob with integrated ventilation system, 70 cm PVQ731F15E

The induction hob with integrated ventilation module: combines induction with ventilation technology for perfect results.

Design

- Front facette design

Quickness

- PowerBoost function for all zones

Special features

- 4 induction cooking zones
- 2 Combi zones
- DirectSelect
- MoveMode: MoveMode (2 levels)
- Digital display, red
- Timer for all zones
Timer - shows how long the cooktop is in use
- ReStart function
- QuickStart function

Power and size

- Cooking zones:
1 x 380 mm x 210 mm, 3.6 KW Induction or 2 x 190 mm, 210 mm, 2.2 KW (max. power 3.7 KW) Induction;
1 x 380 mm x 210 mm, 3.6 KW Induction or 2 x 190 mm, 210 mm , 2.2 KW (max power 3.7 KW) Induction
- Variable 17-stage power settings for each zone

Safety Features

- 2 stage residual heat indicator for each zone
- Main on/off switch
- Automatic pan recognition sensor
Automatic safety shut off
Control panel lock
Control panel lock function
- Energy consumption display

Technical information

- Measurement: (H/B/T) 223 x 710 x 522 mm
- Installation dimensions: (ID/W/D) 223 mm x 560 mm x 490 mm
- Suitable for installation into a 60 cm base cabinet
- Min. worktop thickness: 16 mm (Installation in thinner worktops is also possible with the spare part: 626792)
- Length wire connection: 110 cm
- Connected load: 7.4 KW
- Cable included

Integrated ventilation downdraft system

- Induction cooktop with fully integrated high-performance downdraft extractor.
- Suitable for ducted or recirculated extraction configuration (incl. differentiated software modes). Respective mandatory installation accessories required:
 - HEZ9VEDU0 for ducted extraction
 - Starter kit HEZ9VRUD0 for unducted recirculation with cleanAir odour filters.
 - HEZ9VRPD0 for fully ducted and partly-ducted recirculation with cleanAir odour filters.
- HEZ9VEDU0 for ducted extraction
- HEZ9VRPD0 for fully ducted and partly-ducted recirculation with cleanAir odour filters. Starter kit HEZ9VRUD0 for unducted recirculation with cleanAir odour filters.
- Aesthetically integrated fully flush air intake design with floating, heat resistant glass ceramics element for free movement and placement of cookware.
- Ventilation system with 9 electronically controlled fan power levels and 2 Boost-/Intensive fan power levels (with automatic revert) via DirectSelect user interface:
 - Automatic switch-on of ventilation system when a cooking zone is used.
 - Automatic delayed shut-off after cooking to erase residual odors after cooking (in specific ultra low-noise fan level, 12min in ducted extraction, 30min in recirculated extraction, can be shut-off manually).
 - Fully manual control possible via DirectSelect.
- Automatic switch-on of ventilation system when a cooking zone is used.
- Automatic delayed shut-off after cooking to erase residual odors after cooking (in specific ultra low-noise fan level, 12min in ducted extraction, 30min in recirculated extraction, can be shut-off manually).
- Fully manual control possible via DirectSelect.
- High-performance, low-noise motor with energy-efficient BLDC-technology. High extraction rates at very low noises with pleasant noise frequencies through psycho-acoustically and aerodynamically optimised interior with enclosed, hidden motor. Highly pressure-drop resistant even with longer and more complex ducting systems.
- Easy-to-detach and easy-to-clean grease filter and liquid collector unit:
 - Convenient one-hand removal of unit via floating glass ceramics handle.
 - Integrated, large-scale, high performance stainless-steel grease filters with 12 filtration layers and one black top

- layer for enhanced aesthetical integration. Grease filtration efficiency of 94 %.
- All parts of the unit are easy-to-clean, fully dishwasher safe and heat resistant.
 - (Upper) Liquid collector unit with 200ml of capacity for standard accidental spillages or cooking condensate.
 - Powerful drainage system for spillages that exceed 200ml of liquids.
 - Liquid safety collector with additional capacity of 700ml for more severe accidental situations. Dishwasher safe. Easily accessible and detachable from below.
 - Overall capturing capacity of 900ml (200ml + 700ml).
 - Watertight motor system.
- - Convenient one-hand removal of unit via floating glass ceramics handle.
 - - Integrated, large-scale, high performance stainless-steel grease filters with 12 filtration layers and one black top layer for enhanced aesthetical integration. Grease filtration efficiency of 94 %.
 - - All parts of the unit are easy-to-clean, fully dishwasher safe and heat resistant.
 - - (Upper) Liquid collector unit with 200ml of capacity for standard accidental spillages or cooking condensate.
 - - Powerful drainage system for spillages that exceed 200ml of liquids.
 - - Liquid safety collector with additional capacity of 700ml for more severe accidental situations. Dishwasher safe. Easily accessible and detachable from below.
 - - Overall capturing capacity of 900ml (200ml + 700ml).
 - - Watertight motor system.
- Ventilation system performance:
- Extraction performance in ducted extraction (according to EN 61591): min. normal setting 154 MQH, max. normal setting 500 MQH, max. Boost-/Intensive setting 622 MQH.
 - Extraction performance in recirculated extraction (according to EN 61591): min. normal setting 150 m³/h, max. normal setting 500 m³/h, max. Boost-/Intensive setting 615 m³/h.
 - Noise level in ducted extraction (Sound power level according to EN 60704-3): min. normal setting 42 dB re 1 pW, max. normal setting 69 dB re 1 pW, max. Boost-/Intensive setting 74 dB re 1 pW.
 - Noise level in recirculated extraction (Sound power level according to EN 60704-3.): min. normal setting 41 dB re 1 pW, max. normal setting 68 dB re 1 pW, max. Boost-/Intensive setting 72 dB re 1 pW.
 - Grease filter efficiency (according to EN 61591) 94 %.
- All performance data is preliminary and based on latest test results with advanced prototypes and will be updated with tests from final products.
- - Extraction performance in ducted extraction (according to EN 61591): min. normal setting 154 m³/h, max. normal setting 500 m³/h, max. Boost-/Intensive setting 622 m³/h.
 - - Extraction performance in recirculated extraction (according to EN 61591): min. normal setting 150 m³/h, max. normal setting 500 m³/h, max. Boost-/Intensive setting 615 m³/h.
 - - Noise level in ducted extraction (Sound power level according to EN 60704-3): min. normal setting 42 dB re 1 pW, max. normal setting 69 dB re 1 pW, max. Boost-/Intensive setting 74 dB re 1 pW.
 - - Noise level in recirculated extraction (Sound power level according to EN 60704-3.): min. normal setting 41 dB re

- 1 pW, max. normal setting 68 dB re 1 pW, max. Boost-/Intensive setting 72 dB re 1 pW.
- - Grease filter efficiency (according to EN 61591) 94 %.
 - All performance data is preliminary and based on latest test results with advanced prototypes and will be updated with tests from final products.
 - Consumption data and energy efficiency (according to Regulation (EU) No 65/2014):
 - Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D).
 - Fluid Dynamic Efficiency: A.
 - Average energy consumption: 57.
 - Grease filtration efficiency class: B.
 - Noise min. normal setting & max. normal setting: 42 dB & 69 dB.
 - - Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D).
 - - Fluid Dynamic Efficiency: A.
 - - Average energy consumption: 57.
 - - Grease filtration efficiency class: B.
 - - Noise min. normal setting & max. normal setting: 42 dB & 69 dB.
 - 2 x 2 sets of directly integrated, high-performance cleanAir odour filters (in recirculation configuration).
 - Optimised odour reduction performance for cooking applications with complex odour molecules (e.g. fish).
 - Large scale filter surface with high odour reduction capabilities.
 - Lifetime of 360 hours of cooking (non-regenerative).
 - Low-noise filters with optimised psycho-acoustics.
 - Easy-to-access and easy-to-remove from above.
 - Replenishment cleanAir filter set HEZ9VRCR0.
 For ducted extraction configuration: 2 x 2 sets of directly integrated, high-performance low-noise acoustic filters for significantly lower noise and improved psycho-acoustics.
 - - Optimised odour reduction performance for cooking applications with complex odour molecules (e.g. fish).
 - - Large scale filter surface with high odour reduction capabilities.
 - - Lifetime of 360 hours of cooking (non-regenerative).
 - - Low-noise filters with optimised psycho-acoustics.
 - - Easy-to-access and easy-to-remove from above.
 - - Replenishment cleanAir filter set HEZ9VRCR0.
 - For ducted extraction configuration: 2 x 2 sets of directly integrated, high-performance low-noise acoustic filters for significantly lower noise and improved psycho-acoustics.

Planning & installation notes


- Suitable for ducted or recirculated extraction installations. Respective mandatory installation accessories required:
 - HEZ9VEDU0 for ducted extraction.
 - Starter kit HEZ9VRUD0 for unducted recirculation with cleanAir odour filters.
 - HEZ9VRPD0 for fully ducted and partly-ducted recirculation with cleanAir odour filters.
- HEZ9VEDU0 for ducted extraction.
- HEZ9VRPD0 for fully ducted and partly-ducted recirculation with cleanAir odour filters. Starter kit HEZ9VRUD0 for unducted recirculation with cleanAir odour filters.
- Planning suggestions:
 - Installation is possible in island as well as wall oriented configurations.
 - The product complies with the Needle Flame Test (according to IEC 60695-5-11), the V2 flammability class (according to UL94) and the B1 building material class (DIN 4102-1). The starter kit HEZ9VRUD0 for unducted recirculation complies with these standards as well.
 - The max. immersion depth is 223mm below glass for top mounted appliances and 227mm for flush installed appliances.
 - The appliance must be freely accessible from below (i.e. for accessing the lower liquid safety collector). - No false floor is necessary below the cooktop with integrated downdraft ventilation system. The drawers and/or shelves in the floor unit must be removable. The backpanel of the floor unit can be kept - only a cut-out for the air outlet is needed (position and size can be taken from the installation instructions).
 - The "Plug 'n Play" starter kit HEZ9VRUD0 for unducted recirculation requires a vertical aperture of min. 25mm behind the backpanel of the furniture. Suggested for ideal performance are 50mm.
 - The minimum worktop thickness is 16mm for top mounted and flush installed appliances with the standard installation system. Installation in even thinner worktops is also possible with the spare part: content 626792.
 - The overall appliance weight is 26kg - the bearing capacity and stability, in the case of very thin worktops in particular, must be supported using suitable substructures. The overall appliance weight and the worktop manufacturer's structural integrity specifications are to be taken into account.
 - The "Plug 'n Play" starter kit HEZ9VRUD0 for unducted recirculation enables easy and quick installations and can be planned in all worktop depths ≥ 60 cm. For ducted installations
 - in ducted extraction (HEZ9VEDU0) as well as fully or partly ducted recirculation (HEZ9VRPD0) - a worktop depth of ≥ 70 cm is required.
 - For partly ducted and unducted recirculation extraction installations, a return-flow aperture of ≥ 400 cm² is to be respected in the plinth area. The aperture can be realized via outlet grids, lamella grids or subtly shortened plinths depending on the assortment of the kitchen furniture manufacturer.
 - The air outlet on the backside of the appliance can directly be accessed with a male flat duct element (DN 150).
 - The pressuredrop resistant blower allows longer and more complex ductings up to 8m with three 90° bows while keeping sufficient performance.
 - When installing a ventilation hood with ducted extraction and a chimney-vented fireplace, the power supply line of the appliance needs a suitable safety switch. This is not required for configurations in recirculated extraction.
- In ducted extraction configuration a one-way flap (or backflow trap) with a maximum opening pressure of 65Pa should be installed.
- Installation is possible in island as well as wall oriented configurations.
- The product complies with the Needle Flame Test (according to IEC 60695-5-11), the V2 flammability class (according to UL94) and the B1 building material class (DIN 4102-1). The starter kit HEZ9VRUD0 for unducted recirculation complies with these standards as well.
- The max. immersion depth is 223mm below glass for top mounted appliances and 227mm for flush installed appliances.
- The appliance must be freely accessible from below (i.e. for accessing the lower liquid safety collector).
- No false floor is necessary below the cooktop with integrated downdraft ventilation system. The drawers and/or shelves in the floor unit must be removable. The backpanel of the floor unit can be kept - only a cut-out for the air outlet is needed (position and size can be taken from the installation instructions).
- The "Plug 'n Play" starter kit HEZ9VRUD0 for unducted recirculation requires a vertical aperture of min. 25mm behind the backpanel of the furniture. Suggested for ideal performance are 50mm.
- The minimum worktop thickness is 16mm for top mounted and flush installed appliances with the standard installation system. Installation in even thinner worktops is also possible with the spare part: content 626792.
- The overall appliance weight is 26kg - the bearing capacity and stability, in the case of very thin worktops in particular, must be supported using suitable substructures. The overall appliance weight and the worktop manufacturer's structural integrity specifications are to be taken into account.
- The "Plug 'n Play" starter kit HEZ9VRUD0 for unducted recirculation enables easy and quick installations and can be planned in all worktop depths ≥ 60 cm. For ducted installations
 - in ducted extraction (HEZ9VEDU0) as well as fully or partly ducted recirculation (HEZ9VRPD0) - a worktop depth of ≥ 70 cm is required.
 - For partly ducted and unducted recirculation extraction installations, a return-flow aperture of ≥ 400 cm² is to be respected in the plinth area. The aperture can be realized via outlet grids, lamella grids or subtly shortened plinths depending on the assortment of the kitchen furniture manufacturer.
 - The air outlet on the backside of the appliance can directly be accessed with a male flat duct element (DN 150).
 - The pressuredrop resistant blower allows longer and more complex ductings up to 8m with three 90° bows while keeping sufficient performance.
 - When installing a ventilation hood with ducted extraction and a chimney-vented fireplace, the power supply line of the

appliance needs a suitable safety switch. This is not required for configurations in recirculated extraction.

- - In ducted extraction configuration a one-way flap (or backflow trap) with a maximum opening pressure of 65Pa should be installed.


**Serie | 6, Induction hob with integrated ventilation system, 70 cm
PVQ731F15E**

measurements in mm
Side view

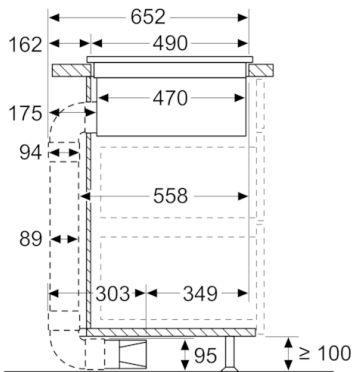


With 3rd party 90° bow

measurements in mm

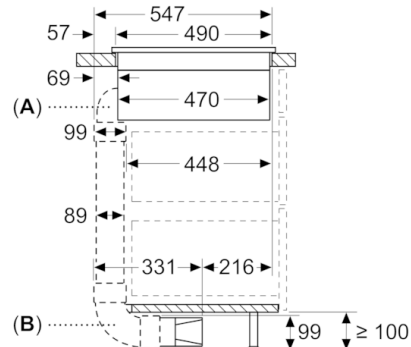


A: With 90° "S" bow connector
(available from 05/2021 on)
B: With 90° "L" bow connector

measurements in mm

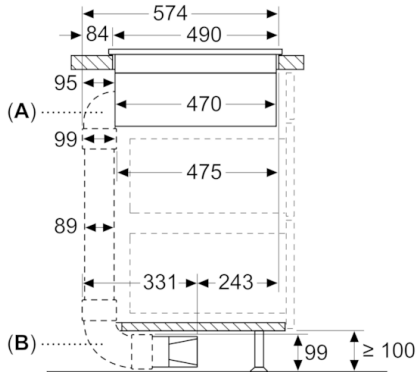


A: With 90° "M" bow connector
B: With 90° "L" bow connector

measurements in mm

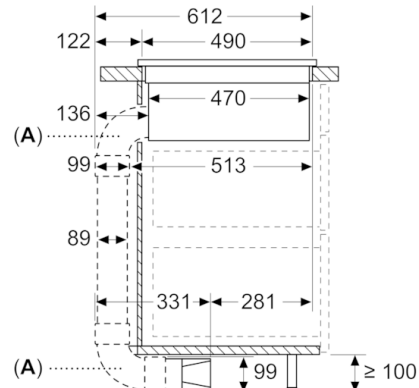


A: With 90° "L" bow connectors

measurements in mm

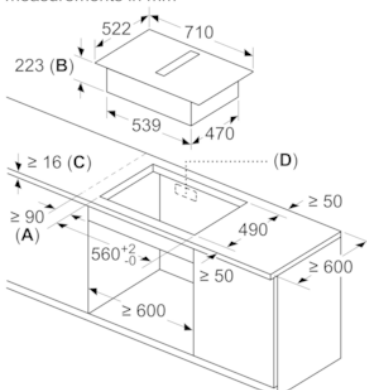


A: Minimum distance from the hob cut-out to the wall
B: Recessing depth
C: The worktop into which the hob is installed

measurements in mm
Front view – unit cut-out for unducted recirculation

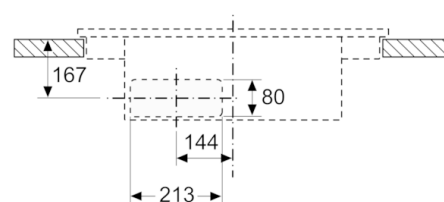


**Serie | 6, Induction hob with integrated ventilation system, 70 cm
PVQ731F15E**

measurements in mm
Front view

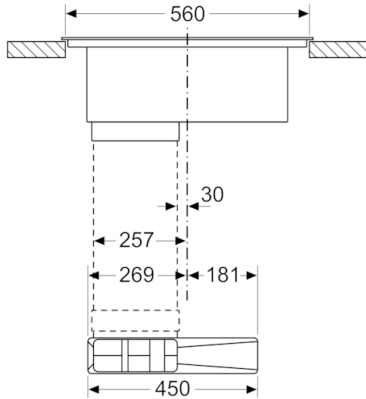


measurements in mm
Front view

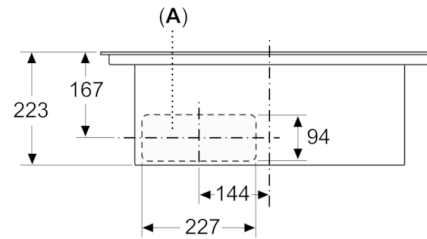


A: Connected directly at the rear

measurements in mm

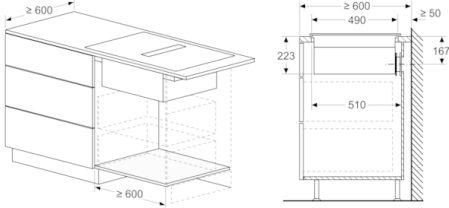

measurements in mm



When installing directly against outer walls that are not insulated ($\mu \geq 0.5 \text{ W/m}^2\text{C}$), we recommend using partially or fully ducted recirculation configurations.