

*Mid Ulster*

***Rotating Electrics Ltd***

**Specialists in Starters, Alternators  
& Auto Electrical Parts**

**Superseal Assembly  
Instructions**

Thank you for your purchase of super seals

This manual will help you fit the product you purchased weather it be a one way supper seal or a five way super seal



This is what you should receive from us in the post :

2 way: 2 male 2 female terminals 4 rubber plugs and your super seals

3 way: 3 male 3 female terminals 6 rubber plugs and your super seals


4 way: 4 male 4 female terminals 8 rubber plugs and your super seals

5 way: 5 male 5 female 10 rubber plugs and your super seals

## Step 1

Strip the wire down and slide the rubber plugs on to the cable

As shown below

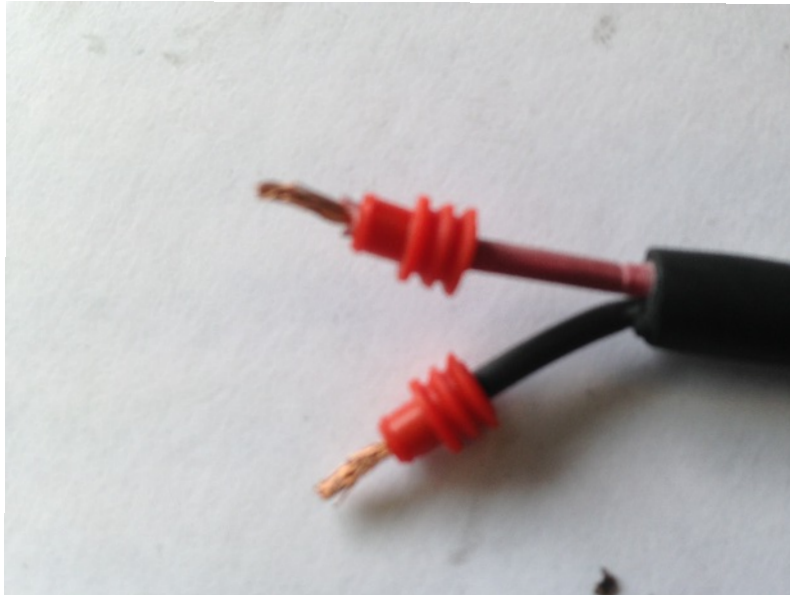

## Step 2

Place the female terminals on the copper wire and crimp them on

It should look like the picture below




### Step 3

Slip the female terminals you just crimped on into the male connector

It should look like the picture below and be a bit tight to pull out

Push down on the red end to lock them in place

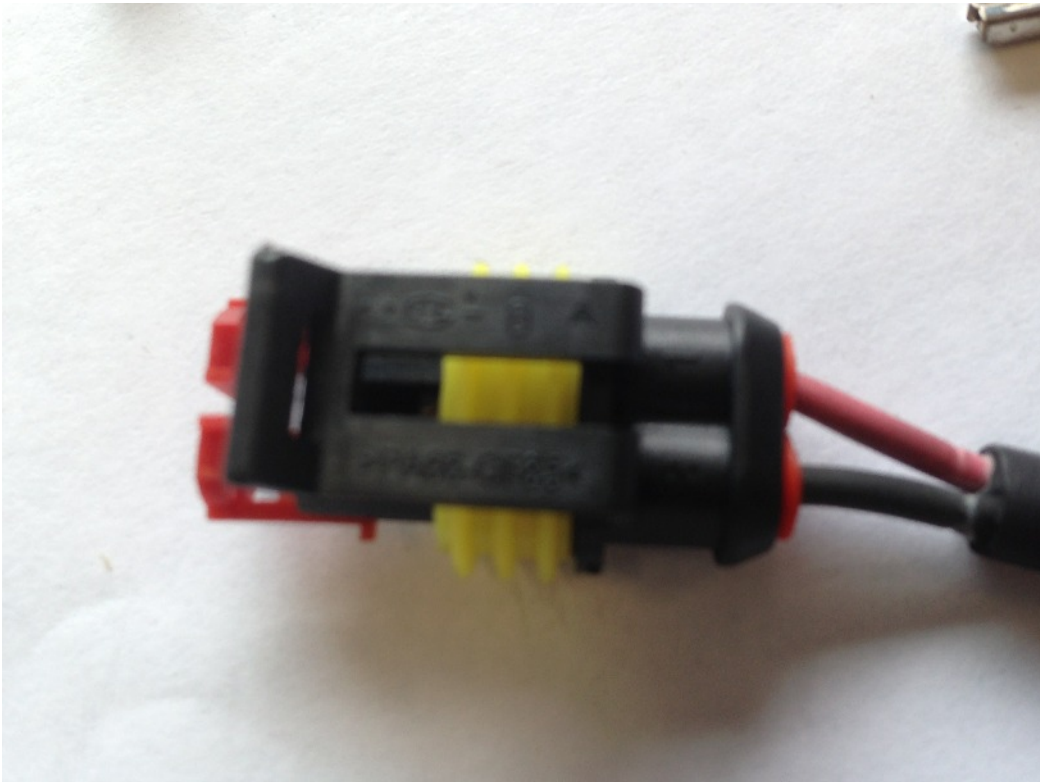

### Step 4


On the other end of your cable connect the male terminals to the copper cable

Crimp them on the same as you did on step 2



## Step 5

Slip your ends into the female connector once again they should be nice and sturdy and a bit hard to pull out.

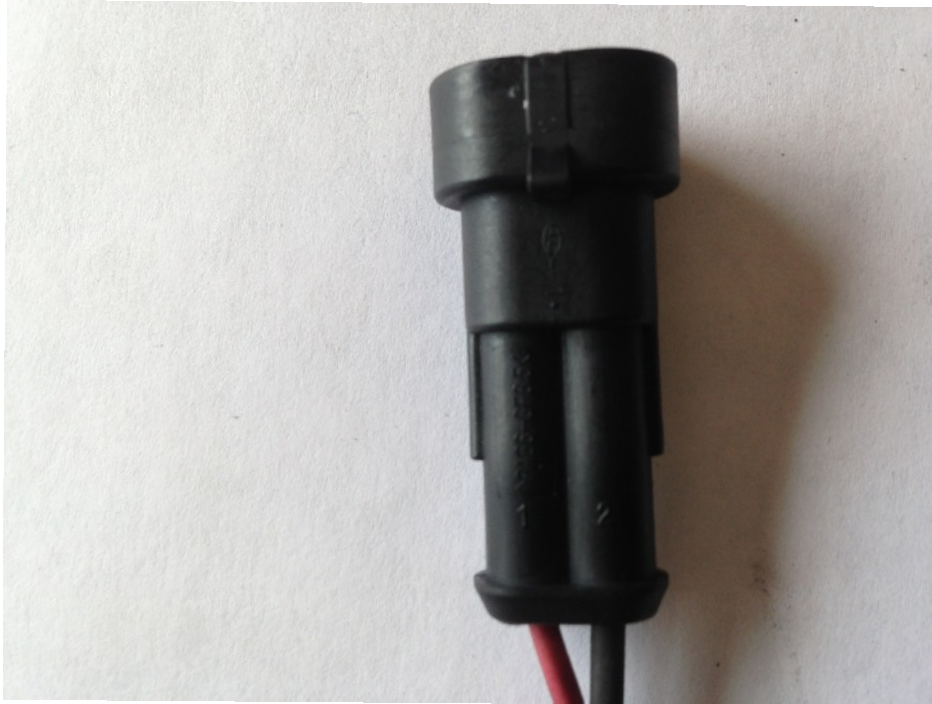

## Step 6

Make sure that your cables are lined up like for like before connecting

That's you ready to go just connect up the 2 super seal connectors.

