

# Tail

## for Triumph Speed Twin 1200 (Model Year 2022)

Part number: RMC-011100

### Instruction Manual

Version: 1

Date: 21.03.2022

Read and save this manual for future reference. Before attempting to assemble, install, operate the products, please ensure a complete understanding of the instructions and any other documents related to the products, including but not limited to a provided disclaimer. Failure to comply with instructions in this manual could result in serious injury, death and/or property damage. This manual is subject to change without notice.



## Important note

Products of Rennstall Moto or any of its affiliates (collectively, "Rennstall") are sold "AS IS" without any express or implied warranties. To the fullest extent permitted by law, Rennstall disclaims any and all warranties. Installation or usage of Rennstall's products may affect warranties of utilized vehicles, such as motorcycles.

ANY BUYER OR USER OF PRODUCTS OF RENNSTALL EXPRESSLY AND VOLUNTARILY ASSUMES ANY AND ALL RISKS INCLUDING, BUT NOT LIMITED TO, DEATH, DISABILITY, AND/OR SERIOUS PHYSICAL INJURY, RELATED TO THE INSTALLATION OR USAGE OF SUCH PRODUCTS BY BUYER, USER OR ANY THIRD PARTY.

Under no circumstances are Rennstall's products to be used on public roads or any other streets, highways, or off-road areas. Rennstall's products are solely intended for use on vehicles operated on closed-course facilities, show events or racetracks, each with appropriate supervision of qualified individuals to ensure safety of all involved parties.

Always use caution when installing or using Rennstall's products, adhere to all instructions, only utilize provided hardware or tools, and do not modify or otherwise alter the products.

Prior to any usage of Rennstall's products, a buyer or user shall inspect and verify the integrity of the entire vehicle upon which such products are mounted, installed, or otherwise attached. Vehicles are to be inspected before each use for evidence of damage, defect, or wear to ensure the vehicle is fit and ready for operation. Without limiting the generality of the foregoing, buyer or user shall specifically inspect all bolts after each usage in excess of Two Hundred (200) kilometers or One Hundred Twenty-Five (125) miles.

Under no circumstances and under no legal theory whether in tort, contract, or otherwise shall Rennstall or its employees, agents, representatives, successors, or assigns, be liable to a buyer, user or any other person for any direct, indirect, special, incidental, or consequential damages of any kind arising out of or relating to the installation or usage of the products, even if Rennstall has been informed of the possibility of such damages, or for any claim by any other party.



# Tail (Fig.1)

Part Number: RMC-011100

**Time:**  
<1h

**Preparation:**  
Remove the original seat

## Steps:

- 1 Remove the forward two M6 bolts on the underside of the rear fender. → Fig.2
- 2 Interlock the C-shaped mounting bracket on the underside of the tail with the tube-shaped part on the tank. → Fig.3

- 3 Use the two M6 bolts to fix the tail in place. Torque down to 12Nm (8.9 ft·lb). → Fig.4

In the case of difficulties threading the bolt, the two sleeves can be moved forward and backward by approx. 7mm thanks to a long hole in the frame. → Fig.5

## Note:

Pictures shown are with a Raisch Heck Weck tail tidy, our recommendation for a puristic cafe racer look.

Always store the included tool inside the right-hand side cover in case you need to remove the tail while you are on the road!

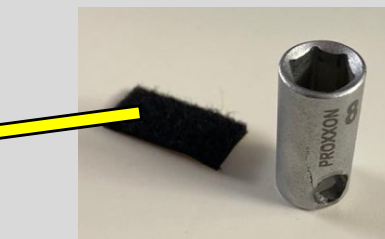


Fig.1



Fig.2



Fig.3



Fig.4

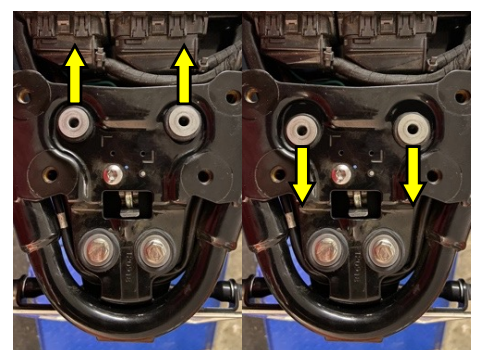


Fig.5