

Hotel Solutions

RUBICON
BMS

Z35

Capacitive touch panel with a backlit 3.5" display, proximity sensor, internal temperature probe and thermostat for two independent areas.

It is able to contain up to 56 controls/indicators, distributed in up to 7 pages with a navigation menu. A screensaver with an image, date, time and/or temperature is set when the touch panel is not in use and the menu is shown automatically when the user approaches thanks to the proximity sensor.

Its brightness is regulated by the ambient luminosity sensor included. In addition, it incorporates 4 analog-digital inputs that may be configured as binary inputs for sensors and potential-free push buttons, as temperature probe inputs or as motion sensor inputs.

Accessories: temperature probe and motion sensor.

Available cover options:



Anthracite



Silver



White



Gloss white



ZVI-Z35-A
(86 x 86 x 10 mm)



Z35 installed in **Hotel & Spa La Residencia Puerto Tarifa** (Cádiz) - Spain.
www.laresidenciatarifa.com

The hotel has rooms with the latest technology for the guest to get a superior experience: lighting regulation, air conditioning management, execution of personalized scenes, indication of privacy status in room, and so on.

Z70

Color capacitive touch panel with 7" display for total control in smart homes and hotel rooms in a minimalist aesthetic environment.

The built-in proximity sensor makes the screensaver appear when the touch panel is not being used and the luminosity sensor adjusts the brightness automatically. Z70 incorporates an internal temperature probe, thermostat and 4 analog-digital inputs. It includes USB and Ethernet port for program update. Installation in standard double mounting box.

Advanced features can be activated with the following licenses:

- Smartphone Control License – Remote control from smartphones and tablets through a mobile app.
- Video Intercom License – Integration with the video intercom Zennio GetFace IP.
- Video Call License – Reception of calls from video intercom Zennio GetFace IP in mobile app.

Accessories: temperature probe and motion sensor.
* Check availability.



ZVIZ70A
(137 x 189 x 12 mm)

Available cover options:



Anthracite



Silver



White



Gloss white



Z41 Lite

Z41 Lite is a capacitive touch panel which represents an advance in digital home control.

Minimalist aesthetics, dominated by simple forms, lead to a timeless design that facilitates integration within working and living environments. Its 4.1" color display in portrait (3:4) makes your management and enjoyment easier. Up to 96 controls to enable distributed communication within the intelligent home.

Z41 Lite includes an internal clock with battery, USB port for program updates and 2 analog/digital inputs for great functionality.

Accessories: temperature probe and motion sensor.

Frame options:



Polycarbonate
Anthracite



Polycarbonate
Silver



Polycarbonate
White



Aluminium



Golden



Chrome

Flush-mounted:



Accessory
ZAC-FLTMD



ZVI-Z41LIT-W
(123 x 90 x 13 mm)



Z41 Pro

Z41 Pro is a capacitive touch panel with up to 96 control functions.

Minimalist aesthetics, dominated by simple forms, lead to a timeless design that facilitates integration within working and living environments. Its 4.1" color display in portrait (3:4) makes your management and enjoyment easier. Up to 96 controls to enable distributed communication within the intelligent home.

Z41 Pro includes an internal clock with battery, USB port for program updates and 2 analog/digital inputs for great functionality. An IP port is incorporated for remote control from smartphones or tablets through free mobile apps.

Accessories: temperature probe and motion sensor.

Frame options:



Polycarbonate
Anthracite



Polycarbonate
Silver



Polycarbonate
White



Aluminium



Golden



Chrome

Flush-mounted:



Accessory
ZAC-FLTMD



ZVI-Z41PRO-SP
(123 x 90 x 13 mm)



Remote control

App for the visualization and control from mobile devices (smartphones y tablets).
You will be able to interact with your installation in a quick, easy and safe way anywhere, anytime!
You only need a Z41 Pro/COM or Z70 (with Smartphone Control License) connected to the Internet.



Scenes activation
(enter, exit, relax, work...).

Automatic real-time
notifications and alerts
in your mobile device.

Complete management and
remote controlling of air
conditioning, heating, lighting
and other systems.



Z41 Remote



Z41 COM

Z41 COM is a capacitive touch panel with additional communication features, including video intercom based in Zennio GetFace IP System.

Complying with minimalist aesthetics and with the control capabilities of Z41 family (up to 96 functions available), Z41 COM allows a complete communication in smart homes, thanks to the integration with the video intercom Zennio GetFace IP, including microphone and loudspeakers. Remote control from smartphones and tablets through the free mobile app Z41 Remote.

It includes USB port for configuration download and Ethernet port. Plug&play system without additional configurations. Installation in portrait or landscape is possible. It does not include inputs. Not compatible with other video intercom systems different from Zennio GetFace IP.

Frame options:



Polycarbonate
Anthracite



Polycarbonate
Silver



Polycarbonate
White




ZVI-Z41COM-AP
(123 x 90 x 13 mm)




GetFace IP Video Intercom

Zennio GetFace IP is the video intercom system that includes the outdoor video intercom unit (with keypad, individual buttons module, RFID card reader...) and the touch panels Z41 COM or Z70 (with Video Intercom License) to receive the external calls, communicate with the outdoor unit and open the door.
For community buildings, the IP network infrastructure is also integrated for the communication with each apartment.



Flush installation frames
ZVP-FFRA1/2/3



Surface installation frames
ZVP-CB1M/2M/3M



Access control - IDAC

Zennio access controller for in-door mounting identifies guests through NFC card or BlueTooth®, allowing or denying admission to the room or certain common areas according to their permissions.

Rechargeable batteries are included to make the system autonomous in case of a power failure.

Several standard designs are available for external module (with or without doorbell button) and internal module (with DND/MUR buttons, DND only or nothing).

LED indicators notify not only the access status but also the room (DND/MUR) and occupancy status for hotel staff to improve guests' privacy.


Door opening is secured thanks to an anti-panic lock with anti-theft mode, which avoids the opening with a credit card.

Options available for handles and cylinder cover plate.

Zennio Server required. Other accessories are NFC Card Recorder and NFC Cards. Compatible with MIFARE DESFire EV1 and MIFARE Classic cards.



ZVUIDACOUTA2
(62 x 78 x 9.6 mm)

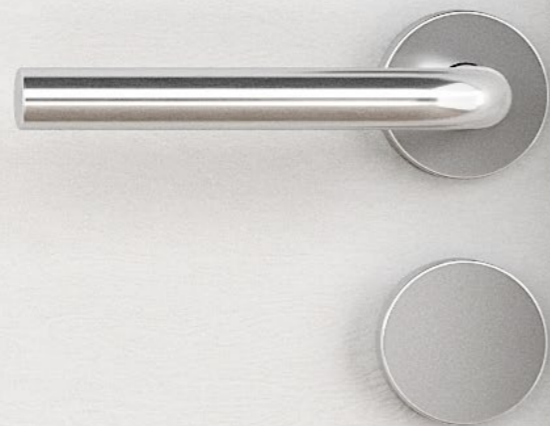

Available cover options:



Anthracite



Silver



White



Access control - IWAC Display

Zennio customizable access controller for hotels identifies guests for room access through NFC card or Bluetooth®, allowing or denying admission to the room or certain common areas according to their permissions.

Room number or name can be shown on its 2.4" OLED display, as well as do-not-disturb or make-up-room status and access information in multiple languages. Each hotel can create unique compositions, including images, icons, texts or logos, which are printed on a high strength tempered glass. This customization shows or hides up to 3 available buttons which could be used for door bell, corridor lighting control or specific hotel staff functions.

In addition, it incorporates 2 analog-digital inputs that may be configured for potential-free sensors and push buttons, temperature probes or motion sensors. Door opening is secured thanks to Securel (ref. ZIOSECV2), an encrypted relay placed inside the room (safe area). Zennio Server required.

Available in White/Anthracite standard and customized. Other accessories for the door lock available are Electric strike, Plate for electric strikes, NFC Card Recorder and NFC Cards. Compatible with cards MIFARE DESFire EV1 and MIFARE Classic.

Available cover options:



Anthracite




Silver



White



ZVIIWACDV3
(81 x 81 x 9 mm)



IWAC Display - Standard design



ZV11WACDV3A
(81 x 81 x 9 mm)

Available colors:



Available options:



Customizable capacitive touch panels

Flat · Flat 55 · TMD · Tecla 55

Fully customizable capacitive touch panels to fulfil the design requirements of any automation project needing touch panels with a custom aesthetic, either by branding or coherence with the environment.

TMD Design is a web application from which it is possible to customize these series touch panels in an aesthetical and functional way.

Flat and TMD family designs are printed on high strength tempered glass. You can select a color or add an image as a background, modify the color and shape of the tactile areas and LED indicators or add graphic elements in an intuitive way. A complete set of icons is available along with the ability of adding text to complete your design.

For Tecla 55, the backlit icons can be selected to easily identify each button in an anthracite, silver or white polycarbonate finish.

Endless combinations for creating your unique design.



Flat Display - Customizable

Backlit capacitive touch panel in Flat family, with proximity sensor, flat design (9 mm) and total customization.

Anyone can create unique compositions, including images, icons, texts or logos, which are printed on a high strength tempered glass. Room control is simple with the 5 buttons available and up to 8 indicators can be shown on its 2.4" display. The backlit icons for buttons regulate their brightness with the included ambient luminosity sensor and attenuate when the user is not detected by the proximity sensor.

Flat Display includes an internal temperature probe and thermostat, as well as 2 analog-digital inputs that may be configured for potential-free sensors and push buttons, temperature probes or motion sensors.

Accessories: temperature probe and motion sensor.

Available cover options:



Anthracite



Silver



White



Gloss white



ZVI-FD
(81 x 81 x 9 mm)



Flat 1/2/4/6 - Customizable

Backlit capacitive touch switches in Flat family, with proximity sensor, flat design (9 mm) and total customization.

Anyone can create unique compositions, including images, icons, texts or logos, which are printed on a high strength tempered glass. There are models with 1, 2, 4 or 6 configurable buttons and backlit icons, which regulate their brightness with the included ambient luminosity sensor and attenuate when the user is not detected by the proximity sensor.

Flat 1/2/4/6 incorporates an internal temperature probe and thermostat, as well as 2 analog-digital inputs that may be configured for potential-free sensors and push buttons, temperature probes or motion sensors.

Accessories: temperature probe and motion sensor.

Available cover options:



Anthracite




Silver



White



Gloss white

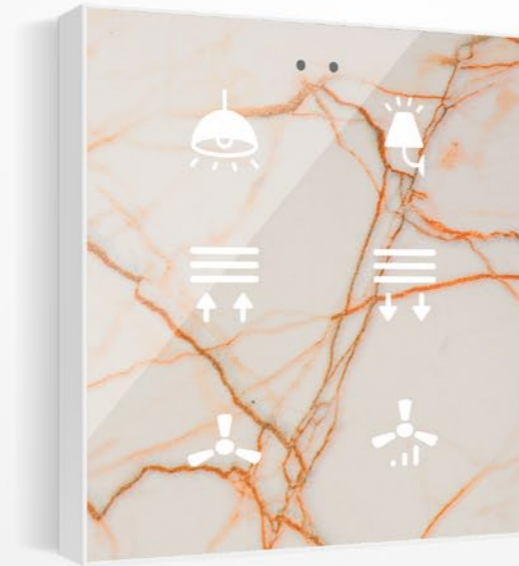

ZVI-F6
(81 x 81 x 9 mm)






ZVI-F4
(81 x 81 x 9 mm)



ZVI-F2
(81 x 81 x 9 mm)



Flat 1/2/4/6 - Standard design

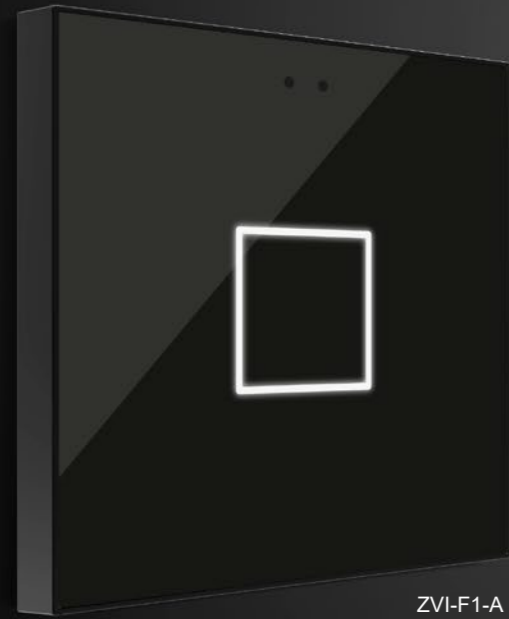

ZVI-F1-A
(81 x 81 x 9 mm)

Available colors:



Available options:



Flat 55 Display - Customizable

Backlit capacitive touch panel with round display in Flat 55 family (standard frames 55x55 mm), with proximity sensor, flat design, with total customization. Flush fitting with Zennio ZS55 frames, switches and sockets.

Anyone can create unique compositions, including images, icons, texts or logos, which are printed on a high strength tempered glass. Room control is simple with the 4 buttons available and up to 4 indicators can be shown on its central display. The backlit icons for buttons regulate their brightness with the included ambient luminosity sensor and attenuate when the user is not detected by the proximity sensor.

Flat 55 Display includes a thermostat, as well as 2 analog-digital inputs that may be configured for potential-free sensors and push buttons, temperature probes or motion sensors. Installation in standard mounting box with 55x55 frames of 1/2/3/4 modules (white, gloss white, anthracite or silver). Frame not included.

Accessories: temperature probe (included) and motion sensor.

Available cover options:



Anthracite



Silver



White



Gloss white



ZVI-F55D
(55 x 55 x 9.5 mm)



Flat 55 X1/X2/X4 - Customizable

Backlit capacitive touch switches in Flat 55 family (standard frames 55x55 mm), with flat design and total customization. Flush fitting with Zennio ZS55 frames, switches and sockets.

Anyone can create unique compositions, including images, icons, texts or logos, which are printed on a high strength tempered glass.

There are models with 1, 2 or 4 configurable buttons and backlit icons, which regulate their brightness with the included ambient luminosity sensor and attenuate when the user is not detected by the proximity sensor. Installation in standard mounting box with 55x55 frames of 1/2/3/4 modules (white, gloss white, anthracite or silver). Frame not included.

Accessories: temperature probe and motion sensor.

Available cover options:



Anthracite



Silver



White




Gloss white




ZVI-F55X2
(55 x 55 x 9.5 mm)



ZVI-F55D

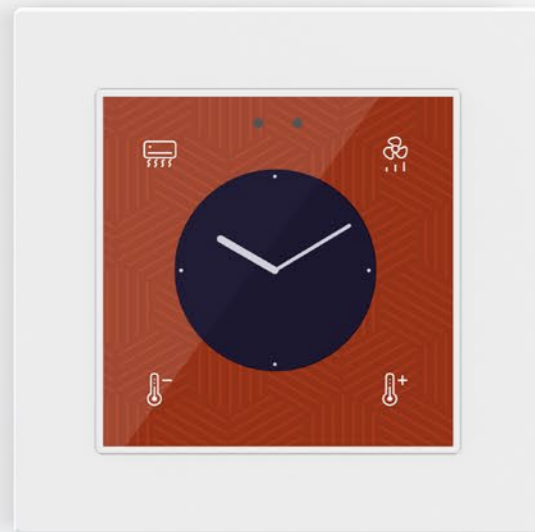


ZVI-F55X1

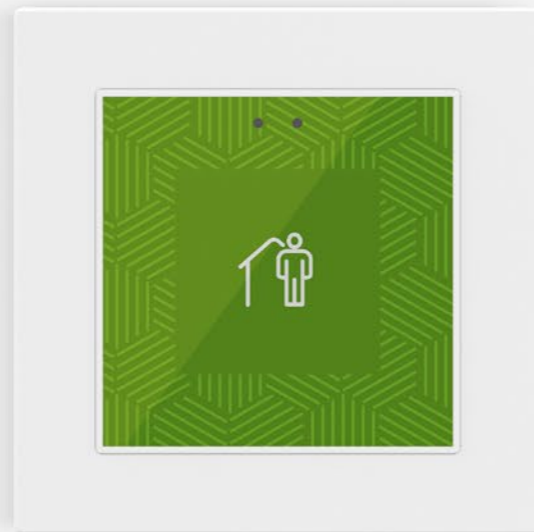


ZVI-F55X2



ZVI-F55X4

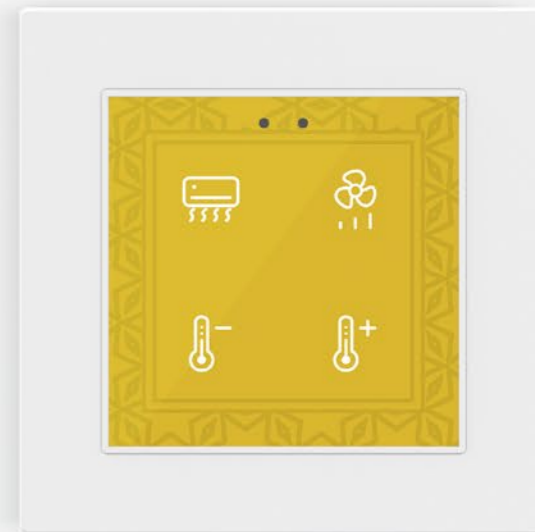

Flat 55 X1/X2/X4 - Standard design

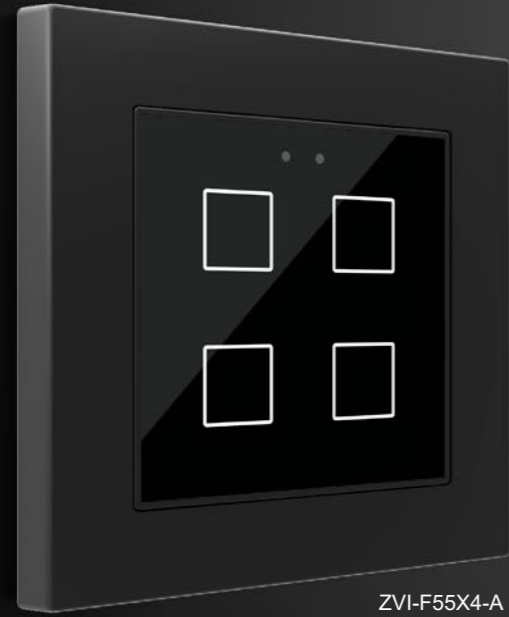

ZVI-F55X4-A
(55 x 55 x 9.5 mm)

Available colors:



Available options:



Presentia W0

Presence detector for in-wall flush mounting into 55x55 mm frame, with a detection area of 180° and up to 10 meters length of detection. Fitting with Tecla 55, Flat 55 family and Zennio ZS55 frames, switches and sockets.

It includes several channels to be configured for lighting switching control according to luminosity threshold or according to presence detection only. It has two independent sensors whose sensitivity settings can be adjusted for each sensor individually. Master/slave configuration allows using several detectors for larger areas. Installation in standard mounting box with 55x55 frames of 1/2/3/4 module. Frame not included.

Available cover options:




Anthracite



Silver



White

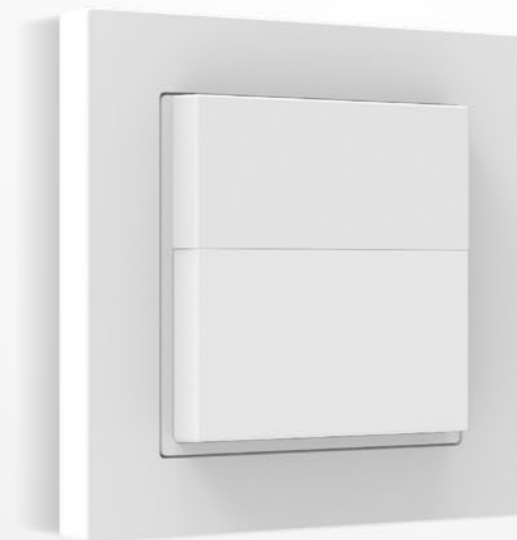

ZPDW0W
(55 x 55 x 16.5 mm)



TMD Display One - Customizable

TMD Display One is a room controller with a 1.8" backlit display that will cause the desired aesthetic impression in any ambience.

Anyone can create unique compositions, which could include images, icons, texts or logos. This customization is printed on a high strength tempered glass.

TMD Display One is able to manage climate, audio, shutters, lights, etc., all through an intuitive and modern touch panel with 8 buttons.

It also includes thermostat function, internal temperature probe and two analog/digital inputs.

Accessories: temperature probes and motion sensor.

Frame options:



Polycarbonate
Anthracite



Polycarbonate
Silver



Polycarbonate
White



Aluminium



Golden



Chrome


Flush-mounted:



Accessory
ZAC-FLTMD



ZVI-TMDD-P
(123 x 90 x 12 mm)

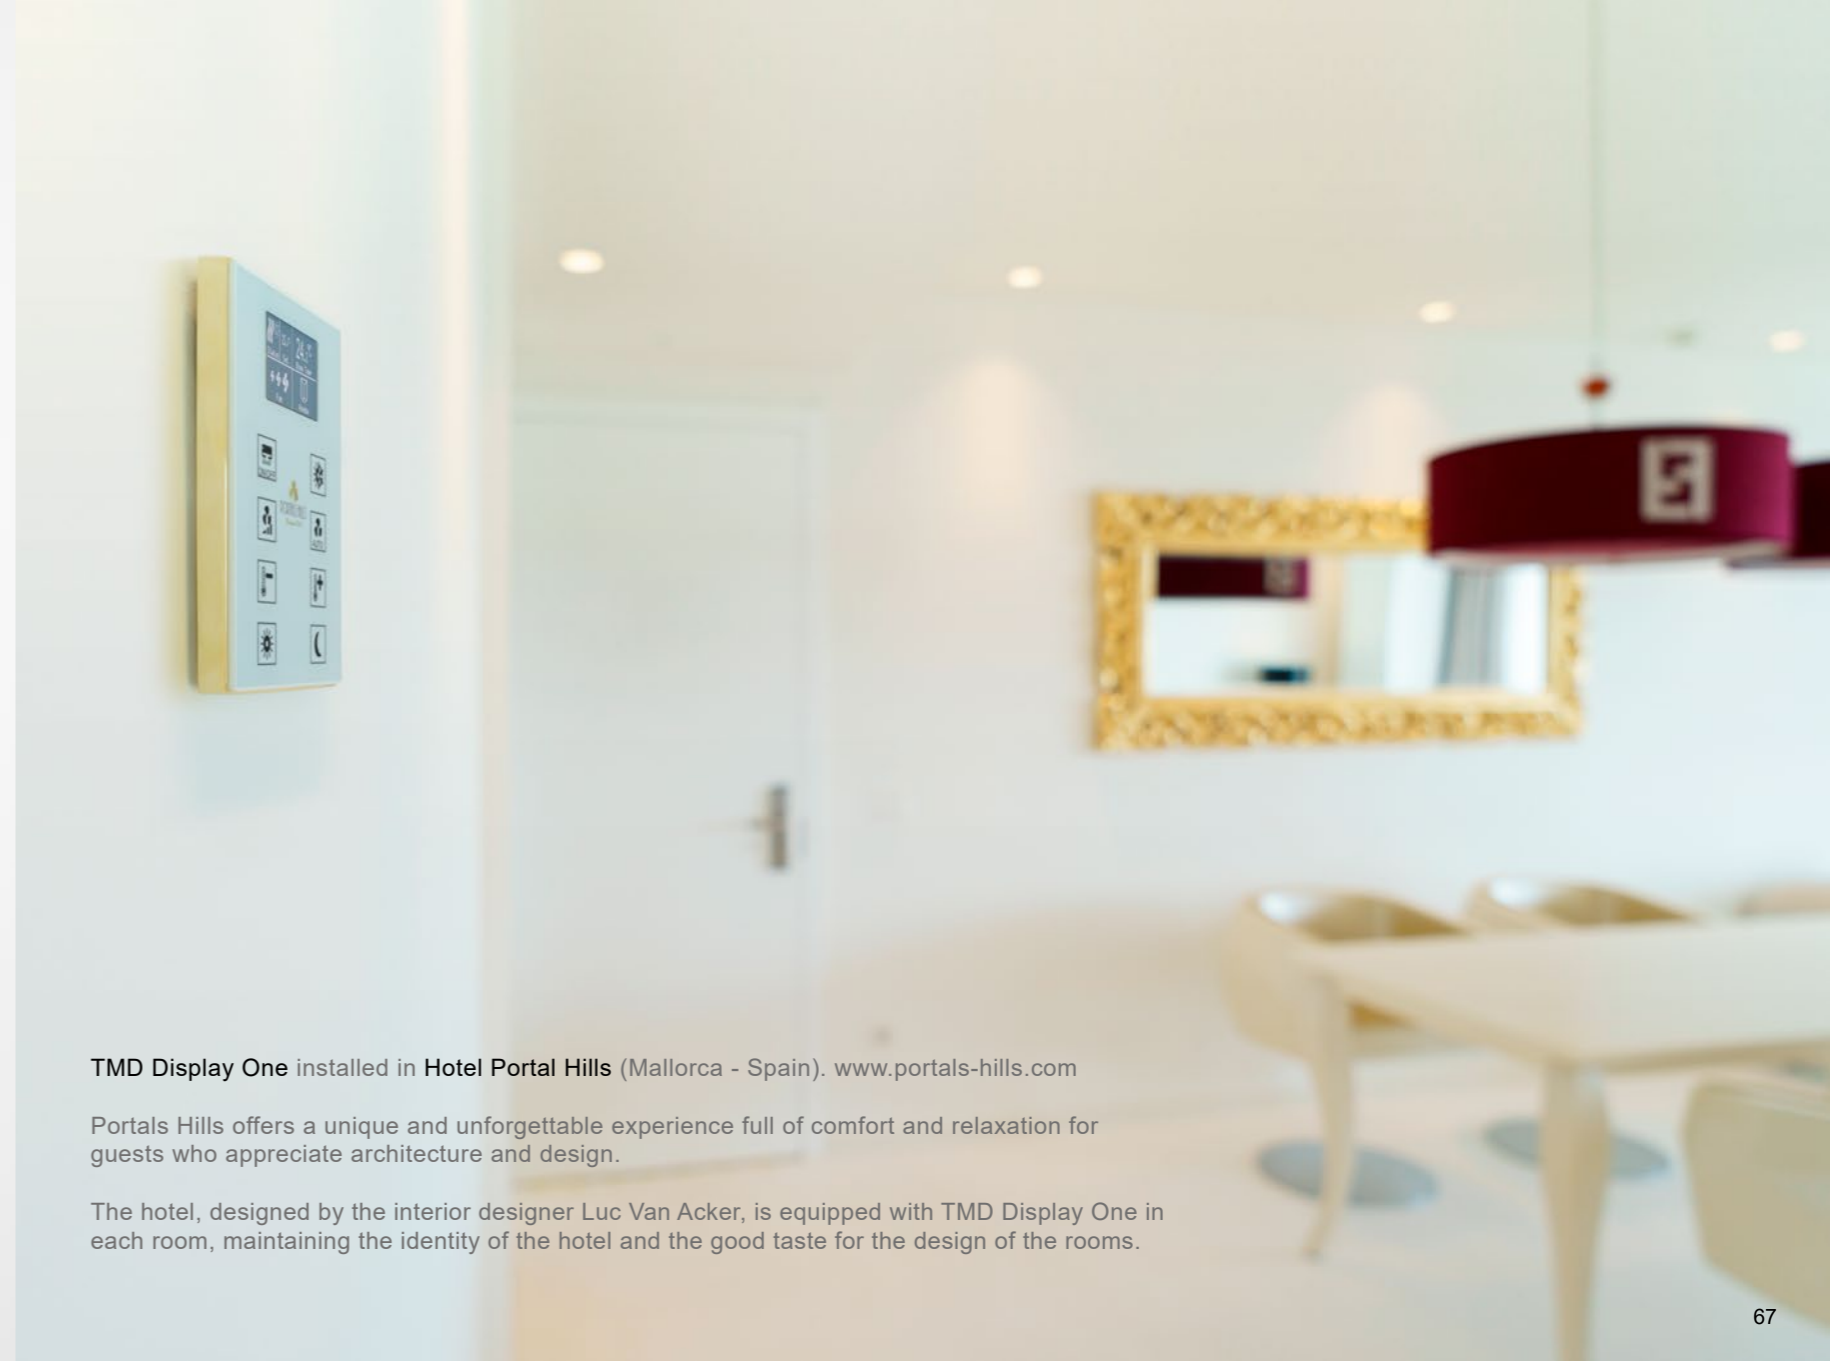

TMD Display One installed in Hotel Portal Hills (Mallorca - Spain). www.portals-hills.com

Portals Hills offers a unique and unforgettable experience full of comfort and relaxation for guests who appreciate architecture and design.


The hotel, designed by the interior designer Luc Van Acker, is equipped with TMD Display One in each room, maintaining the identity of the hotel and the good taste for the design of the rooms.



TMD Display installed at **Panorama Hotel & Resort**
(Island of Sotra – Norway). www.panoramahotell.no

Panorama is a hotel carefully designed and conceived to offer its guests a concept of nature, relaxation and comfort.

The hotel renovated some rooms and equipped them with TMD Display and Square TMD Display for allowing guests to regulate the lighting and temperature of the room, achieving greater comfort.

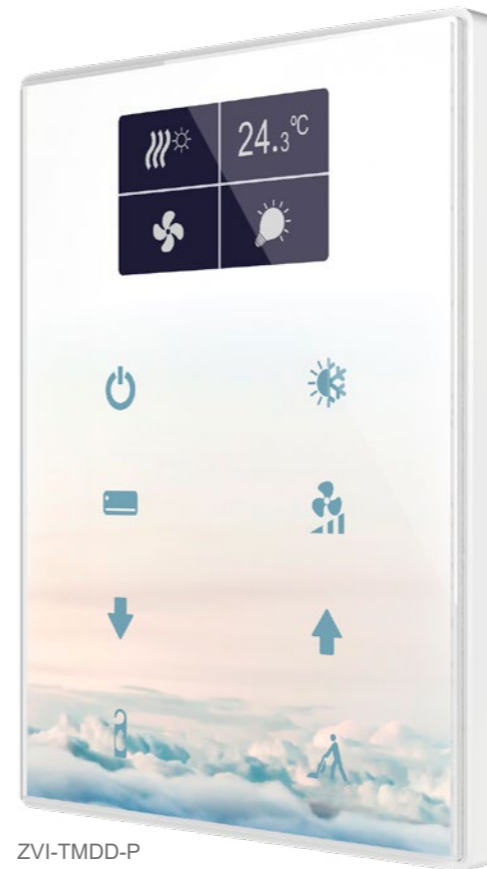

ZVI-TMDD-P
(123 x 90 x 12 mm)



ZVI-TMDD
(123 x 90 x 12 mm)

TMD Display View - Customizable

TMD Display View is a room controller with a 1.8" backlit display that will cause the desired aesthetic impression in any ambience.

It is able to manage climate, audio, shutters, lights, etc., thanks to its 32 functions distributed in up to 4 pages accessible by pressing or sliding on the central area of the panel.

TMD Display View also includes thermostat function, internal temperature probe and two analog/digital inputs for great functionality. Its customization is based on a professional printing on a high strength tempered glass.

Accessories: temperature probes and motion sensor.

Frame options:



Polycarbonate Anthracite



Polycarbonate Silver



Polycarbonate White



Aluminium



Golden




Chrome

Flush-mounted:




Accessory ZAC-FLTMD

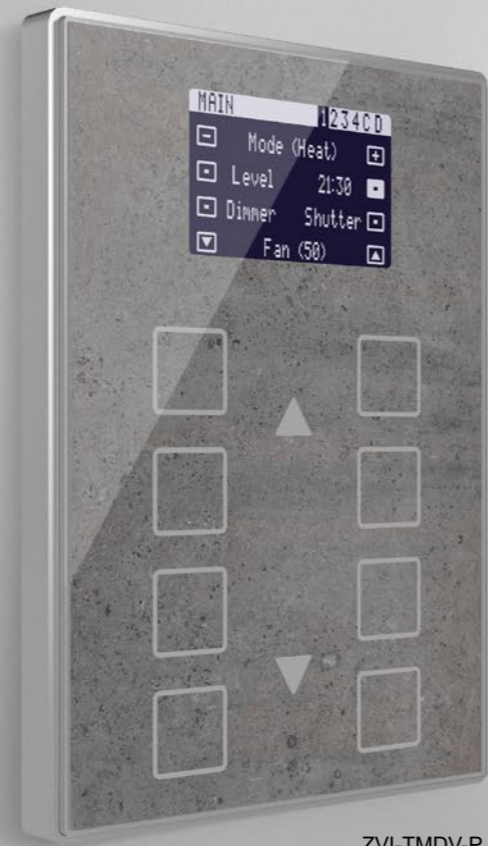

ZVI-TMDV-P
(123 x 90 x 12 mm)



TMD Display View - Standard design

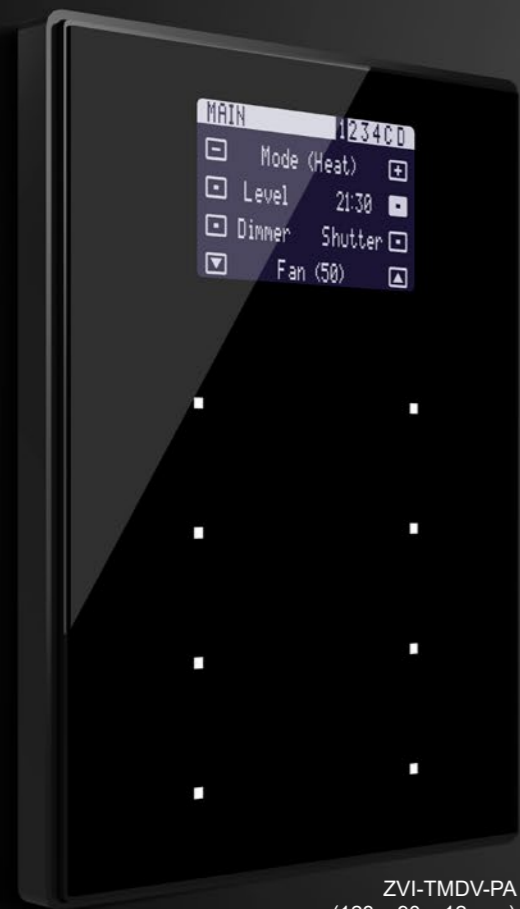

ZVI-TMDV-PA
(123 x 90 x 12 mm)

Available colors:



Available options:



Flush-mounted:



TMD Plus - Customizable

TMD Plus is a KNX switch with capacitive buttons that satisfies the design requirements of any building thanks to its total customization.

Anyone can create unique compositions, which could include images, icons, texts or logos, as well as decide how to install it (portrait or landscape). This customization is printed on a high strength tempered glass.

Available formats of 4, 6 or 8 buttons, so that pairs or individual buttons can be used as personalized controls with LED indicators. TMD Plus has 5 LEDs that can be used as additional buttons to assign direct functions. It also includes thermostat function, internal temperature probe and two analog/digital inputs.

Accessories: temperature probe and motion sensor.

Frame options:



Polycarbonate Anthracite



Polycarbonate Silver



Polycarbonate White



Aluminium



Golden




Chrome

Flush-mounted:



Accessory ZAC-FLTMD

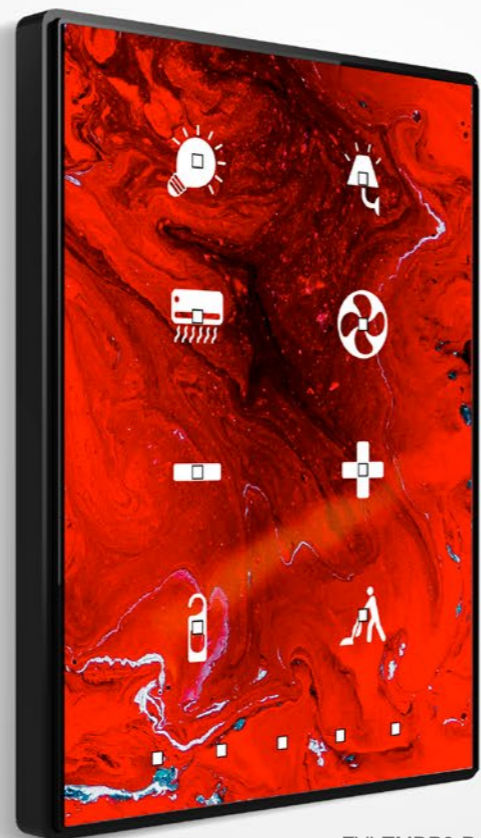

ZVI-TMDP8-P
(123 x 90 x 12 mm)



TMD Plus installed in Hotel Almanac (Barcelona - Spain).
www.almanachotels.com/barcelona

The hotel offers its guests a personalized service of the highest level. With the touch panels located at the entrance and the head of the bed, its clients can adapt the room to their needs to enjoy a memorable experience: Control of air conditioning, lighting, curtains and blackouts, management of housekeeping (DND/MUR) and audio system.




ZVI-TMDP6-P
(123 x 90 x 12 mm)



ZVI-TMDP4-P
(123 x 90 x 12 mm)

TMD Plus - Standard design

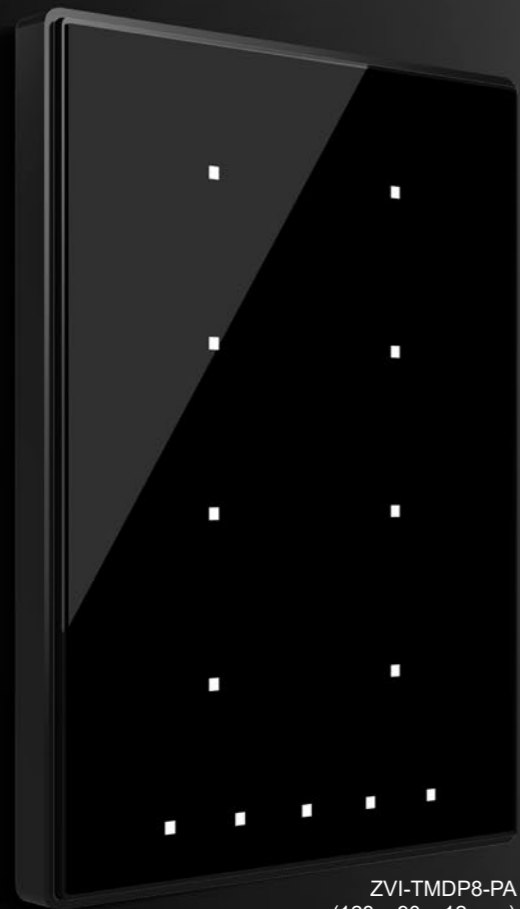

ZVI-TMDP8-PA
(123 x 90 x 12 mm)

Available colors:



Available options:



Flush-mounted:



Tecla 55 X1/X2/X4/X6 - Customizable

New family of polycarbonate capacitive touch switches with customized backlit icons, flush fitting with 55x55 mm Zennio ZS55 switches and sockets.

There are models with 1, 2, 4 or 6 configurable buttons and backlit icons, which regulate their brightness with the included ambient luminosity sensor and attenuate when the user is not detected by the proximity sensor.

Installation in standard mounting box with 55x55 frames of 1/2/3/4 modules. Frame no included.

Accessories: temperature probe.

Available cover options:



Anthracite



Silver




White



ZVIT55X1
(55 x 55 x 9.5 mm)



Tecla 55 - Standard design

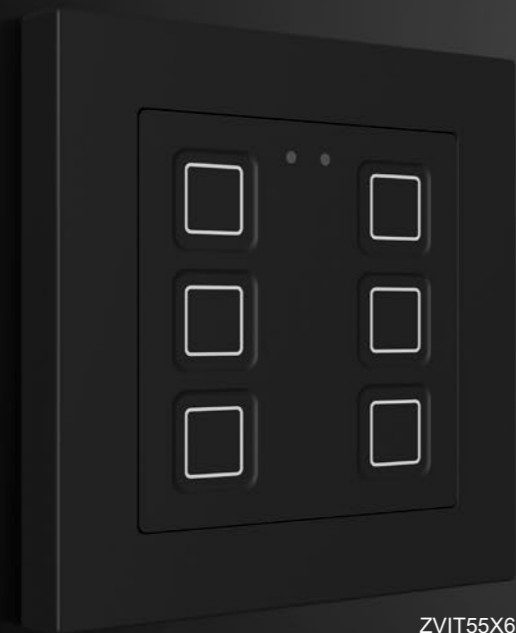

ZVIT55X6
(55 x 55 x 9.5 mm)

Available colors:



Available options:



ZS55 Switches and Sockets

Whole family of 55x55 mm switches and sockets with a flat design. Full integration with Zennio capacitive touch switches and flush fitting with frames.

- Switches: single and double.
- Sockets: schuko, Universal and French.
- USB charger.
- Communication: RJ45, RJ11 and RJ12.
- Multimedia: TV-R, HDMI, Jack 3.5, RCA.
- Blind cover.
- Cable outlet.
- Frames: 1, 2, 3 and 4 modules.

Available colors:



Anthracite



Silver



White



Gloss white




(55 x 55 x 9.5 mm)



Multifunction actuators

Multifunction actuators

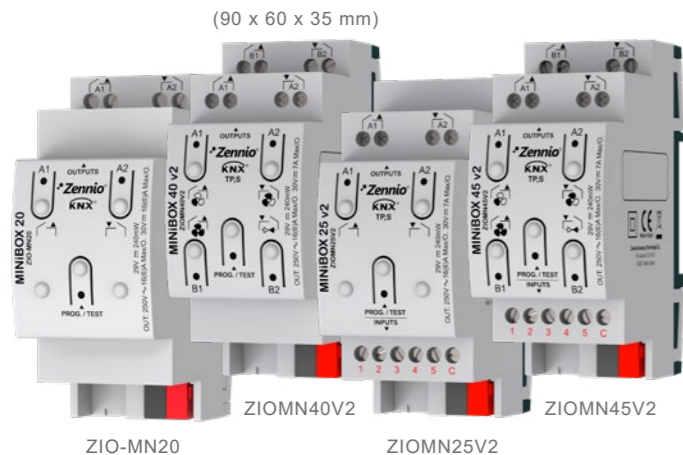

MINiBOX 20 / 40 / 25 / 45

Multifunction actuator for DIN-rail (2 units) with 2/4 outputs (16 A C-load) which offer multiple configurations as shutter channels, individual outputs or even 2-pipes fan coil controller (only ZIOMN40V2 and ZIOMN45V2 models). It allows manual control of its outputs thanks to the push buttons on the cover and includes a logical function module. Models ZIOMN25V2 and ZIOMN45V2 also incorporate 5 analog-digital inputs that may be configured as binary inputs for sensors and potential-free push buttons, as temperature probe inputs or as motion sensor inputs, as well as four room thermostats to control heating/cooling systems. Accessories: Temperature probes, motion sensor and AC/DC shutter adapters.



ZIOMB66V2
(90 x 60 x 80 mm)

MAXiBOX 66

Multifunction sensor-actuator for DIN-rail (4.5 units) with 6 outputs (16 A C-load) which offer multiple configurations as shutter channels or individual outputs. It allows manual control of its outputs thanks to the push buttons on the cover. It includes 10 independent logical functions. In addition, it incorporates 6 analog-digital inputs that may be configured as binary inputs for sensors and potential-free push buttons, as temperature probe inputs or as motion sensor inputs. Four room thermostats to control heating/cooling systems are included. Accessories: Temperature probes, motion sensor and AC/DC shutter adapters.



ZIOIB24V2 (52 x 47 x 28 mm)

inBOX 24

Multifunction actuator for flush mounting with 2 outputs (16 A C-Load) which offer multiple configurations as shutter channel or individual outputs. It allows manual control of its outputs and includes 4 thermostats, 10 independent logical functions and Master-Light function. In addition, it incorporates 4 analog-digital inputs that may be configured as binary inputs for sensors and potential-free push buttons, as temperature probe inputs or as motion sensor inputs. Accessories: Temperature probes, motion sensor and AC/DC shutter adapters.




ZIOIB20V2 (52 x 47 x 28 mm)

inBOX 20

Multifunction actuator for flush mounting with 2 outputs (16 A C-Load) which offer multiple configurations as shutter channel or individual outputs. It allows manual control of its outputs and includes 10 independent logical functions. Accessories: AC/DC shutter adapters.

Multifunction actuators

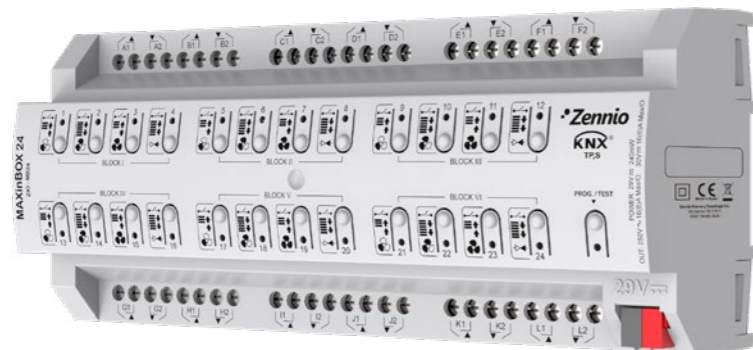


ZIO-MB24 (90 x 60 x 210 mm)

MAXinBOX 24

Multifunction actuator for DIN-rail (12 units) that offers multiple configurations of up to 12 shutter channels, up to 24 independent outputs of 16 A (capacitive loads supported) and up to 6 blocks of 2-pipes fan coil controller. It allows manual control of its outputs thanks to the push buttons on the cover. LED indicators can show the status of its outputs. It includes 30 independent logical functions to enlarge the versatility of the automations in KNX system. Accessories: AC/DC shutter adapters.

MAXinBOX 8

Multifunction actuator for DIN-rail (4.5 units) with 8 outputs (16 A C-Load) which offer multiple configuration as shutter channels, as individual outputs or as blocks of 2-pipes fan coil controller. It allows manual control of its outputs thanks to the push buttons on the cover. It includes 20 independent logical functions. Accessories: AC/DC shutter adapters.

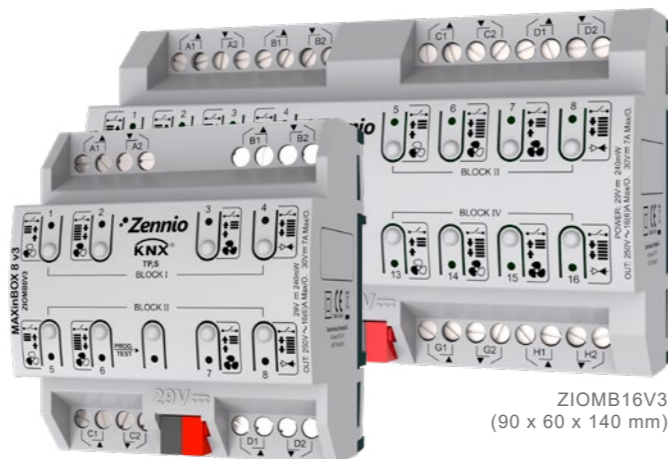

ZIOMB8V3 (90 x 60 x 80 mm)

MAXinBOX 16

Multifunction actuator for DIN-rail (8 units) with 16 outputs (16 A C-Load) which offer multiple configuration as shutter channels, as individual outputs or as blocks of 2-pipes fan coil controller. It allows manual control of its outputs thanks to the push buttons on the cover. It includes 20 independent logical functions. Accessories: AC/DC shutter adapters.

MAXinBOX SHUTTER 8CH



ZIOMBSH8V2 (90 x 60 x 140 mm)

Shutter actuator for DIN-rail (8 units) It includes a module with 20 logical functions and allows manual control of the outputs with status indication through LEDs. Accessories: AC/DC shutter adapters.



ZIOMBSH4V2 (90 x 60 x 80 mm)

MAXinBOX SHUTTER 4CH

Shutter actuator for DIN-rail (4.5 units) It includes a module with 20 logical functions and allows manual control of the outputs with status indication through LEDs. Accessories: AC/DC shutter adapters.



ZAC-SHUC1C (90 x 60 x 35 mm)

Shutter Coupler 1CH

Shutter adapter for DIN-rail (2 units) AC/DC to convert the shutter channel AC output into a DC output to control 12/24 VDC shutters.



ZAC-SHUC2C (90 x 60 x 35 mm)

Shutter Coupler 2CH

Shutter adapter for DIN-rail (2 units) AC/DC to convert up to two shutter channels AC outputs into DC outputs to control 12/24 VDC shutters.

Light dimming

DIMinBOX DX1



ZDIDBDX1
(90 x 60 x 35 mm)

Universal dimming actuator (RLC, LED, CFL*) for DIN-rail (2 units) with 1 channel for up to 350 W at 230 VAC (200 W at 110 VAC). Auto load type detection (RLC). Configurable dimming curves for LED and CFL. It allows manual control of its outputs thanks to the push buttons on the cover. It includes 10 independent logical functions. Error detection: short circuit, voltage surge, overheating, anomalous frequency, power failure, parameterization error. *Only dimmable loads.



ZDI-DBDX2
(90 x 60 x 80 mm)

DIMinBOX DX2

Universal dimming actuator (RLC, LED, CFL*) for DIN-rail (4.5 units): 2 channels for up to 310 W or 1 channel for up to 600 W at 230 VAC (2 channels for up to 200 W or 1 channel for up to 400 W at 230 VAC). Auto load type detection (RLC). Configurable dimming curves for LED and CFL. It allows manual control of its outputs thanks to the push buttons on the cover. It includes 10 independent logical functions. In addition, it incorporates 2 analog-digital inputs that may be configured as binary inputs for sensors and potential-free push buttons, as temperature probe inputs or as motion sensor inputs. Error detection: short circuit, voltage surge, overheating, anomalous frequency, power failure, parameterization error. Accessories: Temperature probes and motion sensor. *Only dimmable loads.

DIMinBOX DX4

Universal dimming actuator (RLC, LED, CFL*) for DIN-rail (8 units) with 4 channels for up to 300 W at 230 VAC (200 W at 110 VAC). It allows double channel connection, up to 600 W at 230 VAC (400 W at 110 VAC) and quad channel connection to control up to 1200 W at 230 VAC (800 W at 110 VAC).

Auto load type detection (RLC). Configurable dimming curves for LED and CFL. It allows manual control of its outputs thanks to the push buttons on the cover. It includes 10 independent logical functions. Error detection: short circuit, voltage surge, overheating, anomalous frequency, power failure, parameterization error. *Only dimmable loads.



ZDIDBDX4 (90 x 60 x 140 mm)



ZDINDX4
(90 x 60 x 80 mm)

NarrowDIM X4

Universal dimming actuator (RLC, LED, CFL*) for DIN-rail (4.5 units) with 4 channels for up to 210 W at 230 VAC (160 W at 110 VAC). It allows double channel connection, up to 400 W at 230 VAC (300 W at 110 VAC) and quad channel connection to control up to 750 W at 230 VAC (600 W at 110 VAC). Auto load type detection (RLC). Configurable dimming curves for LED and CFL. It allows manual control of its outputs thanks to the push buttons on the cover. It includes 10 independent logical functions. Error detection: short circuit, voltage surge, overheating, anomalous frequency, power failure, parameterization error. *Only dimmable loads.



ZDI-RGBDX4
(90 x 60 x 80 mm)

Lumento DX4

LED dimmer with 4 channels (RGBW or single channels) oriented to LED technology with constant voltage regulation and DIN-rail mounting (4.5 units). The dimming channels can be configured as 4 independent channels, 1 RGBW channel or 1 RGB channel + 1 individual channel. It includes 6 analog-digital multifunction inputs that can be configured as binary inputs for sensors and potential-free push buttons or as motion sensor inputs. It has manual test buttons to check the channels functioning. Power supply: 12-30 VDC. Maximum current per channel: 6 A. Accessories: motion sensor.

Light dimming


inBOX DIM

Universal dimmer (RLC, LED, CFL*) for flush mounting with one channel for up to 250 W at 230 VAC (200 W at 110-125 VAC). Auto load type detection (RLC). Configurable dimming curves for LED and CFL. It allows manual control of its outputs thanks to the push buttons on the cover. It includes 10 independent logical functions. In addition, it incorporates 2 analog-digital inputs that may be configured as binary inputs for sensors and potential-free push buttons, as temperature probe inputs or as motion sensor inputs. Error detection: short circuit, voltage surge, overheating, anomalous frequency and power failure. Accessories: Temperature probes and motion sensor. *Only dimmable loads.



ZDI-IBD (52 x 47 x 28 mm)

ZDI-RGBCC3 (144 x 44 x 22 mm)

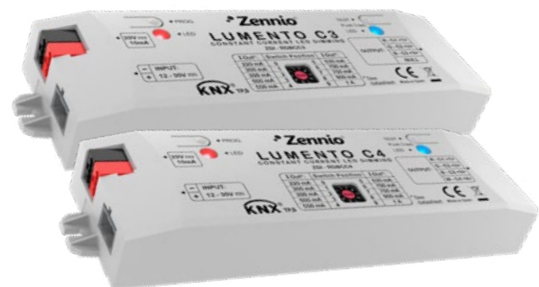

ZDI-RGBCC4 (144 x 44 x 22 mm)

Lumento C3 - Lumento C4

Lumento C3/C4 is a LED Dimmer oriented to LED technology with constant current regulation. It has a manual test button to check the channels functioning. Maximum current selection with parameter and manual selector: 220, 300, 350, 500, 550, 630, 700 or 750, 900 and 1000 mA. Lumento C3: 3 channels that can be configured as 3 independent channels or 1 RGB channel. Lumento C4: 4 channels that can be configured as 4 independent channels, 1 RGBW channel or 1 RGB channel + 1 individual channel.

Lumento X3 - Lumento X4

Lumento X3/X4 is a LED Dimmer oriented to LED technology with constant voltage regulation for 12 to 24 V through pulse width modulation (PWM). It has a manual test button to check the channels functioning. Up to 2.5 A/channel. Lumento X3: 3 channels, configurable as 3 independent channels or 1 RGB channel. Lumento X4: 4 channels, configurable as 4 independent channels or 1 RGBW channel.

ZN1DI-RGBX3 (144 x 44 x 22 mm)



ZN1DI-RGBX4 (144 x 44 x 22 mm)



ZDI-DLB4 (90 x 60 x 80 mm)

KNX-DALI Interface for DIN-rail (4.5 units) to control up to 64 DALI independent ballasts, which can be associated in up to 64 groups. It includes a display and ETS DCA for easily addressing when a ballast is replaced, that also helps assigning ballasts to groups. Error indicators for each ballast.

DALIBOX BROADCAST 4CH

KNX-DALI Broadcast interface for DIN-rail (4.5 units) to control up to 4 channels of up to 20 DALI ballasts with broadcast commands and with up to 10 configurable scenes/sequences for each channel. It allows manual control and status indicator LEDs for each channel.

DALIBOX BROADCAST 6CH


KNX-DALI Broadcast interface for DIN-rail (4.5 units) to control up to 6 channels of up to 20 DALI ballasts with broadcast commands and with up to 10 configurable scenes/sequences for each channel. It allows manual control and status indicator LEDs for each channel.



ZDIDLIV2 (90 x 60 x 80 mm)



ZDI-DLB6 (90 x 60 x 80 mm)

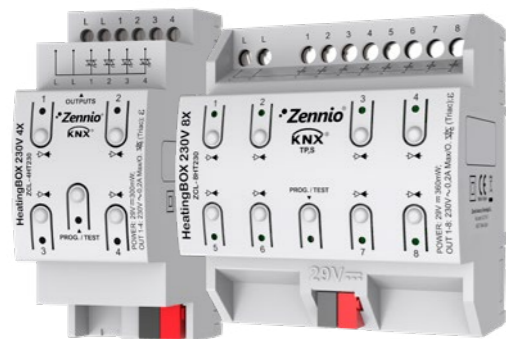

ZCL-4HT230
(90 x 60 x 35 mm)

ZCL-8HT230
(90 x 60 x 80 mm)

HeatingBOX 230V 8X - HeatingBOX 230V 4X

Actuator for climate systems based on water pipes which allows the control of up to 4/8 outputs for on/off valves operated at 230 VAC by means of triacs with short-circuit protection. It includes one independent thermostat for each output and a module with 10 logical functions. It allows manual control of the outputs with status indication through LEDs.



ZCL-4HT24
(90 x 60 x 35 mm)


ZCL-8HT24
(90 x 60 x 80 mm)

HeatingBOX 24V 4X - HeatingBOX 24V 8X

Actuator for climate systems based on water pipes which allows the control of up to 4/8 outputs for on/off valves operated at 24 VAC/DC by means of mosfets with protection against overload/short-circuit. It includes one independent thermostat for each output, furthermore a module with 10 logical functions. It allows manual control of the outputs with status indication through LEDs.

FANinBOX 230V 1CH - FANinBOX 110V 1CH


Ceiling fan controller for fan units powered at 230 VAC or 110 VAC depending on the reference (2 DIN-rail units). It allows the control of up to 3 fan speeds and manual control of outputs with status LED indicators. It includes a module with 10 logical functions and error indicator of power failure.

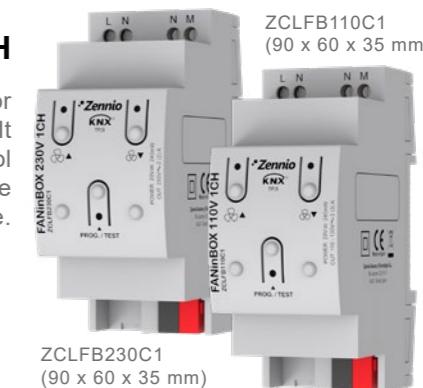

ZCLFB230C1
(90 x 60 x 35 mm)

ZCLFB110C1
(90 x 60 x 35 mm)

ZCL-ZB4 (90 x 60 x 80 mm)

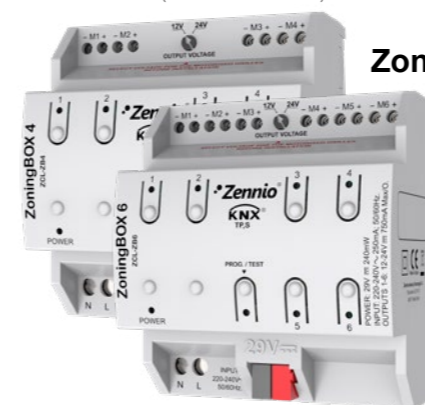

ZCL-ZB6 (90 x 60 x 80 mm)

ZoningBOX 4

ZoningBOX 6

Actuator for DIN-rail (4.5 units) for air conditioning climate systems with zoning. It controls motorized 12/24 VDC grilles in up to 4/6 zones (up to 2 grilles per zone). Temperature management in up to 12 zones with additional ZoningBOX 4/6 modules to activate the additional zones. Management of settings for the air conditioning climate systems (up to two units): on/off, setpoint, mode, fan speed, according to the zones enabled. Manual control of outputs and LED indicators of movement of the grilles.



ZCL2FC2PV2 (90 x 60 x 80 mm) ZCL4FC2PV2 (90 x 60 x 140 mm)

MAXinBOX FANCOIL 2CH2P MAXinBOX FANCOIL 4CH2P

Fan coil controller for DIN-rail (4.5/8 units) of up to 2/4 fan coil units of 2-pipes fan coil. It includes a module with 20 logical functions and allows manual control of the outputs with status indication through LEDs.

MAXinBOX Hospitality

Fan coil controller for 2 or 4-pipes unit with 2-points valves or 3-points valve and up to three fan speeds, for DIN-rail (4.5 units). It includes 2 independent outputs 16 A C-Load, which can be configured as individual outputs or as a shutter channel. Moreover, it has 6 analog-digital multifunction inputs that can be configured as binary inputs for sensors and potential-free push buttons, as temperature probe inputs or as motion sensor inputs. It includes Master Light function, 10 logical functions and allows manual control of the outputs with status indication through LEDs. Accessories: temperature probe and motion sensor.



ZCLHP126V2 (90 x 60 x 80 mm)



ZN1CL-IRSC (45 x 45 x 14 mm)

IRSC - IRSC ZONE

A/C unit control module. IRSC is a KNX infrared air conditioner controller able to manage more than 300 A/C unit models from different manufacturers. IR transmitter included.



ZCL-FC010F (90 x 60 x 80 mm)

MAXinBOX FC 0-10V FAN

Controller for up to two 2-pipes or 4-pipes fan coil units with on/off valves and 0-10 V fan speed control signal. Mounted on DIN-rails (4.5 units). 4 multifunction outputs (16 A C-Load) that can be used for the control of the fan coil on/off valves or any other purpose. 4 analog-digital multifunction inputs that can be configured as binary inputs for sensors and potential-free push buttons, as temperature probe inputs or as motion sensor inputs. It also includes 2 thermostats and 10 logical functions. Manual control of outputs and status indication through LEDs. Accessories: temperature probe and motion sensor.

MAXinBOX FC 0-10V VALVE

Controller for one 2-pipes or 4-pipes fan coil unit with 0-10 V valves. Its 4 outputs (16 A C-load) can be used to control the fan speed or as individual outputs. It has 4 analog-digital multifunction inputs that can be configured as binary inputs for sensors and potential-free push buttons, as temperature probe inputs or as motion sensor inputs. It also includes 2 thermostats, 10 logical functions and allows manual control of the outputs with status indication through LEDs. DIN-rail mounting (4.5 units). Accessories: temperature probe and motion sensor.



ZCL-FC010V (90 x 60 x 80 mm)



ZCLDDV3
(39 x 39 x 14 mm)

KLIC-DD. DAIKIN

KNX bus to residential Daikin interface. KLIC-DD is a bidirectional communication interface for integrating domestic air-conditioning units manufactured by Daikin with KNX. It includes 2 analog-digital inputs for temperature probes, motion sensor or dry contact binary inputs (switches, sensors or push buttons) and 10 logical functions. Accessories: temperature probe and motion sensor.



ZN1CL-KLIC-DI
(90 x 60 x 35 mm)

KLIC-DI. DAIKIN

KNX bus to commercial and industrial Daikin units interface. 2 DIN-rail units. KLIC-DI is a bidirectional communication interface for integrating commercial and industrial air-conditioning units manufactured by Daikin with KNX.



ZN1CL-KLIC-DA
(90 x 60 x 35 mm)

KLIC-DA. DAIKIN

KNX bus to Altherma by Daikin units interface. 2 DIN-rail units. KLIC-DA is a bidirectional communication interface for integrating Altherma units manufactured by Daikin with KNX.



ZCLMITTV2
(39 x 39 x 14 mm)

KLIC-MITTE. MITSUBISHI ELECTRIC

Zennio gateway to control Mitsubishi Electric air conditioning units through IT terminal connector from KNX system in a bidirectional way. It includes 2 analog-digital inputs for temperature probes, motion sensor or dry contact binary inputs (switches, sensors or push buttons) and 10 logical functions. Accessories: temperature probe and motion sensor.

KLIC-MITTE. MITSUBISHI ELECTRIC

Zennio gateway to control Mitsubishi Ecodan hydrobox through IT terminal connector from KNX system in a bidirectional way. It includes 2 analog-digital inputs for temperature probes, motion sensor or dry contact binary inputs (switches, sensors or push buttons) and 10 logical functions.



ZCLMITTE
(39 x 39 x 14 mm)

KLIC-FJ. FUJITSU

Zennio gateway to control Fujitsu, General, Hiyasu and Fuji Electric air conditioning units from KNX system in a bidirectional way. It includes 3 analog-digital inputs for temperature probes, motion sensor or dry contact binary inputs (switches, sensors or push buttons) and 10 logical functions. Accessories: temperature probe and motion sensor.



ZCL-FJ
(39 x 39 x 14 mm)

KLIC-TS. TOSHIBA

Zennio gateway to control Toshiba air conditioning units from KNX system in a bidirectional way. It includes 3 analog-digital inputs for temperature probes, motion sensor or dry contact binary inputs (switches, sensors or push buttons) and 10 logical functions. Accessories: temperature probe and motion sensor.



ZCL-TS
(39 x 39 x 14 mm)

KLIC-PA. PANASONIC

Zennio gateway to control Panasonic air conditioning units from KNX system in a bidirectional way. It includes 3 analog-digital inputs for temperature probes, motion sensor or dry contact binary inputs (switches, sensors or push buttons) and 10 logical functions. Accessories: temperature probe and motion sensor.



ZCLPA
(39 x 39 x 14 mm)

KLIC-LG1. LG

Zennio gateway to control LG air conditioning units from KNX system in a bidirectional way. It includes 3 analog-digital inputs for temperature probes, motion sensor or dry contact binary inputs (switches, sensors or push buttons) and 10 logical functions. Accessories: temperature probe and motion sensor.



ZCL-LG1
(39 x 39 x 14 mm)



ZIO-BIN2X
(39 x 39 x 10.5 mm)

BIN 2X

Universal interface with 2 binary inputs/LED outputs. BIN 2X is a module with 2 configurable channels as binary inputs or LED outputs. Binary inputs can be configured as sensors, switches or potential-free push buttons. Binary outputs can be used for low current LED control. Installation in standard mounting box.

BIN 4X

Universal interface with 4 binary inputs/LED outputs. BIN 4X is a module with 4 configurable channels as binary inputs or LED outputs. Binary inputs can be configured as sensors, switches or potential-free push buttons. Binary outputs can be used for low current LED control. Installation in standard mounting box.



ZIO-BIN4X
(39 x 39 x 10.5 mm)

BIN 44

Universal interface with 4 binary inputs and 4 LED outputs. BIN 44 is a module with 4 binary inputs and 4 LED outputs. Binary inputs can be configured as sensors, switches or potential-free push buttons. Binary outputs can be used for low current LED control. Installation in standard mounting box.



ZIO-BIN44
(39 x 39 x 10.5 mm)



ZIO-QUADP
(39 x 39 x 14 mm)

QUAD Plus

Input module with 4 analog-digital inputs for standard mounting box. Analog/digital inputs can be configured as binary inputs for sensors and potential-free push buttons, as temperature probe inputs or as motion sensor inputs. Four room thermostats for heating/cooling control systems included. Accessories: Temperature probes and motion sensor.

RailQUAD 8

Input module with 8 analog-digital inputs for DIN-rail (2 units). The analog/digital inputs can be configured as binary inputs for sensors and potential-free push buttons, as temperature probe inputs or as motion sensor inputs. Eight room thermostats for heating/cooling control systems included. Accessories: Temperature probes and motion sensor.



ZIO-RQUAD8
(90 x 60 x 35 mm)



ZAC-SQAT-A
(90 x 90 x 12 mm)

SQ-Ambient

This accessory completes the Square family to keep a uniform aesthetics when integrating ambient temperature probes, providing beauty to this technical element. Available options: anthracite, silver and white.



ZPDEZIN
(Ø 58 mm)


EyeZen IN

The motion sensor with infrared detection technology is complemented by an integrated luminosity sensor, which makes the device even more useful. Directly connected to the input of all the Zennio devices that include motion sensor as an option in their inputs module (see the datasheet of the device). Motion detection area can be increased by installing two sensors in parallel to the same input. Easy installation and small size. It does not require any other type of connection or power supply. Available in white and anthracite colors.



Temperature probes

Temperature probes available in steel and epoxy.
Steel: 1.5 m. (-30 °C to 125 °C). ZAC-NTC68S.
Epoxy stiff cable: 2.3 m. (-30 °C to 90 °C). ZAC-NTC68F.
Epoxy: 1.5 m. (-30 °C to 90 °C). ZAC-NTC68E.



ZS-FSEN
(81 x 81 x 9 mm)

Flat Sensato

KNX Humidity and temperature sensor for flush mounting with a flat design. It measures ambient temperature, relative humidity and calculates dew-point, so that it can send alarms for humidity, temperature and condensation. The LED indicator shows the current relative humidity status. It includes 10 logical functions and 2 analog-digital inputs, which can be configured as binary inputs for sensors and potential-free push buttons, as temperature probe inputs or as motion sensor inputs. Available options: anthracite, silver, white and gloss white. Accessories: Temperature probes and motion sensor.

Presence detector with luminosity sensor for ceiling mounting, with a detection area of 360° and up to 6 meters diameter. It includes several channels to be configured for constant luminosity regulation, lighting switching control according to luminosity threshold or according to presence detection only. Sensitivity settings can be adjusted for each sensor individually and luminosity can be calibrated to the working environment values. Master/slave configuration allows using several detectors for larger areas. Flush mounted. Available in white and anthracite colors.

EyeZen TP



ZPDEZTP (Ø 58 mm)



ZPDC30LV2 (Ø 83.5 mm)

Presentia C

Presence detector with luminosity sensor for ceiling mounting, with a detection area of 360° and up to 30 meters diameter. It includes several channels to be configured for constant luminosity regulation, lighting switching control according to luminosity threshold or according to presence detection only. Sensitivity settings can be adjusted for each sensor individually and luminosity can be calibrated to the working environment values. Master/slave configuration allows using several detectors for larger areas. Flush mounted or surface mounted (accessory included).



ZN1CL-IRSC
(45 x 45 x 14 mm)

IRSC-OPEN


IR-KNX Bus unidirectional open protocol interface. IRSC OPEN is a KNX BUS interface that allows control of audio/video consumer electronics via an infrared transmitter. IR transmitter included.



ZN1RX-SKXOPEN
(45 x 45 x 14 mm)

SKX-OPEN / ADVANCE

KNX Bus to RS-232 interface. SKX OPEN is a KNX-RS232 bidirectional communication interface. SKX Open allows integrating external devices with KNX, via an RS232 port. The main feature is the possibility of integrating multiple devices with KNX regardless of the protocol and manufacturer. Configurable RS232 communication control. RS232 cable included.

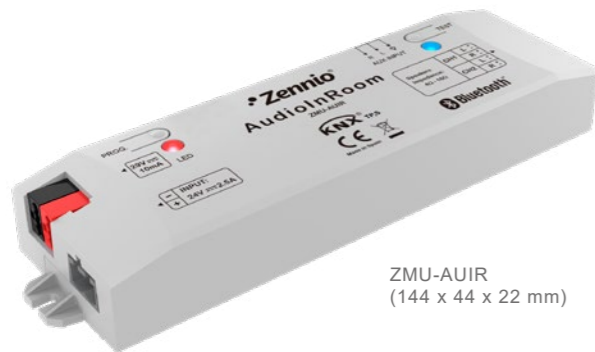

ZMU-AUIR
(144 x 44 x 22 mm)

AudiInRoom

Audio controller for hotel rooms, which allows guests to play music from their own smartphone through Bluetooth® connection or from an auxiliary audio input (such as TV). It has two stereo channels (20 W), so that you can enable/disable, mute or adjust volume in two independent areas. Bluetooth® pairing is restricted with password to make sure the guest is connecting to the audio system in their room. Accessories: loudspeakers Ø 6.5", 8 Ohm or Ø 3.5", 4 Ohm.



ZRX-KCI4S0
(90 x 60 x 35 mm)

KCI

KCI (KNX Consumption Interface) is the Zennio KNX interface for four consumption meters with S0-pulse outputs to monitor their electricity (energy and power), water and/or gas (volume and flow rate) consumption measure in the KNX bus. A removable battery allows buffering S0 pulses during a KNX power failure and recovering the real consumption afterwards. LED indicators make the user able to check the existence of communication through each S0 channel, as well as the battery status (low battery and/or run out of battery), which is also indicated in the KNX bus. DIN-rail mounting device (2 DIN-rail units).

ZN1AC-CST120



ZIO-KESP
(90 x 60 x 35 mm)

KES Plus

Zennio KNX electrical energy meter for single-phase or three-phase systems. It can measure and notify in KNX system, not only the consumed or produced energy (KWh), but also the associated cost according to 6 different tariffs, the CO2 emissions, instant active and reactive power, power factor and other information related with the use of electric energy in the building. Alarms and notifications can be configured as warnings when power exceeds the limits established, for example, to disconnect low priority systems to reduce consumption. In addition, 10 logical functions are added to enlarge the versatility of the automations in KNX system. Only compatible with Zennio Current Transformers
Accessory: Current transformer ZN1AC-CST60 and ZN1AC-CST120.

System devices



ZSYIPRCL
(90 x 70 x 35 mm)

IP Router CL

IP Router CL can be used as line coupler or area coupler with a IP based backbone or main line, through KNXnet/IP Routing protocol. It also allows programming or monitoring a device from the IP network (PC, BMS system...) by using KNXnet/IP Tunnelling protocol (up to 4 connections at the same time). It does not need external power supply nor PoE.



ZSYLCL
(90 x 70 x 35 mm)

Linecoupler CL

Linecoupler is the KNX line coupling and line-repeating solution. It connects lines with galvanic isolation filter. Telegram dropping to reduce traffic.



ZSYKIPI
(90 x 68 x 36 mm)

KIPI

KIPI allows bidirectional communication between Ethernet and a KNX TP installation. It allows addressing, programming or monitoring components located in a KNX TP network from the Ethernet side by using KNXnet/IP Tunneling protocol, with up to 5 parallel connections. It supports extended frames, with a maximum frame length of up to 254 bytes. DIN-rail mounting (2 units). External power supply is not needed.



ZSYUSBSC
(90 x 70 x 35 mm)

KNX USB SC


KNX installations programmer via USB. KNX and USB Status LED. ETS detects the KNX-USB Interface after connecting to the computer. It allows monitoring the KNX bus with ETS.



ZN1PS-160MPA
(90 x 60 x 35 mm)

ZN1PS-160MPA

KNX System Power Supply with additional 29 VDC output. Maximum current 250 mA (up to 160 mA to KNX bus plus additional output consumption). This power supply is ideal for small KNX installations. 230 V~ 50/60 Hz input voltage. Installation in DIN-rail (2 units).

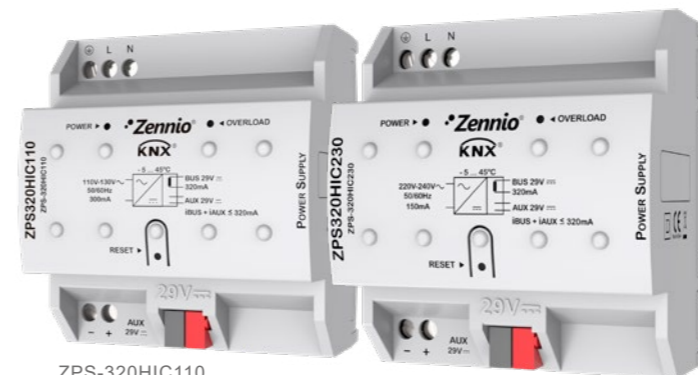


ZPS-320HIC110
(90 x 60 x 80 mm)

ZPS-320HIC230 (90 x 60 x 80 mm)

ZPS320HIC110 ZPS320HIC230

KNX System Power Supply with additional 29 VDC output. Maximum current 320 mA (KNX bus plus additional output consumption). Reset button and overload status LED, short-circuit and overload protection. 230/110 V~ 50/60 Hz input voltage. Installation in DIN-rail (4.5 units).

ZPS-640HIC110
(80 x 90 x 60 mm)

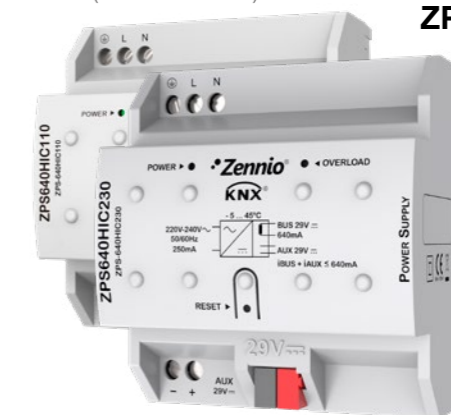

ZPS-640HIC230
(90 x 60 x 80 mm)

ZPS640HIC110

ZPS640HIC230

KNX System Power Supply with additional 29 VDC output. Maximum current 640 mA (KNX bus plus additional output consumption). Reset button and overload status LED, short-circuit and overload protection. 230/110 V~ 50/60 Hz input voltage. Installation in DIN-rail (4.5 units).

System devices

Contact us

Cape Town

100 Upper Canterbury Street
Gardens, Cape Town
Western Cape, 8001
+27 21 464 4661

Johannesburg

Unit 5a Galaxy Park,
Galaxy Road Linbro Park,
Johannesburg
Gauteng, 1401
+27 11 262 5179

Pretoria

Unit 11, Lenchen Park
Lenchen Road South,
Centurion
Gauteng, 0157
+27 12 663 5921

Port Elizabeth

4 Reith Street
Sidwell, Port Elizabeth
Eastern Cape, 6061
+27 41 817 5535

Durban

Unit L, Nandi Park, 34 Brickworks
Way Briardene, Durban
Kwazulu Natal, 4051
+27 31 001 2964

Namibia

Unit 2, Tesoro Building
31 TV More Street
Windhoek
+264 61 400 339

Rest of Africa

Regus Office Space, 1st Floor,
Willowbridge Centre, Carl Cronje
Drive Belville Park, Cape Town
Western Cape, 7530
+27 21 974 6100 (Ext 6131)

Email: info@province.co.za
Website: www.rubiconsa.com

RUBICON
BMS