

LED Track Light Catalogue

RUBICON
LIGHTING



Contents

06 Welcome

07 Track Spot Lights



27 Track Spot Lights AC


31 Track Linear Lights



In a retail outlet, lighting not only makes the products easier to see – it is also a marketing tool. Whether for general visibility or highlighting, light must serve the retailer's objective and ensure the comfort of the customer.

In an environment that has become fiercely competitive, the ambience of retail areas has become a key factor that can influence customers' perception of goods and so induce buying. Besides showing goods to their best advantage, lighting helps to animate the sales area and create a new experience that entices customers to make purchases.

In addition, the place taken by lighting in retailers' operating costs (up to 60% of the electricity consumed) now favours a trend towards more energy-efficient solutions. While reducing energy consumption, LED technology offers a solution that responds particularly well to the requirements of retail lighting: no harm to merchandise (no UV or IR radiated), ranging colour temperatures, and flexibility in the design.



Reform



- FEATURES:
- New Gen-6 COB
 - Passive cooling
 - Tilt and rotate action
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L80B10)

Ordering example: Product Name/CRI/Kelvin/COB/Beam Angle/Luminaire Colour/mA (e.g. Reform/80/30/1206/10/W/700)


Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium	COB 1206 / 1212 S 10° / - NFL 24° / 20° FL 30° / 40° WFL 50° / 60°	○ White ● Black ● Silver



Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux:				Power: 700mA - 850mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
700mA / 25W / 28W	3675Lm	3775Lm	3800Lm	2875Lm	2975Lm	3025Lm	3200Lm	
750mA / 27W / 29W	3875Lm	3975Lm	4025Lm	3075Lm	3150Lm	3200Lm	3350Lm	
800mA / 29W / 31W	4050Lm	4175Lm	4225Lm	3175Lm	3300Lm	3350Lm	3525Lm	
850mA / 31W / 33W	4250Lm	4375Lm	4425Lm	3325Lm	3475Lm	3525Lm	3700Lm	



Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1212 6Gen - COB luminous flux:				Power: 700mA - 850mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
700mA / 23W / 26W	3950Lm	4050Lm	4100Lm	3075Lm	3200Lm	3250Lm	3425Lm	
750mA / 25W / 28W	4200Lm	4300Lm	4350Lm	3275Lm	3400Lm	3450Lm	3650Lm	
800mA / 27W / 30W	4450Lm	4550Lm	4625Lm	3475Lm	3625Lm	3675Lm	3875Lm	
850mA / 29W / 32W	4700Lm	4825Lm	4875Lm	3675Lm	3825Lm	3875Lm	4075Lm	

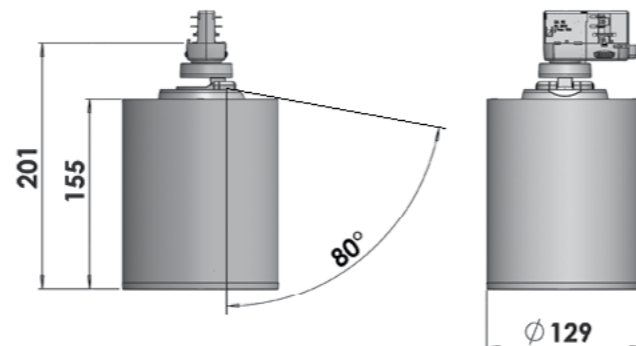

Various Kelvin and CRI options available to suit project requirements

Cafeteria




- FEATURES:
- New Gen-6 COB
 - Passive cooling
 - Tilt and rotate action
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L80B10)

Ordering example: Product Name/CRI/Kelvin/Beam Angle/Luminaire Colour/mA (e.g. Cafeteria/80/30/15/W/500)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium	COB 1206: S 15° NFL 20° FL 30° WFL 50°	○ White ● Black ● Silver



Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux:				Power: 500mA - 850mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
*500mA / 17W / 18W	2725Lm	2775Lm	2825Lm	2125Lm	2200Lm	2250Lm	2350Lm	
*550mA / 19W / 21W	2950Lm	3025Lm	3075Lm	2300Lm	2400Lm	2450Lm	2575Lm	
*600mA / 21W / 23W	3175Lm	3275Lm	3300Lm	2500Lm	2600Lm	2625Lm	2775Lm	
*650mA / 23W / 25W	3400Lm	3500Lm	3525Lm	2675Lm	2755Lm	2800Lm	2975Lm	
**700mA / 25W / 27W	3625Lm	3700Lm	3750Lm	2825Lm	2950Lm	2975Lm	3150Lm	
**750mA / 27W / 29W	3825Lm	3925Lm	3975Lm	3000Lm	3100Lm	3150Lm	3325Lm	
**800mA / 29W / 31W	4025Lm	4125Lm	4175Lm	3150Lm	3275Lm	3325Lm	3500Lm	
**850mA / 31W / 33W	4225Lm	4325Lm	4375Lm	3300Lm	3425Lm	3475Lm	3675Lm	

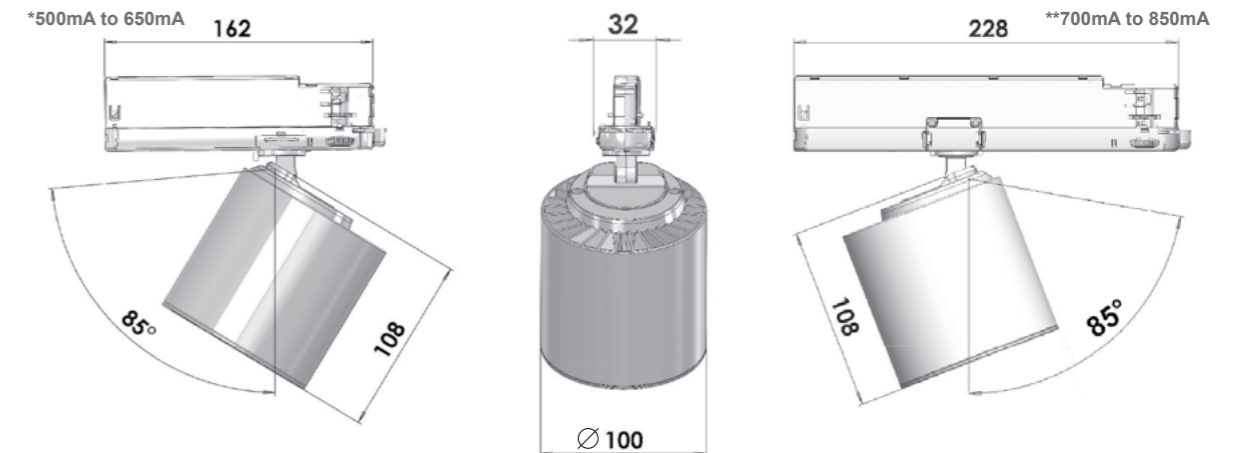

Various Kelvin and CRI options available to suit project requirements

Standard




- FEATURES:**
- New Gen-6 COB
 - Passive cooling
 - Tilt and rotate action
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L80B10)

Ordering example: Product Name/CRI/Kelvin/Beam Angle/Luminaire Colour/mA (e.g. Standard/80/30/15/W/300)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium	COB 1206: S 15° NFL 20° FL 30° WFL 50°	○ White ● Black ● Silver

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux:				Power: 300mA - 850mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
*300mA / 10W / 11W	1725Lm	1775Lm	1800Lm	1325Lm	1375Lm	1400Lm	1475Lm	
*350mA / 12W / 14W	1975Lm	1225Lm	2050Lm	1525Lm	1575Lm	1600Lm	1700Lm	
*400mA / 14W / 16W	2225Lm	2275Lm	2300Lm	1725Lm	1775Lm	1825Lm	1900Lm	
*440mA / 15W / 17W	2400Lm	2475Lm	2500Lm	1875Lm	1950Lm	1975Lm	2075Lm	
*500mA / 17W / 18W	2650Lm	2725Lm	2750Lm	2075Lm	2150Lm	2200Lm	2300Lm	
*550mA / 19W / 21W	2875Lm	2950Lm	3000Lm	2250Lm	2350Lm	2375Lm	2500Lm	
*600mA / 21W / 23W	3100Lm	3200Lm	3225Lm	2425Lm	2525Lm	2550Lm	2700Lm	
*650mA / 23W / 25W	3325Lm	3425Lm	3450Lm	2600Lm	2725Lm	2750Lm	2900Lm	
**700mA / 26W / 27W	3550Lm	3650Lm	3675Lm	2775Lm	2875Lm	2925Lm	3075Lm	
**750mA / 27W / 29W	3750Lm	3850Lm	3875Lm	2925Lm	3050Lm	3100Lm	3250Lm	
**800mA / 28W / 31W	3925Lm	4025Lm	4075Lm	3075Lm	3200Lm	3250Lm	3425Lm	
**850mA / 31W / 33W	4125Lm	4225Lm	4275Lm	3225Lm	3350Lm	3400Lm	3575Lm	

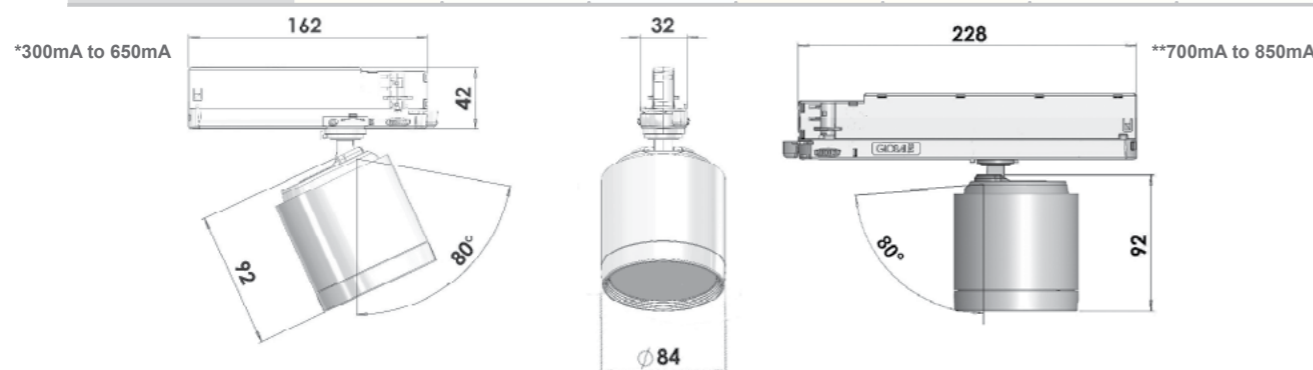

Various Kelvin and CRI options available to suit project requirements

Casa




- FEATURES:**
- New Gen-6 COB
 - Passive cooling
 - Tilt and rotate action
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L80B10)

Ordering example: Product Name/CRI/Kelvin/Beam Angle/Luminaire Colour/mA (e.g. Casa/80/30/15/W/300)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium	COB 1206: S 15° NFL 21° FL 32° WFL 46°	○ White ● Black ● Silver

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux:				Power: 300mA - 750mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
*300mA / 10W / 11W	1675Lm	1725Lm	1750Lm	1300Lm	1350Lm	1375Lm	1450Lm	
*350mA / 12W / 14W	1925Lm	1975Lm	2000Lm	1500Lm	1550Lm	1575Lm	1675Lm	
*400mA / 14W / 16W	2175Lm	2225Lm	2250Lm	1700Lm	1750Lm	1800Lm	1875Lm	
*440mA / 15W / 17W	2350Lm	2425Lm	2450Lm	1850Lm	1925Lm	1950Lm	2050Lm	
*500mA / 17W / 18W	2625Lm	2700Lm	2725Lm	2050Lm	2125Lm	2175Lm	2275Lm	
*550mA / 19W / 21W	2850Lm	2925Lm	2975Lm	2225Lm	2325Lm	2350Lm	2475Lm	
*600mA / 21W / 23W	3075Lm	3200Lm	3175Lm	2400Lm	2500Lm	2525Lm	2675Lm	
*650mA / 23W / 25W	3325Lm	3425Lm	3450Lm	2575Lm	2700Lm	2725Lm	2875Lm	
**700mA / 24W / 27W	3450Lm	3550Lm	3600Lm	2700Lm	2800Lm	2850Lm	3000Lm	
**750mA / 26W / 29W	3650Lm	3750Lm	3800Lm	2825Lm	2925Lm	2975Lm	3150Lm	

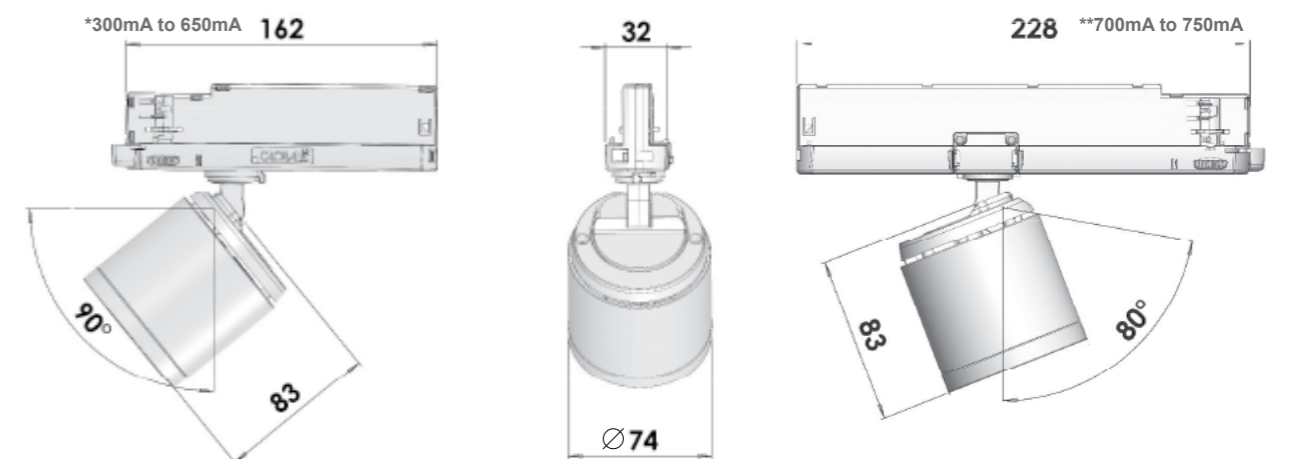

Various Kelvin and CRI options available to suit project requirements

Colt Cylinder




- FEATURES:**
- New Gen-6 COB
 - Passive cooling
 - Tilt and rotate action
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L80B10)

Ordering example: Product Name/CRI/Kelvin/Beam Angle/Luminaire Colour/mA (e.g. ColtCylinder/80/30/15/W/450)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium Thermoplastic Driver Housing	COB 1206: S 15° NFL 20° FL 30° WFL 50°	○ White ● Black ● Grey

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux:				Power: 450mA - 1050mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
450mA / 15W / 17W	2475Lm	2550Lm	2575Lm	1950Lm	2025Lm	2050Lm	2150Lm	
900mA / 32W / 35W	4425Lm	4525Lm	4575Lm	3450Lm	3600Lm	3650Lm	3850Lm	
1050mA / 38W / 42W	4925Lm	5050Lm	5125Lm	3850Lm	4000Lm	4075Lm	4300Lm	

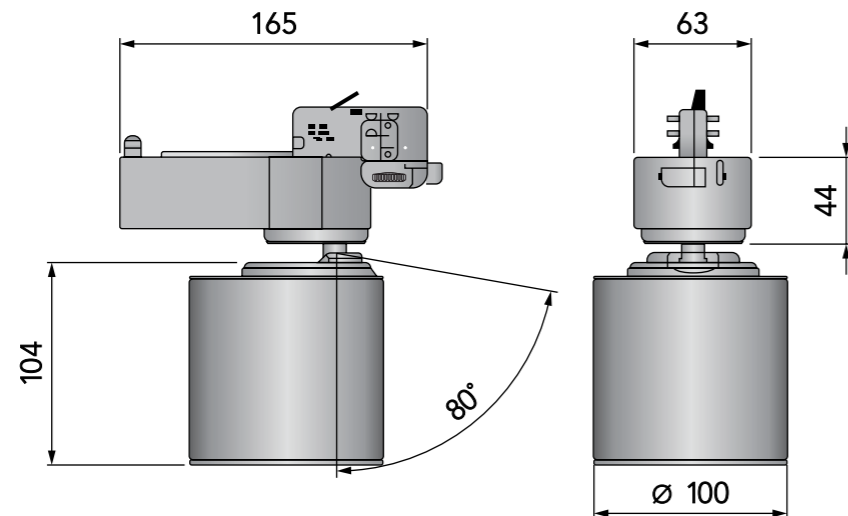

Various Kelvin and CRI options available to suit project requirements

Colt Mini Standard




- FEATURES:**
- New Gen-6 COB
 - Passive cooling
 - Tilt and rotate action
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L80B10)

Ordering example: Product Name/CRI/Kelvin/Beam Angle/Luminaire Colour/mA (e.g. ColtMiniStandard/80/30/15/W/450)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium Thermoplastic Driver Housing	COB 1206: S 15° NFL 20° FL 30° WFL 50°	○ White ● Black ● Grey

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux:				Power: 450mA - 900mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
450mA / 15W / 17W	2425Lm	2500Lm	2525Lm	1900Lm	1975Lm	2000Lm	2125Lm	
650mA / 23W / 25W	3350Lm	3450Lm	3475Lm	2625Lm	2725Lm	2750Lm	2925Lm	
900mA / 32W / 35W	4300Lm	4425Lm	4475Lm	3375Lm	3500Lm	3550Lm	3750Lm	

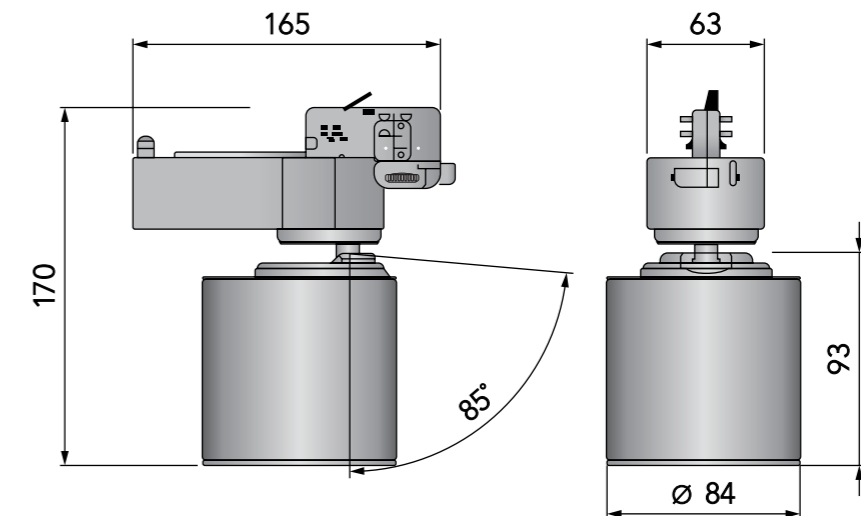

Various Kelvin and CRI options available to suit project requirements

Hub




- FEATURES:**
- New Gen-6 COB
 - Passive cooling
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L80B10)



Ordering example: Product Name/CRI/Kelvin/Beam Angle/Luminaire Colour/mA (e.g. Hub/80/30/15/W/450)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium	COB 1206: S 15° NFL 20° FL 30° WFL 50°	○ White ● Black ● Silver

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux:				Power: 450mA - 1050mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
450mA / 15W / 17W	2475Lm	2550Lm	2575Lm	1950Lm	2025Lm	2050Lm	2150Lm	
900mA / 32W / 35W	4425Lm	4525Lm	4575Lm	3450Lm	3600Lm	3650Lm	3850Lm	
1050mA / 38W / 42W	4925Lm	5050Lm	5125Lm	3850Lm	4000Lm	4075Lm	4300Lm	

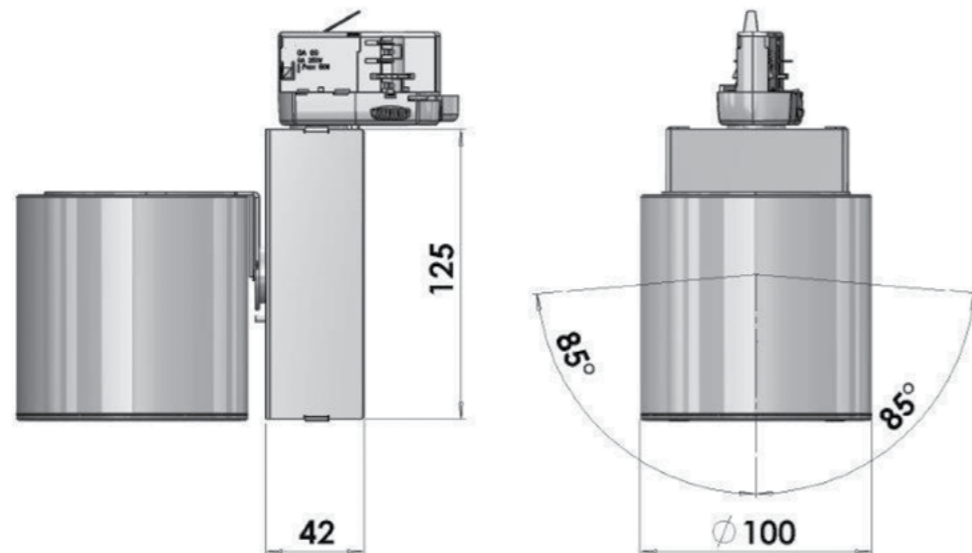

Various Kelvin and CRI options available to suit project requirements

Lean Track



- FEATURES:**
- Gen-5 COB
 - Passive cooling
 - Tilt and rotate action
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L80B10)




Ordering example: Product Name/CRI/Kelvin/COB/Beam Angle/Luminaire Colour/mA (e.g. LeanTrack/80/30/1206/10/W/700)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium	COB 1206 / 1212 S 10°/20° NFL 24° - FL 30°/40° WFL 50°/60°	○ White ● Black ● Silver

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 5Gen - COB luminous flux:				Power: 700mA - 850mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
700mA / 25W / 28W	3575Lm	3675Lm	3725Lm	2725Lm	2825Lm	2875Lm	3050Lm	
750mA / 27W / 29W	3725Lm	3850Lm	3900Lm	2825Lm	2950Lm	3000Lm	3200Lm	
800mA / 29W / 31W	4000Lm	4100Lm	4175Lm	3000Lm	3125Lm	3200Lm	3425Lm	
850mA / 31W / 33W	4175Lm	4300Lm	4375Lm	3150Lm	3300Lm	3350Lm	3550Lm	

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1212 5Gen - COB luminous flux:				Power: 700mA - 850mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
700mA / 24W / 27W	3900Lm	4025Lm	4100Lm	2950Lm	3075Lm	3125Lm	3325Lm	
750mA / 26W / 29W	4150Lm	4300Lm	4350Lm	3125Lm	3250Lm	3325Lm	3525Lm	
800mA / 27W / 30W	4400Lm	4550Lm	4600Lm	3300Lm	3450Lm	3525Lm	3750Lm	
850mA / 29W / 32W	4650Lm	4800Lm	4850Lm	3500Lm	3650Lm	3725Lm	3950Lm	

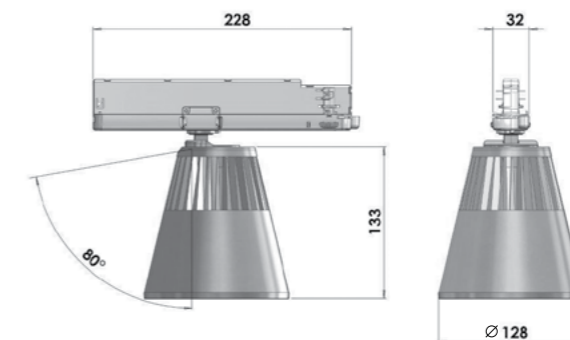

Various Kelvin and CRI options available to suit project requirements

Priority




- FEATURES:**
- New Gen-6 COB
 - Passive cooling
 - Tilt and rotate action
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L80B10)

Ordering example: Product Name/CRI/Kelvin/COB/Beam Angle/Luminaire Colour/mA (e.g. Priority/80/30/1206/10/W/650)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium	COB 1206 / 1212 S 10°/20° NFL 24°/- FL 30°/40° WFL 50°/60°	○ White ● Black ● Silver

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux:				Power: 650mA - 1050mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
650mA / 23W / 25W	3450Lm	3525Lm	3575Lm	2700Lm	2800Lm	2850Lm	3000Lm	
850mA / 31W / 33W	4250Lm	4375Lm	4425Lm	3325Lm	3475Lm	3525Lm	3700Lm	
1050mA / 39W / 43W	5025Lm	5150Lm	5200Lm	3925Lm	4075Lm	4150Lm	4350Lm	

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1212 6Gen - COB luminous flux:				Power: 650mA - 1400mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
650mA / 22W / 25W	3700Lm	3800Lm	3825Lm	2900Lm	3000Lm	3050Lm	3225Lm	
1050mA / 36W / 40W	5625Lm	5775Lm	5850Lm	4400Lm	4575Lm	4650Lm	4900Lm	
1400mA / 49W / 55W	7050Lm	7225Lm	7325Lm	5525Lm	5750Lm	5825Lm	6125Lm	

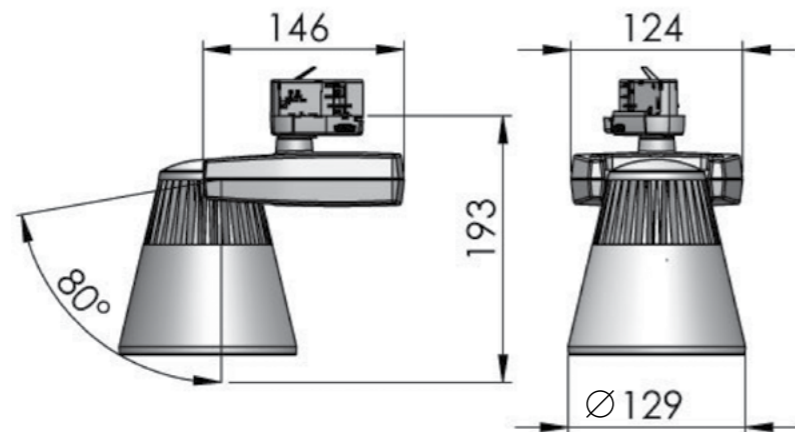

Various Kelvin and CRI options available to suit project requirements

Mini Priority




- FEATURES:**
- New Gen-6 COB
 - Passive cooling
 - Tilt and rotate action
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L80B10)

Ordering example: Product Name/CRI/Kelvin/Beam Angle/Luminaire Colour/mA (e.g. MiniPriority/80/30/15/W/450)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium	COB 1206: S 15° NFL 20° FL 30° WFL 50°	○ White ● Black ● Silver

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux:				Power: 450mA - 900mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
450mA / 15W / 17W	2425Lm	2500Lm	2525Lm	1900Lm	1975Lm	2000Lm	2125Lm	
650mA / 23W / 25W	3350Lm	3450Lm	3475Lm	2625Lm	2725Lm	2750Lm	2925Lm	
900mA / 32W / 35W	4300Lm	4425Lm	4475Lm	3375Lm	3500Lm	3550Lm	3750Lm	

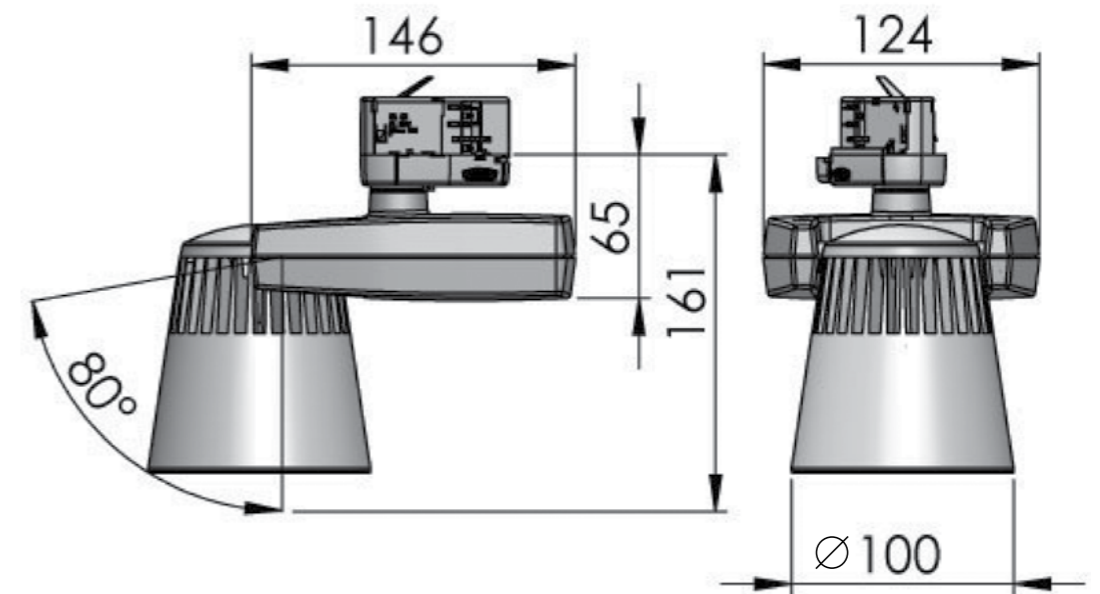

Various Kelvin and CRI options available to suit project requirements

Bandit




- FEATURES:**
- New Gen-6 COB
 - Passive cooling
 - Tilt and rotate action
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L80B10)

Ordering example: Product Name/CRI/Kelvin/COB/Beam Angle/Luminaire Colour/mA (e.g. Bandit/80/30/1206/10/W/650)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium	COB 1206 / 1212 S 10°/20° NFL 24° - FL 30°/40° WFL 50°/60°	○ White ● Black ● Silver

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux:				Power: 650mA - 1050mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
650mA / 23W / 25W	3450Lm	3525Lm	3575Lm	2700Lm	2800Lm	2850Lm	3000Lm	
950mA / 33W / 35W	4450Lm	4575Lm	4625Lm	3500Lm	3625Lm	3675Lm	3875Lm	
1050mA / 39W / 43W	5025Lm	5150Lm	5200Lm	3925Lm	4075Lm	4150Lm	4350Lm	

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1212 6Gen - COB luminous flux:				Power: 650mA - 1400mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
650mA / 22W / 25W	3700Lm	3800Lm	3825Lm	2900Lm	3000Lm	3050Lm	3225Lm	
1050mA / 36W / 40W	5625Lm	5775Lm	5850Lm	4400Lm	4575Lm	4650Lm	4900Lm	
1400mA / 49W / 55W	7050Lm	7225Lm	7325Lm	5525Lm	5750Lm	5825Lm	6125Lm	

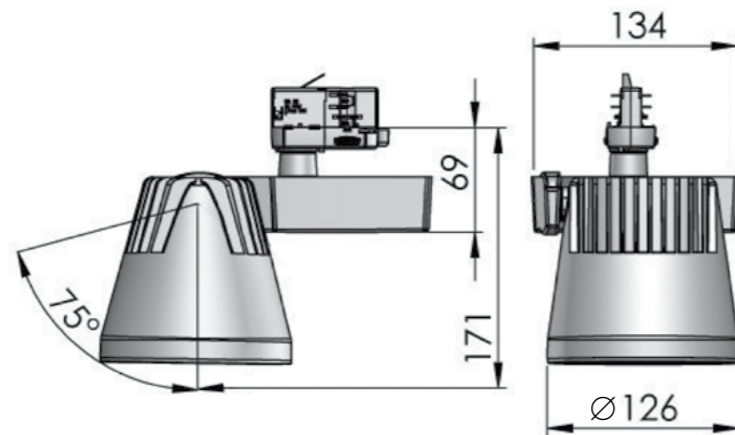

Various Kelvin and CRI options available to suit project requirements

Colt Lean




- FEATURES:**
- New Gen-6 COB
 - Passive cooling
 - Tilt and rotate action
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L80B10)

Ordering example: Product Name/CRI/Kelvin/COB/Beam Angle/Luminaire Colour/mA (e.g. ColtLean/80/30/1206/10/W/650)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium Thermoplastic Driver Housing	COB 1206 / 1212 S 10°/20° NFL 24° - FL 30°/40° WFL 50°/60°	○ White ● Black ● Grey

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux:				Power: 650mA - 1050mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
650mA / 23W / 25W	3450Lm	3525Lm	3575Lm	2700Lm	2800Lm	2850Lm	3000Lm	
900mA / 33W / 35W	4450Lm	4575Lm	4625Lm	3500Lm	3625Lm	3675Lm	3875Lm	
1050mA / 39W / 43W	5025Lm	5150Lm	5200Lm	3925Lm	4075Lm	4150Lm	4350Lm	

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1212 6Gen - COB luminous flux:				Power: 650mA - 1400mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
650mA / 22W / 25W	3700Lm	3800Lm	3825Lm	2900Lm	3000Lm	3050Lm	3225Lm	
1050mA / 36W / 40W	5625Lm	5775Lm	5850Lm	4400Lm	4575Lm	4650Lm	4900Lm	
1400mA / 49W / 55W	7050Lm	7225Lm	7325Lm	5525Lm	5750Lm	5825Lm	6125Lm	

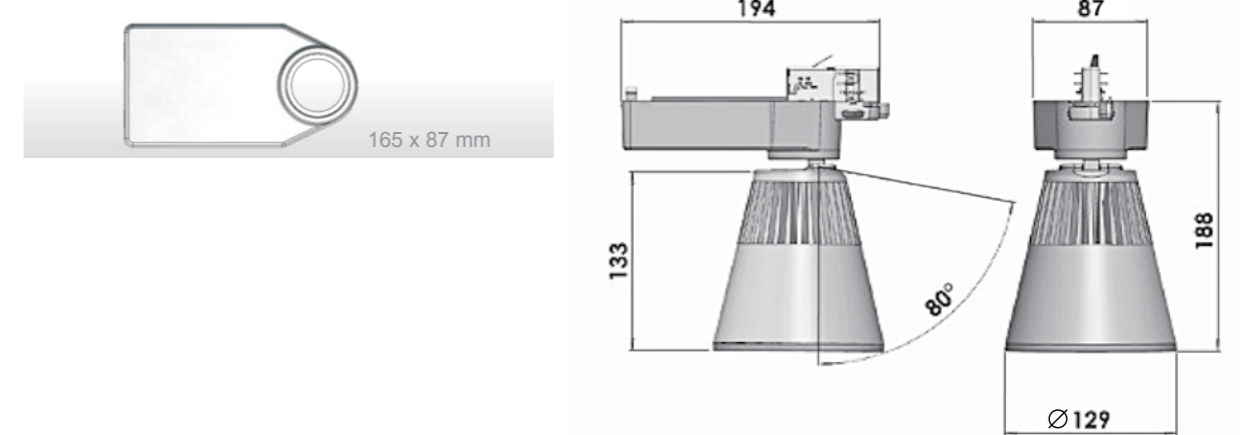

Various Kelvin and CRI options available to suit project requirements

Mini Lean




- FEATURES:
- New Gen-6 COB
 - Passive cooling
 - Tilt and rotate action
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L80B10)

Ordering example: Product Name/CRI/Kelvin/Beam Angle/Luminaire Colour/mA (e.g. MiniLean/80/30/15/W/450)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium	COB 1206: S 15° NFL 20° FL 30° WFL 50°	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Silver

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux:				Power: 450mA - 900mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
450mA / 15W / 17W	2425Lm	2500Lm	2525Lm	1900Lm	1975Lm	2000Lm	2125Lm	
650mA / 23W / 25W	3350Lm	3450Lm	3475Lm	2625Lm	2725Lm	2750Lm	2925Lm	
900mA / 32W / 35W	4300Lm	4425Lm	4475Lm	3375Lm	3500Lm	3550Lm	3750Lm	

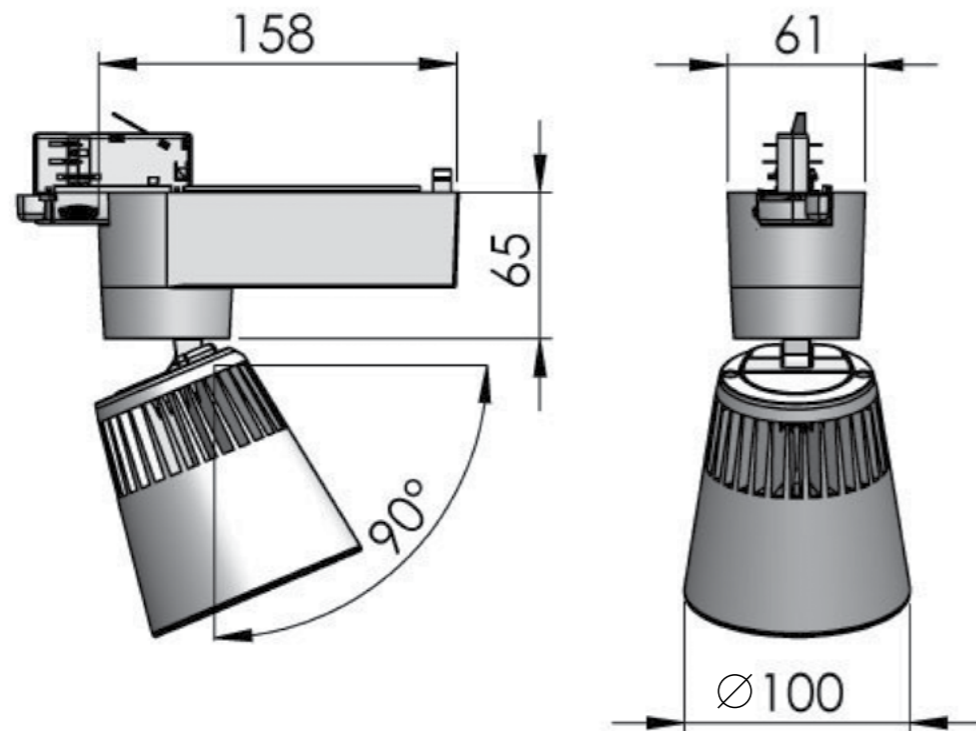

Various Kelvin and CRI options available to suit project requirements

Art



- FEATURES:
- New Gen-6 COB
 - Ultra slim driver
 - Balanced for suspension
 - Minimum lumen maintenance: 50 000h (L80B10)

Ordering example: Product Name/CRI/Kelvin/COB/Beam Angle/Luminaire Colour/mA (e.g. Art/80/30/1206/10/W/650)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	3-Phase Track	Powder Painted Die-cast Aluminium	COB 1206 S 15° NFL 20° FL 30° WFL 50°	<input type="radio"/> White (W) <input type="radio"/> Black (B) <input type="radio"/> Silver (S)

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux:				Power: 650mA - 850mA			
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K	
650mA / 23W / 25W	3350Lm	3425Lm	3475Lm	2650Lm	2750Lm	2800Lm	2950Lm	
850mA / 31W / 33W	4175Lm	4305Lm	4340Lm	3255Lm	3400Lm	3535Lm	3780Lm	


LUMINAIRE COLOUR OPTIONS:



KELVIN OPTIONS:

2000K | 2400K | 2700K | 3000K | 3500K | 4000K | 5000K

DIMENSIONS:

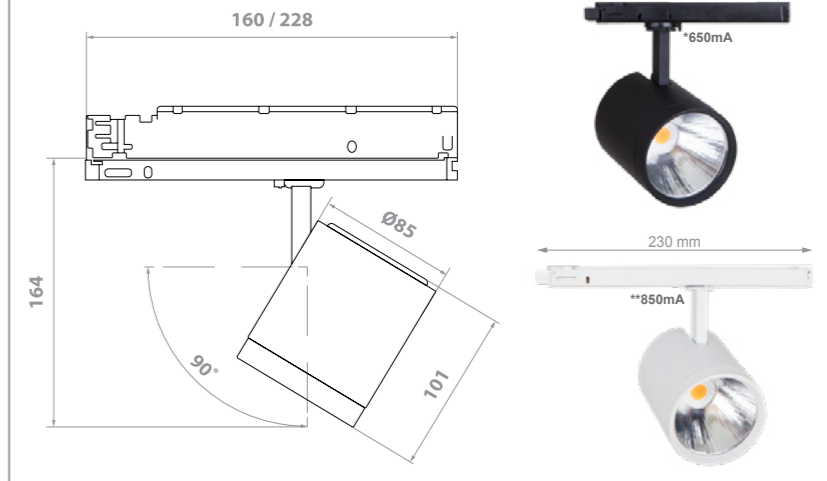

Various Kelvin and CRI options available to suit project requirements

Craft Pendant



- FEATURES:**
- New Gen-6 COB
 - Minimum lumen maintenance: 50 000h (L80B10)
 - Passive cooling
 - DALI compatible

Ordering example: Product Name/CRI/Kelvin/COB/Mounting/Beam Angle/Luminaire Colour/mA (e.g. CraftP/80/30/1206/CS/10/W/1050)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+ Vivid Natural / Vivid Brilliant Meat / Bakery / Fish / Fruit / Vegetable	2-Step MacAdam	Ceiling Suspension (CS) Track Suspension (TS)	Powder Painted Die-cast Aluminium	COB 1206 / 1212 S 10°/20° NFL 24° / - FL 30°/40° WFL 50°/60°	○ White (W) ● Black (B) ● Silver (S)


Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1206 6Gen - COB luminous flux: Power: 650mA - 1050mA						
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K
650mA / 23W / 25W	3450Lm	3525Lm	3575Lm	2700Lm	2800Lm	2850Lm	3000Lm
950mA / 33W / 35W	4450Lm	4575Lm	4625Lm	3500Lm	3625Lm	3675Lm	3875Lm
1050mA / 39W / 42W	5000Lm	5150Lm	5200Lm	3925Lm	4075Lm	4150Lm	4350Lm

Output Current / Module Wattage / Luminaire Wattage:	LED Module: 1212 6Gen - COB luminous flux: Power: 650mA - 1400mA						
	CRI 80+ 3000K	CRI 80+ 4000K	CRI 80+ 5000K	CRI 90+ 2700K Below BBL	CRI 90+ 3000K Below BBL	CRI 90+ 3500K Below BBL	CRI 90+ 4000K
650mA / 22W / 25W	3700Lm	3800Lm	3825Lm	2900Lm	3000Lm	3050Lm	3225Lm
1050mA / 36W / 40W	5205Lm	5775Lm	5850Lm	4400Lm	4575Lm	4650Lm	4900Lm
1400mA / 49W / 55W	7050Lm	7225Lm	7325Lm	5525Lm	5750Lm	5825Lm	6125Lm

LUMINAIRE COLOUR OPTIONS:



DIMENSIONS:

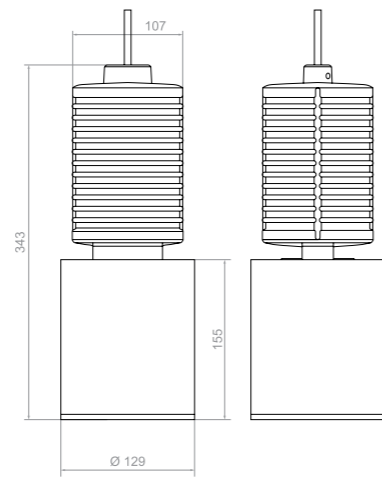

KELVIN OPTIONS:

- 2000K
- 2400K
- 2700K
- 3000K
- 3500K
- 4000K
- 5000K

Various Kelvin and CRI options available to suit project requirements

Navo NSK DDF




- FEATURES:**
- Double asymmetrical luminaire
 - With integral reflector DDF-NB or DDF-NX
 - Interchangeable reflectors

Ordering example: Product Name/CRI/Reflector/Luminaire Colour/W (e.g. NavoNSKDDF/830/NB/W/70)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Reflector	Luminaire Colour
220 - 240V	Custom Retail Colour Chip	2-Step MacAdam	3 Circuit Track	Aluminium	NB and NX Reflectors	○ White ● Anthracite ● Silver

CRI Light Colour	Lumen category	Wattage (system)	Efficiency	DDF-NB	DDF-NX
830	8000 Lm	70W	116Lm/W		
	12000 Lm	100W	118Lm/W		
840 927	Photometric data on request				

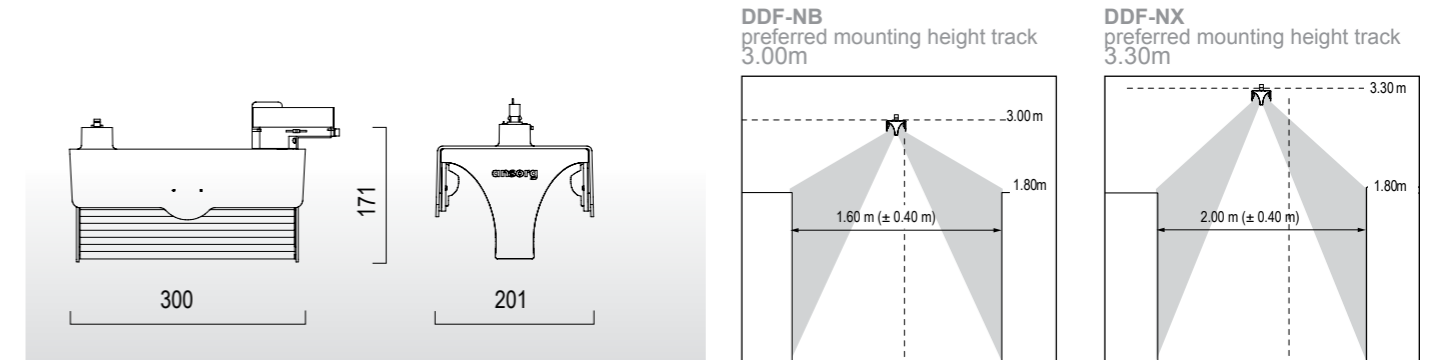

Various Kelvin and CRI options available to suit project requirements




Navo NSK DF



- FEATURES:
- Asymmetrical Luminaire
 - With integral reflector DF-NB or DF-NX
 - Interchangeable reflectors

Ordering example: Product Name/CRI/Reflector/Luminaire Colour/W (e.g. NavoNSKDF/830/NB/W/35)

Reflector	Luminaire Colour	CRI Light Colour	Lumen category	Wattage (system)	Efficiency
NB and NX Reflectors	<input type="radio"/> White <input checked="" type="radio"/> Anthracite <input type="radio"/> Silver	830	4000 Lm	35W	116Lm/W
			6000 Lm	50W	118Lm/W
		840 927	Photometric data on request		

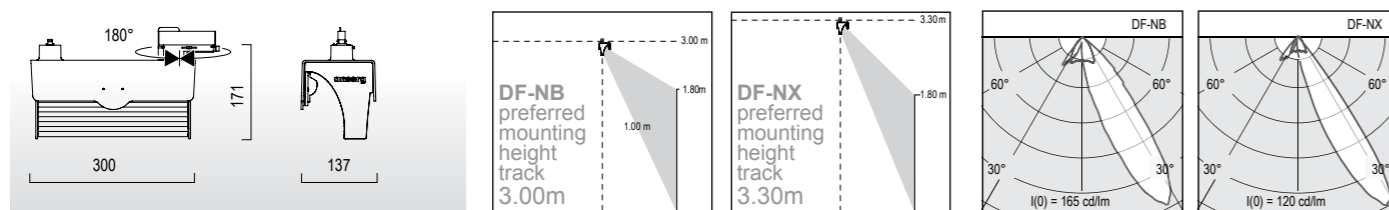



Navo NSW



- FEATURES:
- Asymmetrical Luminaire
 - With integral reflector WW

Ordering example: Product Name/CRI/Reflector/Luminaire Colour/W (e.g. NavoNSW/830/WW/W/35)

Reflector	Luminaire Colour	CRI Light Colour	Lumen category	Wattage (system)	Efficiency
WW Reflectors	<input type="radio"/> White <input checked="" type="radio"/> Anthracite <input type="radio"/> Silver	830	4000 Lm	35W	116Lm/W
			6000 Lm	50W	118Lm/W
		840 927	Photometric data on request		

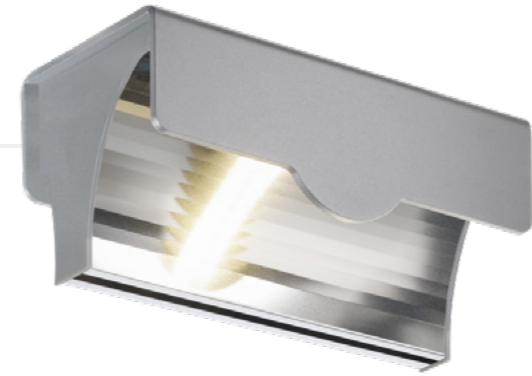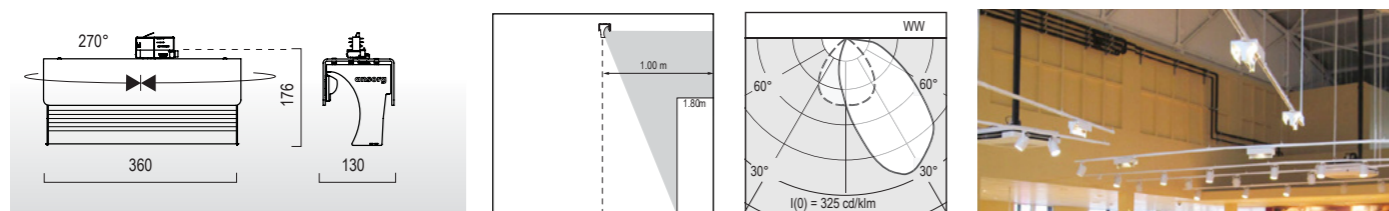

Lival Bingo




- FEATURES:
- Passive cooling
 - Aluminium housing
 - 50,000H (L80B10)

Ordering example: Product Name/CRI/Kelvin/Beam Angle/Luminaire Colour (e.g. LivalLift/34/42/W)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 83+ / CRI 92+ / CRI 97+	2-Step MacAdam	Recessed, Ceiling Mounted Luminaire	Powder Painted Die-Cast Aluminium	Spot Narrow Flood Flood Wide Flood	<input type="radio"/> White <input checked="" type="radio"/> Silver <input type="radio"/> Black

COB luminous flux:				
CODE	CRI	K	W (system)	Lm
LivalBingo27	97+	3500K	27W	2250Lm
LivalBingo34	97+	4000K	34W	2625Lm

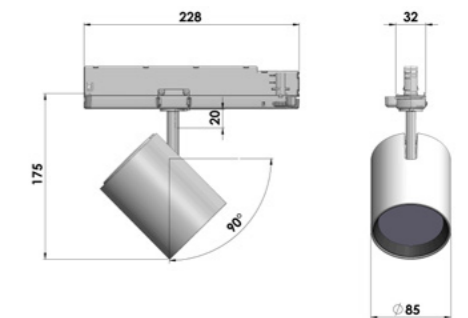

* Various Kelvin and CRI options available to suit project requirements

Lival Dingo




- FEATURES:
- Passive cooling
 - Aluminium housing
 - 50,000H (L80B10)

Ordering example: Product Name/CRI/UGR<19/Kelvin/Beam Angle/Luminaire Colour (e.g. LivalDingo/27/34/W)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 83+ / CRI 92+ / CRI 97+	2-Step MacAdam	Recessed, Ceiling Mounted Luminaire	Powder Painted Die-Cast Aluminium	Spot Narrow Flood Flood Wide Flood	<input type="radio"/> White <input checked="" type="radio"/> Silver <input type="radio"/> Black

COB luminous flux:				
CODE	CRI	K	W (system)	Lm
LivalDingo27	97+	3500K	27W	2250Lm
LivalDingo34	97+	4000K	34W	2600Lm

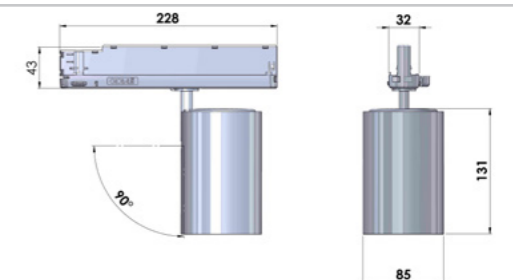

Lival Bing




- FEATURES:
- Passive cooling
 - Aluminium housing
 - 50,000H (L80B10)

Ordering example: Product Name/CRI/UGR<19/Kelvin/Beam Angle/Luminaire Colour (e.g. LivalBing/19/25/W/S/B)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 83+ / CRI 92+ / CRI 97+	2-Step MacAdam	Recessed, Ceiling Mounted Luminaire	Powder Painted Die-Cast Aluminium	Spot Narrow Flood Flood Wide Flood	<input type="radio"/> White <input type="radio"/> Silver <input type="radio"/> Black

COB luminous flux:				
CODE	CRI	K	W (system)	Lm
LivalBing19	97+	3500K	19W	1725Lm
LivalBing25	97+	4000K	25W	2175Lm

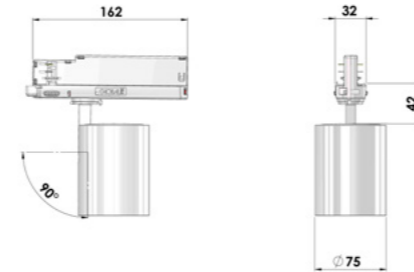

Track Spot Lights AC

27



AC Cafeteria



- FEATURES:**
- Passive cooling
 - No driver required
 - Tilt and rotate action
- FEATURES:**
- Supplied with protective glass
 - Optimal design minimum lumen maintenance: 50 000h (L70B50)
 - Good light



Ordering example: Product Name/CRI/Kelvin/COB/Beam Angle/Luminaire Colour/W (e.g. ACCafeteria/80/30/240/15/W12)


Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+	3-Step MacAdam	3 - Phase Tracks	Powder Painted Die-cast Aluminium	COB CLC240/250: S 15° FL 24° WFL 35°	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Silver

LED Module: 240 - COB luminous flux: Power: 700mA

Output Current / Module Wattage / Luminaire Wattage:	CRI 80+ 2700K	CRI 80+ 3000K	CRI 80+ 4000K	CRI 90+ 3500K Below BBL
11.8W	-	-	1200Lm	-
12W	-	1200Lm	-	-
12.8W	1200Lm	-	-	-
13.3W	-	-	-	1200Lm

LED Module: 250 - COB luminous flux: Power: 700mA

Output Current / Module Wattage / Luminaire Wattage:	CRI 80+ 2700K	CRI 80+ 3000K	CRI 80+ 4000K	CRI 90+ 3500K Below BBL
20.1W	2200Lm	-	-	-
19.6W	-	2200Lm	-	-
18.4W	-	-	2200Lm	-
21.6W	-	-	-	2200Lm

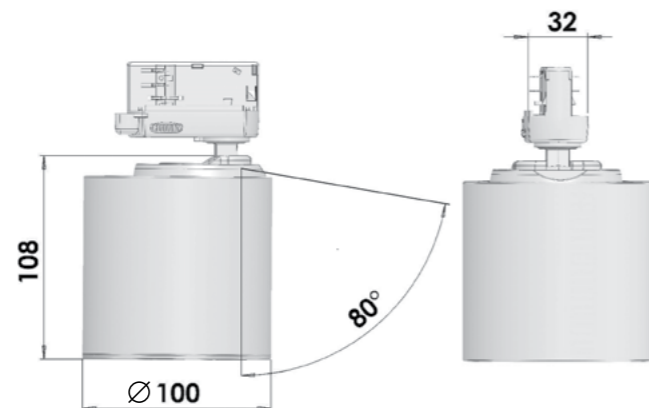

Various Kelvin and CRI options available to suit project requirements

AC Standard



- FEATURES:**
- Passive cooling
 - No driver required
 - Tilt and rotate action
- FEATURES:**
- Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L70B50)



Ordering example: Product Name/CRI/Kelvin/COB/Beam Angle/Luminaire Colour/W (e.g. ACStandard/80/27/240/10/W12)


Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+	3-Step MacAdam	3 - Phase Tracks	Powder Painted Die-cast Aluminium	COB CLC240: S 10° NFL 24° FL 30° WFL 50°	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Silver

LED Module: 240 - COB luminous flux:

Output Current / Module Wattage / Luminaire Wattage:	CRI 80+ 2700K	CRI 80+ 3000K	CRI 80+ 4000K	CRI 90+ 3500K Below BBL
12W	-	1200Lm	1200Lm	-
13W	1200Lm	-	-	1200Lm

LED Module: 250 - COB luminous flux:

Output Current / Module Wattage / Luminaire Wattage:	CRI 80+ 2700K	CRI 80+ 3000K	CRI 80+ 4000K	CRI 90+ 3500K Below BBL
20W	-	2228Lm	-	-
22W	-	-	-	2172Lm

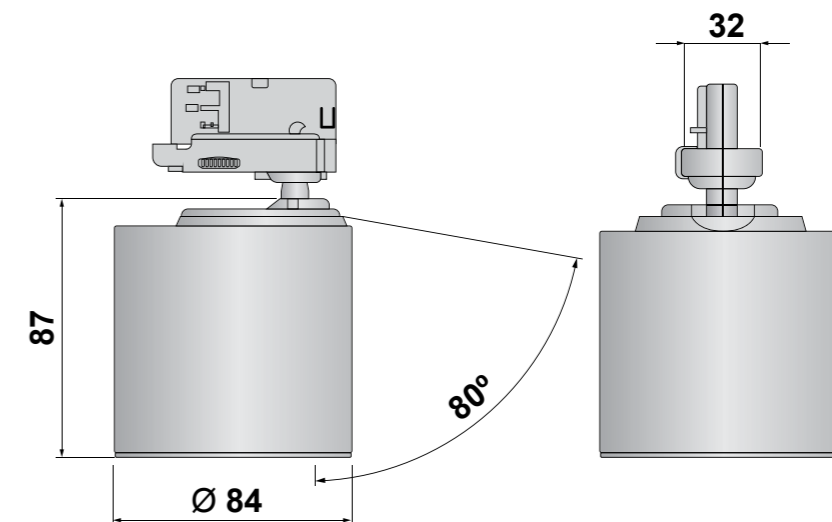

Various Kelvin and CRI options available to suit project requirements

AC Casa




- FEATURES:**
- Passive cooling
 - No driver required
 - Tilt and rotate action
 - Supplied with protective glass
 - Minimum lumen maintenance: 50 000h (L70B50)

Ordering example: Product Name/CRI/Kelvin/Beam Angle/Luminaire Colour/W (e.g. ACCasa/80/30/15/W/12)

Input Power	LED-Modules	Colour Consistency	Installation Type	Material	Beam Angles	Luminaire Colour
220 - 240V	CRI 80+ and CRI 90+	3-Step MacAdam	3 - Phase Tracks	Powder Painted Die-cast Aluminium	COB CLC240: S 15° FL 24°	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Silver

LED Module: 240 - COB luminous flux:


Output Current / Module Wattage / Luminaire Wattage:	CRI 80+ 2700K	CRI 80+ 3000K	CRI 80+ 4000K	CRI 90+ 3500K Below BBL
11.8W	-	-	1200Lm	-
12W	-	1200Lm	-	-
12.8W	1200Lm	-	-	-
13.3W	-	-	-	1200Lm

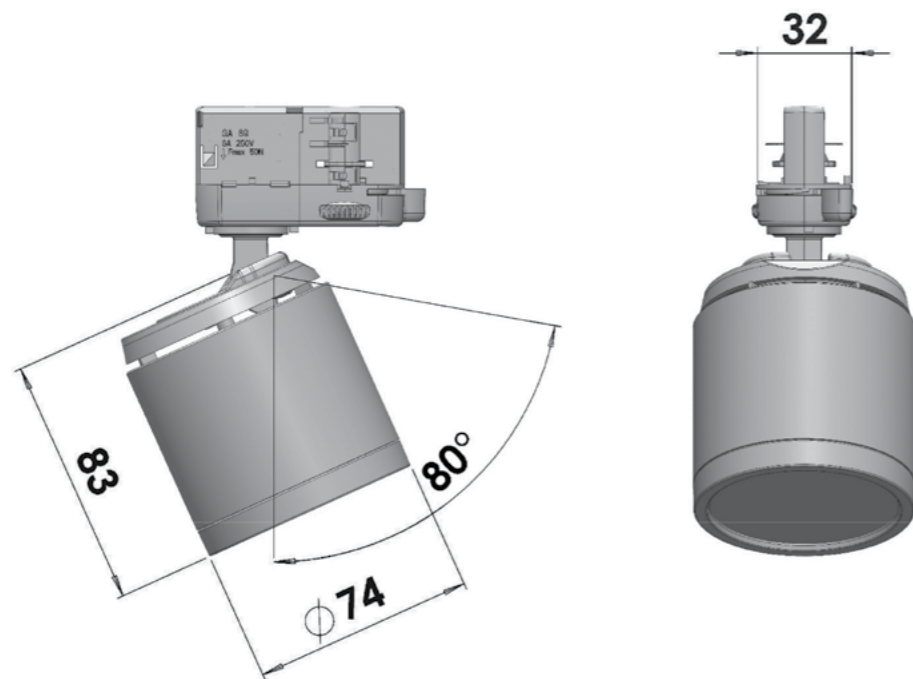

Various Kelvin and CRI options available to suit project requirements

Track Linear Lights

31



Respect Single



FEATURES:
• Ideal for general lighting retail applications

Ordering example: Product Name/CRI/Kelvin/Diffuser (e.g. RespectS/80/30/O)

Input Power	LED-Modules	Installation Type	Material	Diffuser Types	Luminaire Colour
220 - 240V	CRI 80+ 3000K, 4000K	3 - Phase Tracks	Powder Painted Extruded Aluminium / Polycarbonate	Opal Diffuser Direct Lens	○ White

COB luminous flux:		Power: 500mA	
Output Current / Luminaire Wattage:	CRI 80+ 3000K	CRI 80+ 4000K	
	500mA / 15W	1770Lm	1800Lm

Respect Double




FEATURES:
• Ideal for general lighting retail applications


Ordering example: Product Name/CRI/Kelvin/Diffuser (e.g. RespectD/80/30/O)

Input Power	LED-Modules	Installation Type	Material	Diffuser Types	Luminaire Colour
220 - 240V	CRI 80+ 3000K, 4000K	3 - Phase Tracks	Powder Painted Extruded Aluminium / Polycarbonate	Opal Diffuser Direct Lens Double Asymmetrical Lens	○ White

COB luminous flux:		Power: 500mA	
Output Current / Luminaire Wattage:	CRI 80+ 3000K	CRI 80+ 4000K	
	500mA / 27W	3540Lm	3600Lm

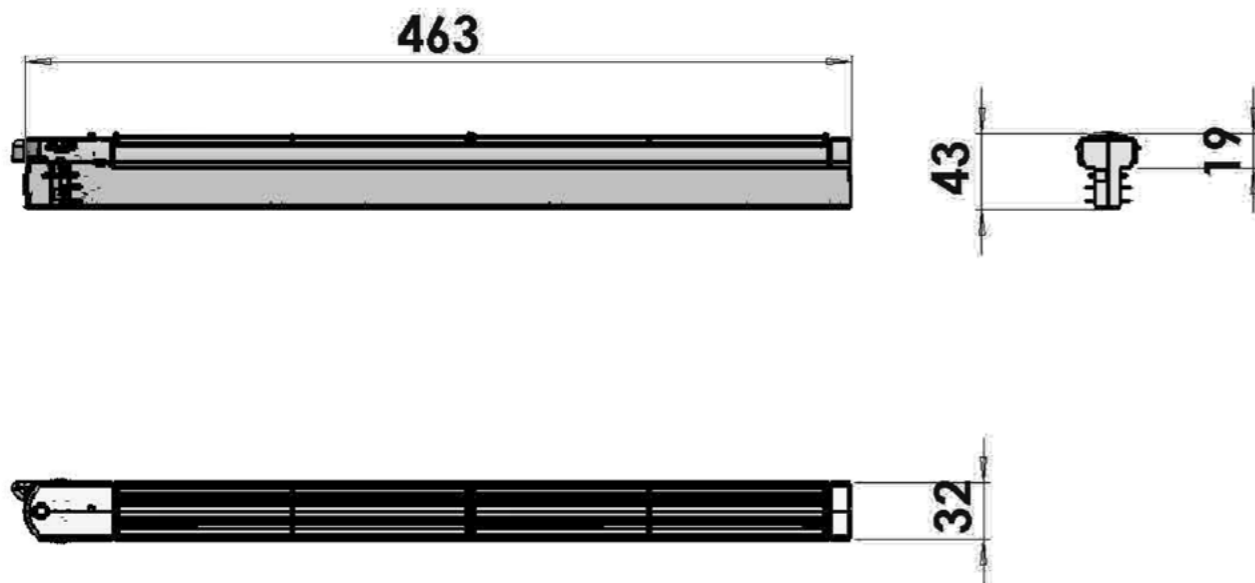

Various Kelvin and CRI options available to suit project requirements

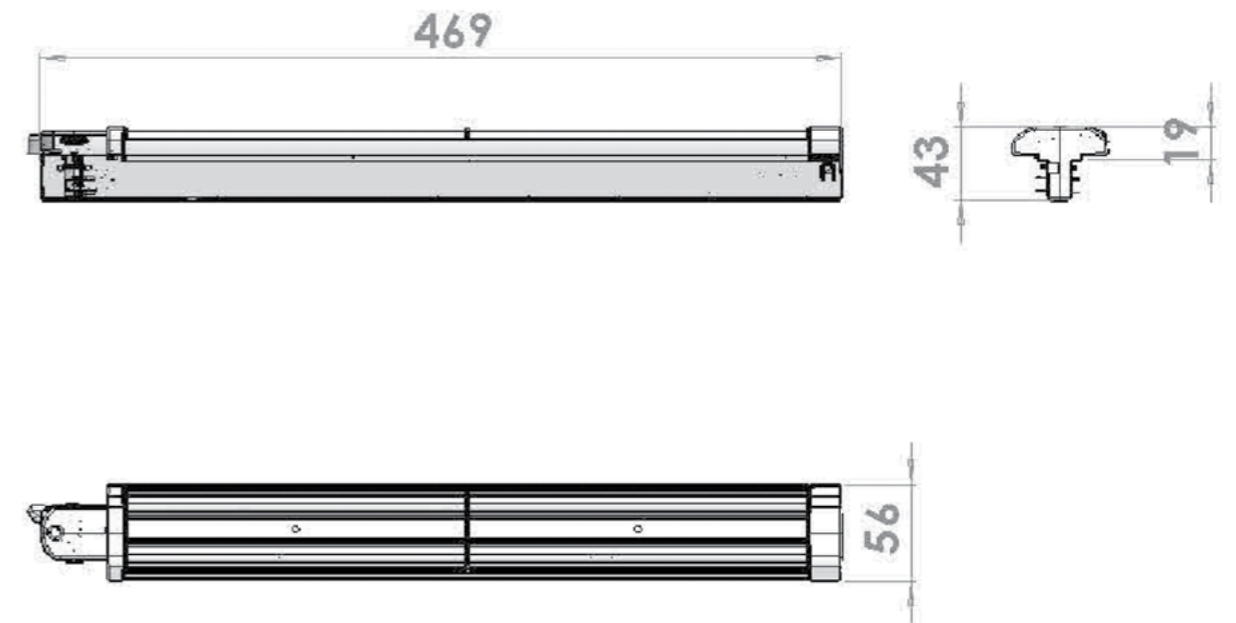

Various Kelvin and CRI options available to suit project requirements

Scope




FEATURES:
• Ideal for general lighting and wallwashing retail applications

Ordering example: Product Name/CRI/Kelvin/Diffuser/Luminaire Colour (e.g. Scope/80/30/O/W)

Input Power	LED-Modules	Installation Type	Material	Diffuser Types	Luminaire Colour
220 - 240V	CRI 80+ 3000K, 4000K	3 - Phase Tracks	Powder Painted Extruded Aluminium / Polycarbonate	Opal Diffuser Direct Lens Double Asymmetrical Lens	<input type="radio"/> White <input type="radio"/> Black

COB luminous flux:		Power: 500mA
Output Current / Module Wattage / Luminaire Wattage:	CRI 80+ 3000K	CRI 80+ 4000K
	500mA / 27W	3540Lm

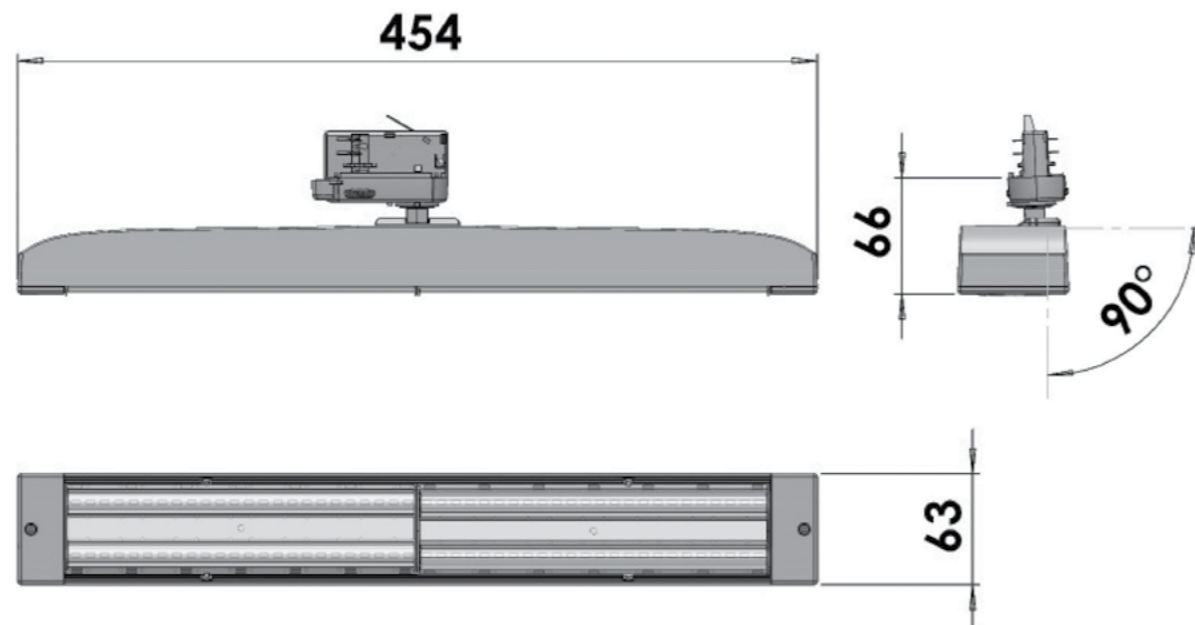

Various Kelvin and CRI options available to suit project requirements

Nano



FEATURES:
• Ideal for supermarket aisles and wallwashing retail applications


Ordering example: Product Name/CRI/Kelvin/Diffuser/Luminaire Colour (e.g. Nano/80/30/O/W)

Input Power	LED-Modules	Installation Type	Material	Diffuser Types	Luminaire Colour
220 - 240V	CRI 80+ 3000K, 4000K	3 - Phase Tracks	Powder Painted Extruded Aluminium / Polycarbonate	Opal Diffuser Micro Prism Lens Double Asymmetric Lens	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Silver


COB luminous flux:		Power: 350mA	
Length / Output Current / Luminaire Wattage:	CRI 80+ 3000K	CRI 80+ 4000K	
	812mm / 350mA / 56W	6850Lm	7000Lm
	1212mm / 350mA / 82W	11600Lm	12100Lm
	2412mm / 2 x 350mA / 2 x 82W	2 x 11600Lm	2 x 12100Lm

DIFFUSER OPTIONS:


- Opal Diffuser

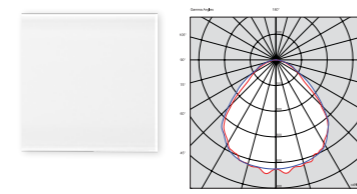

- Micro Prism Lens

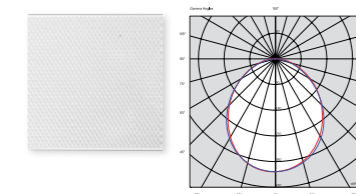

- Double Asymmetric Lens

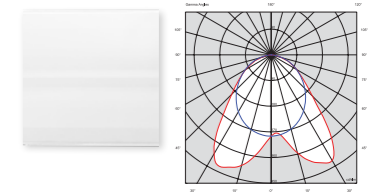


MOUNTING OPTIONS:

- Tilt Adaptor



- Double Adaptor

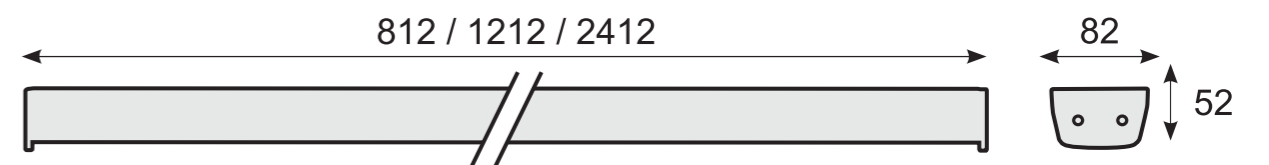

Various Kelvin and CRI options available to suit project requirements

Nano-X Linear



- FEATURES:
- UGR <19 low-glare
 - Multi-purpose design
 - Flicker free

Ordering example: Product Name/CRI/Kelvin/Diffuser/Louver/Mounting/Luminaire Colour (e.g. Nano-X/80/30/O/L/NXA/W)

Input Power	LED-Modules	Installation Type	Material	Diffuser Types	Luminaire Colour
220 - 240V	CRI 80+	1-2 Adaptor Fixed Ceiling Bracket Rail Bracket Wire Suspension	Powder Painted Extruded Aluminium / Polycarbonate	Opal Diffuser Microprismatic Nano Double Asymmetric	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Silver

COB luminous flux: Power: 350mA

Length / Output Current / Luminaire Wattage:	CRI 80+ 3000K	CRI 80+ 4000K
800mm / 350mA / 53W	4925Lm	5025Lm
1200mm / 350mA / 81W	7675Lm	8175Lm
2400mm / 2 x 350mA / 2 x 160W	2 x 14275Lm	2 x 14775Lm

DIFFUSER OPTIONS:

- Opal Diffuser (O)
- Microprismatic Lens - UGR <19 (MP)
- Nano Double Asymmetric Lens (DA)

LOUVER OPTIONS:


- Louver (L)
- Low-glare louver (LGL)

MOUNTING OPTIONS:

- 1-2 Adaptor Fixed (NXAF1/2)
- Ceiling Bracket (NXCB)
- Rail Bracket (NXRB)
- Wire Suspension (NXWS)

CONNECTION OPTIONS:

- Continuous Mounting (CM)

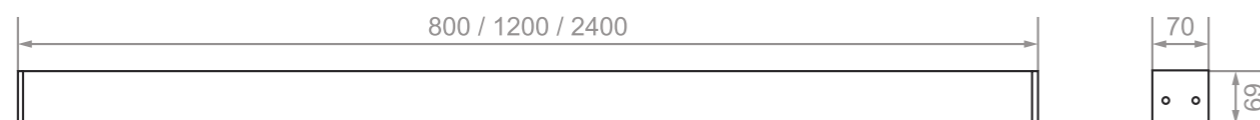

Various Kelvin and CRI options available to suit project requirements



Contact us

Cape Town

100 Upper Canterbury Street
Gardens, Cape Town
Western Cape, 8001
+27 21 464 4661

Johannesburg

Unit 5a Galaxy Park,
Galaxy Road Linbro Park,
Johannesburg
Gauteng, 1401
+27 11 262 5179

Pretoria

Unit 11, Lenchen Park
Lenchen Road South,
Centurion
Gauteng, 0157
+27 12 663 5921

Port Elizabeth

4 Reith Street
Sidwell, Port Elizabeth
Eastern Cape, 6061

+27 41 817 5535

Durban

Unit L, Nandi Park, 34 Brickworks
Way Briardene, Durban
Kwazulu Natal, 4051
+27 31 001 2964


Namibia

Unit 2, Tesoro Building
31 TV More Street
Windhoek
+264 61 400 339

Rest of Africa

Regus Office Space, 1st Floor,
Willowbridge Centre, Carl Cronje
Drive Belville Park, Cape Town
Western Cape, 7530
+27 21 974 6100 (Ext 6131)

Email: info@province.co.za
Website: www.provincelighting.com

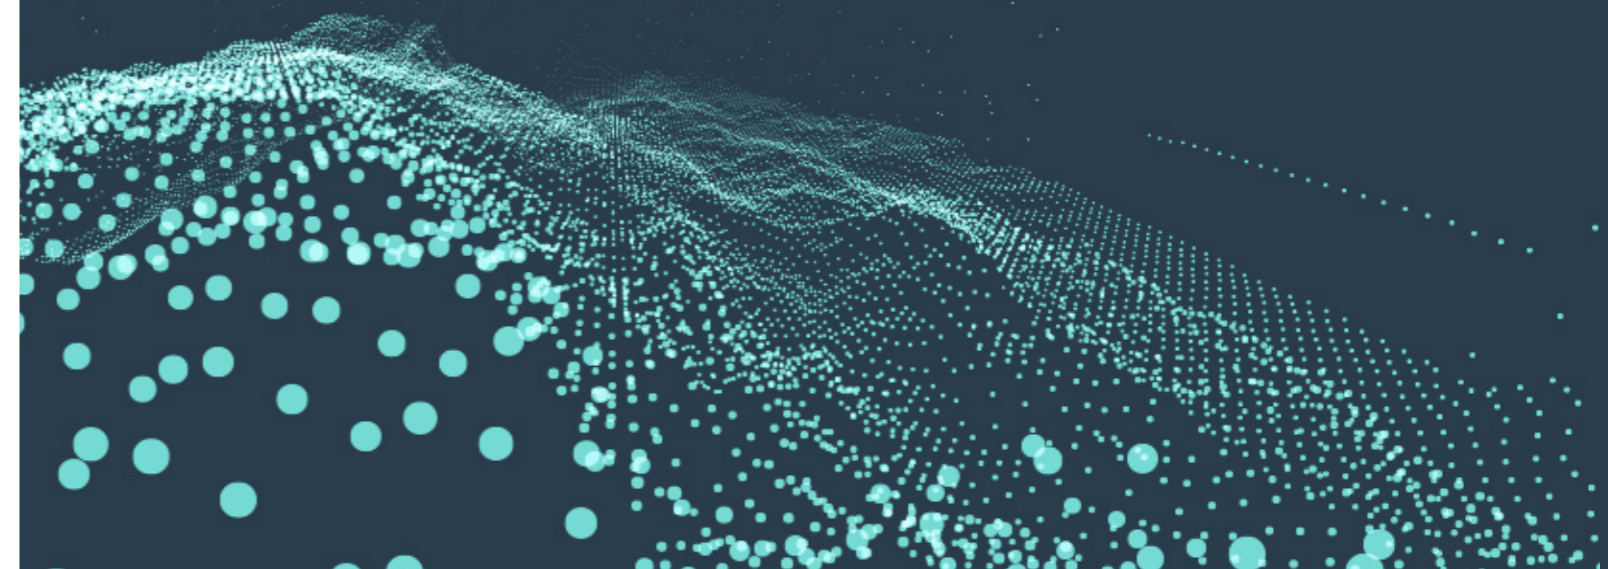

DISCLAIMER: While every effort has been made to ensure that the information contained within this catalogue is accurate and up to date, Rubicon Lighting makes no warranty, representation or undertaking whether expressed or implied, nor does it assume any legal liability, whether direct or indirect, or responsibility for the accuracy, completeness, or usefulness of any information.