



RUBICON
LIGHTING

1200LM LED Strip

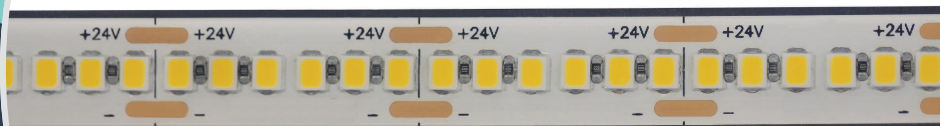

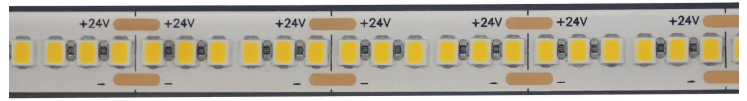


Features:

- 240 LED P/M
- 100mm Cut Sections
- Capable Of Operating Up To 5M In Either Direction Without A Voltage Drop
- Minimum Lumen Maintenance: 50 000h (L80B10)

Power Supply:	24V				
Operating Temperature Range: (Ta - Ambient)	- 20°C to 35°C				
Colour Rendering Index:	CRI 80+				
Colour Consistency:	3-Step MacAdam				
Colour Temperature: (Kelvin / CCT)	<input checked="" type="radio"/> 3000K <input type="radio"/> 4000K				
Beam Angle:	120°				
Installation Types:	Fitted into aluminium profiles: LF5_LF18_LF18Flat_LF18FlatR_LF20_LF45_LF45Tab				
Ingress Protection:	IP20				
	Dimensions	Wattage (System)	CRI	Kelvin	Luminous Flux (Effective)
	10mm x 100mm Increments	9.6W P/M	80+	3000K	1200Lm* P/M
	10mm x 100mm Increments	9.6W P/M	80+	4000K	1310Lm* P/M

Dimensions:

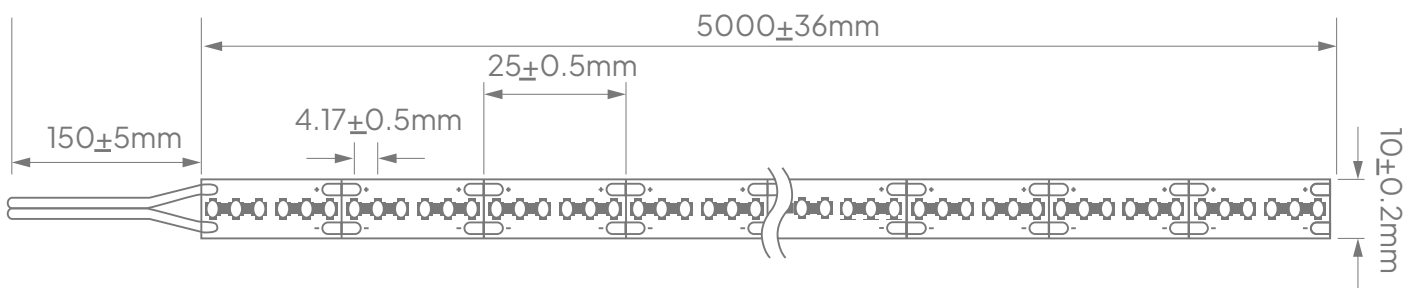

*E & O.E (Errors And Omissions Excepted)

*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

Contact

Cape Town

1B Hansen Close,
Richmond Park,
Cape Town
T. +27 21 555 0570

Durban

Unit L, Nandi Park,
34 Brickworks Way
Briardene
T. +27 31 001 2964

Namibia – Windhoek

Unit 2, Tesoro Building,
31 TV More Street
Windhoek
T. +264 61 40 0339

Johannesburg

17 Galaxy Road,
Unit 5A Galaxy Park,
Linbro Park
T. +27 11 262 5179

Port Elizabeth

216 Main Road,
Walmer
Port Elizabeth
T. +27 41 451 4359